



AXIAL SILASTIC GUARD JUNCTION STANDARD RECTIFIER

1N4001G THRU 1N4007G

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


1.0 Ampere

FEATURES

- Glass passivated chip junction
- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed
260°C/10 secods,0.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012ounce, 0.33 grams

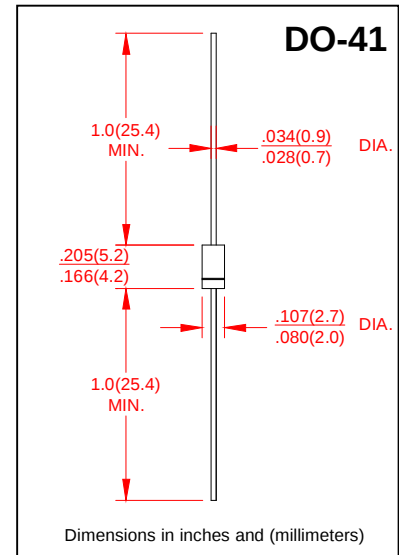

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	1N 4001G	1N 4002G	1N 4003G	1N 4004G	1N 4005G	1N 4006G	1N 4007G	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current(FIG.1) 0.375”(9.5mm) lead length at T _A =75℃	I _(AV)	1.0							Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A	V _F	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at	T _A = 25℃	5.0							μA
	T _A = 125℃	50							
Maximum Full Load Reverse Current, full cycle Average 0.375(9.5mm) lead length at T _L =75℃	I _{R(AV)}	30							μA
Typical Junction Capacitance (NOTE 1)	C _J	15							pF
Typical Thermal Resistance (NOTE 2)	R _{θJA}	50							℃/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							℃

Notes:

- 1.Measured at 1.0MHz and applied reverse voltage of 4.0 Volits.
2. Thermal Resistance from Junction to Ambient at. 375"(9.5mm)lead length, P.C. board mounted.



AXIAL SILASTIC GUARD JUNCTION STANDARD RECTIFIER

1N4001G THRU 1N4007G

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 1.0 Ampere

RATING AND CHARACTERISTIC CURVES 1N4001G THRU 1N4007G

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

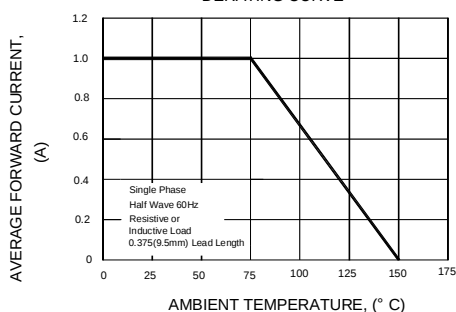


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

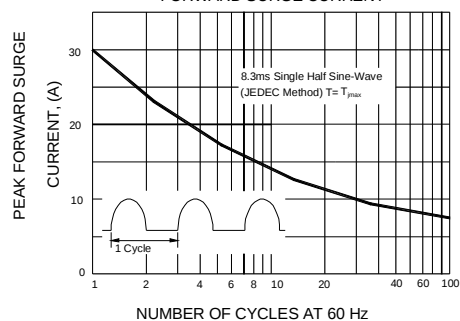


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

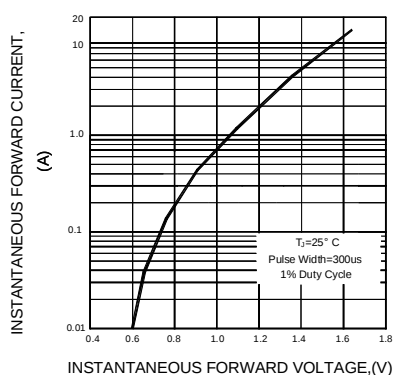


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

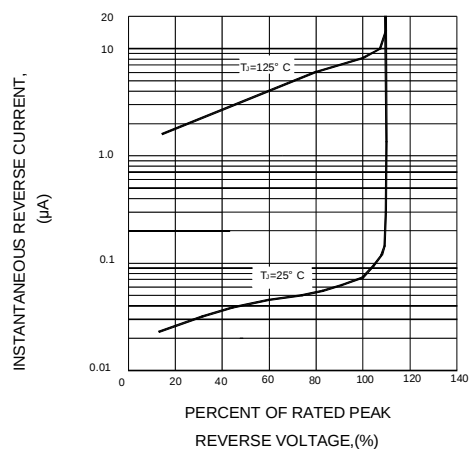


FIG.5-TYPICAL JUNCTION CAPACITANCE

