


# Fast Recovery Rectifier

## 1N3890A — 1N3893A

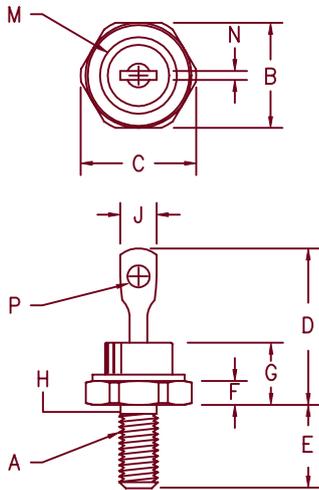

- Notes:
- 10-32 UNF3A threads
  - Full threads within 2 1/2 threads
  - Standard Polarity: Stud is Cathode  
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	---	.800	---	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.90	4.44	
G	---	.405	---	10.29	
H	.163	.189	4.14	4.80	2
J	---	.250	---	6.35	
M	---	.424	---	10.77	Dia.
N	.020	.065	.510	1.65	
P	.060	---	1.52	---	Dia.

D0203AA (D04)

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
1N3890A*	100V	100V
1N3891A*	200V	200V
1N3892A*	300V	300V
1N3893A*	400V	400V

\*Add Suffix R For Reverse Polarity

- Fast Recovery Rectifier
- 175°C Junction Temperature
- V<sub>RRM</sub> 100 to 400 Volts
- 20 Amps Current Rating

### Electrical Characteristics

Average forward current	I <sub>F(AV)</sub> 20 Amps	T <sub>C</sub> = 100°C, Square wave, R <sub>θJC</sub> = 1.5°C/W
Maximum surge current	I <sub>FSM</sub> 250 Amps	8.3 ms, half sine T <sub>C</sub> = 100°C
Max peak forward voltage	V <sub>FM</sub> 1.50 Volts	I <sub>FM</sub> = 38A T <sub>J</sub> = 25°C*
Max peak reverse current	I <sub>RM</sub> 2 mA	V <sub>RRM</sub> , T <sub>J</sub> = 150°C
Max peak reverse current	I <sub>RM</sub> 10 μA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Max reverse recovery time	t <sub>RR</sub> 150 ns	I <sub>F</sub> = 1A dc, V <sub>R</sub> = 30V, di/dt = 25A/μs, T <sub>C</sub> = 55°C
Typical junction capacitance	C <sub>J</sub> 115 pF	V <sub>R</sub> = 10V, f = 1Mhz, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-65°C to 175°C
Operating junction temp range	T <sub>J</sub>	-65°C to 175°C
Max thermal resistance	R <sub>θJC</sub>	1.5°C/W Junction to case
Mounting torque		12-15 inch pounds
Weight		.16 ounces (5.0 grams) typical

# 1N3890A — 1N3893A

Figure 1  
Typical Forward Characteristics



Figure 3  
Typical Junction Capacitance

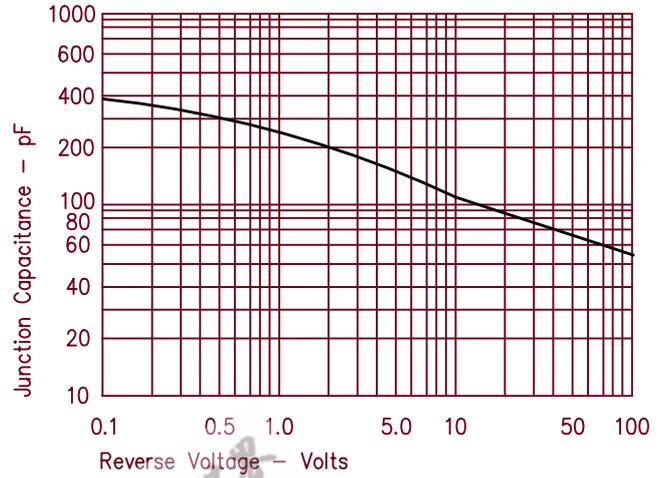


Figure 4  
Forward Current Derating

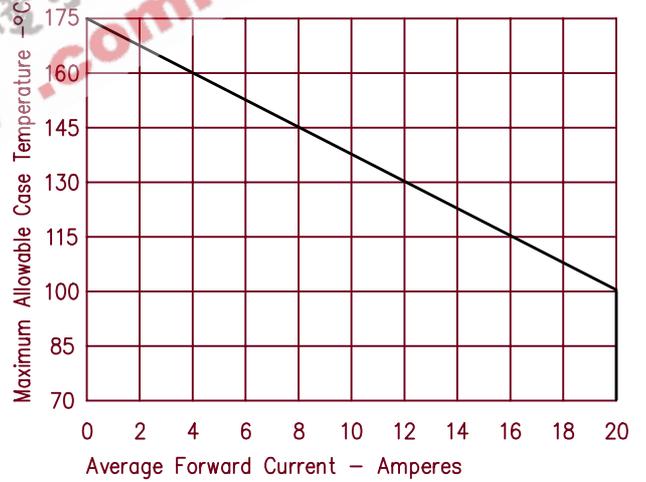


Figure 2  
Typical Reverse Characteristics

