

- 1N3016B-1 thru 1N3045B-1 AVAILABLE IN JAN, JANTX AND JANTXV PER MIL-PRF-19500/115
- 1 WATT ZENER DIODES
- METALLURGICALLY BONDED

1N3016B thru 1N3045B  
and  
1N3016B-1 thru 1N3045B-1

## MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C  
Storage Temperature: -65°C to +175°C  
DC Power Dissipation: 1 watt @  $T_L = +95^\circ\text{C}$   
Power Derating: 12.5 mW / °C above  $T_L = +95^\circ\text{C}$   
Forward Voltage @ 200mA: 1.2 volts maximum

## ELECTRICAL CHARACTERISTICS @ 25°C

| CDI TYPE NUMBER<br>(NOTE 1) | NOMINAL ZENER VOLTAGE<br>$V_Z @ 1Z_T$<br>(NOTE 2) | ZENER TEST CURRENT<br>$1Z_T$ | MAXIMUM ZENER IMPEDANCE<br>(NOTE 3) |      |                 | MAX. DC ZENER CURRENT<br>$1Z_M$ | MAX. REVERSE LEAKAGE CURRENT<br>$I_R @ V_R$ |       |
|-----------------------------|---|------------------------------|-------------------------------------|------|-----------------|---------------------------------|---|-------|
|                             |   |                              | $Z_{ZT} @ 1Z_T$                     |      | $Z_{ZK} @ 1Z_K$ |                                 | $\mu\text{A}$                               | VOLTS |
|                             |   |                              | OHMS                                | OHMS |                 |                                 |   |       |
| 1N3016B                     | 6.8   | 37                           | 3.5                                 | 700  | 1.0             | 140                             | 5.0   | 5.2   |
| 1N3017B                     | 7.5   | 34                           | 4.0                                 | 700  | .5              | 125                             | 5.0   | 5.7   |
| 1N3018B                     | 8.2   | 31                           | 4.5                                 | 700  | .5              | 115                             | 5.0   | 6.2   |
| 1N3019B                     | 9.1   | 28                           | 5                                   | 700  | .5              | 105                             | 5.0   | 6.9   |
| 1N3020B                     | 10  | 25                           | 7                                   | 700  | .25             | 95                              | 5.0   | 7.6   |
| 1N3021B                     | 11  | 23                           | 8                                   | 700  | .25             | 85                              | 1.0   | 8.4   |
| 1N3022B                     | 12  | 21                           | 9                                   | 700  | .25             | 80                              | 1.0   | 9.1   |
| 1N3023B                     | 13  | 19                           | 10                                  | 700  | .25             | 74                              | 0.5   | 9.9   |
| 1N3024B                     | 15  | 17                           | 14                                  | 700  | .25             | 63                              | 0.5   | 11.4  |
| 1N3025B                     | 16  | 15.5                         | 16                                  | 700  | .25             | 60                              | 0.5   | 12.2  |
| 1N3026B                     | 18  | 14                           | 20                                  | 750  | .25             | 52                              | 0.5   | 13.7  |
| 1N3027B                     | 20  | 12.5                         | 22                                  | 750  | .25             | 47                              | 0.5   | 15.2  |
| 1N3028B                     | 22  | 11.5                         | 23                                  | 750  | .25             | 43                              | 0.5   | 16.7  |
| 1N3029B                     | 24  | 10.5                         | 25                                  | 750  | .25             | 40                              | 0.5   | 18.2  |
| 1N3030B                     | 27  | 9.5                          | 35                                  | 750  | .25             | 34                              | 0.5   | 20.6  |
| 1N3031B                     | 30  | 8.5                          | 40                                  | 1000 | .25             | 31                              | 0.5   | 22.8  |
| 1N3032B                     | 33  | 7.5                          | 45                                  | 1000 | .25             | 28                              | 0.5   | 25.1  |
| 1N3033B                     | 36  | 7.0                          | 50                                  | 1000 | .25             | 26                              | 0.5   | 27.4  |
| 1N3034B                     | 39  | 6.5                          | 60                                  | 1000 | .25             | 23                              | 0.5   | 29.7  |
| 1N3035B                     | 43  | 6.0                          | 70                                  | 1500 | .25             | 21                              | 0.5   | 32.7  |
| 1N3036B                     | 47  | 5.5                          | 80                                  | 1500 | .25             | 19                              | 0.5   | 35.8  |
| 1N3037B                     | 51  | 5.0                          | 95                                  | 1500 | .25             | 18                              | 0.5   | 38.8  |
| 1N3038B                     | 56  | 4.5                          | 110                                 | 2000 | .25             | 17                              | 0.5   | 42.6  |
| 1N3039B                     | 62  | 4.0                          | 125                                 | 2000 | .25             | 15                              | 0.5   | 47.1  |
| 1N3040B                     | 68  | 3.7                          | 150                                 | 2000 | .25             | 14                              | 0.5   | 51.7  |
| 1N3041B                     | 75  | 3.3                          | 175                                 | 2000 | .25             | 12                              | 0.5   | 56.0  |
| 1N3042B                     | 82  | 3.0                          | 200                                 | 3000 | .25             | 11                              | 0.5   | 62.2  |
| 1N3043B                     | 91  | 2.8                          | 250                                 | 3000 | .25             | 10                              | 0.5   | 69.2  |
| 1N3044B                     | 100   | 2.5                          | 350                                 | 3000 | .25             | 9.0                             | 0.5   | 76.0  |
| 1N3045B                     | 110   | 2.3                          | 450                                 | 4000 | .25             | 8.3                             | 0.5   | 83.6  |

**NOTE 1** No suffix signifies  $\pm 20\%$ . "A" Suffix signifies  $\pm 10\%$ , "B" Suffix signifies  $\pm 5\%$ , "C" suffix signifies  $\pm 2\%$ , "D" suffix signifies  $\pm 1\%$

**NOTE 2** Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of  $25^\circ\text{C} \pm 3^\circ\text{C}$ .

**NOTE 3** Zener impedance is derived by superimposing on  $1Z_T$  A 60Hz rms a.c. current equal to 10% of  $1Z_T$

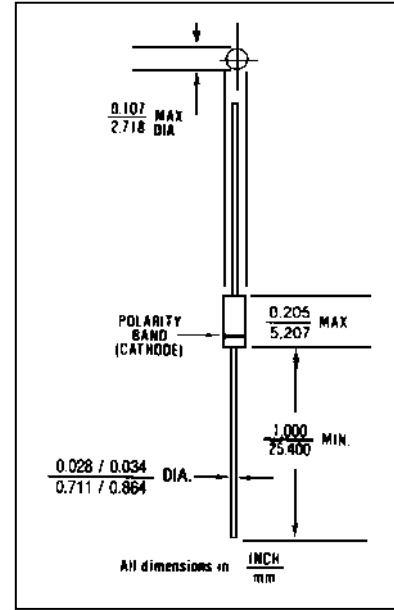


FIGURE 1

## DESIGN DATA

**CASE:** Hermetically sealed glass case DO-41.

**LEAD MATERIAL:** Copper clad steel

**LEAD FINISH:** Tin / Lead

**THERMAL RESISTANCE:** ( $R_{\theta JC}$ ): 80 °C/W maximum at  $L = .375$  inch

**THERMAL IMPEDANCE:** ( $Z_{\theta JX}$ ): 15 °C/W maximum

**POLARITY:** Diode to be operated with the banded (cathode) end positive.

**MOUNTING POSITION:** Any.




**COMPENSATED DEVICES INCORPORATED**

22 COREY STREET, MELROSE, MASSACHUSETTS 02176  
PHONE (781) 665-1071 FAX (781) 665-7379  
WEBSITE: <http://www.cdi-diodes.com> E-mail: [mail@cdi-diodes.com](mailto:mail@cdi-diodes.com)

# 1N3016 thru 1N3045B

FIGURE 2

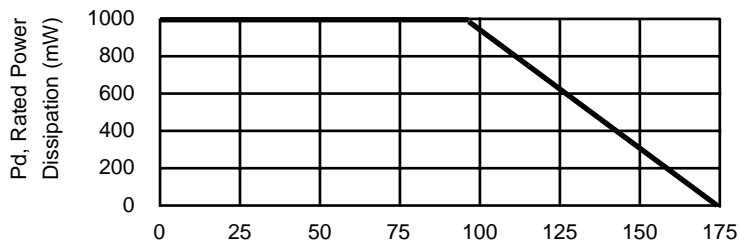

$T_L$ , Lead temperature (°C), 3/8" from body.

POWER DERATING CURVE

EEPW.com.cn 电子产品世界

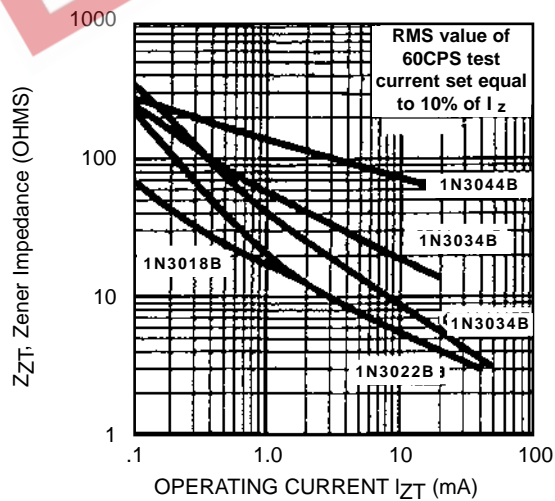


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT