



1N5926B THRU 1N5956B

GLASS PASSIVATED JUNCTION SILICON ZENER DIODE
 VOLTAGE - 11 TO 200 Volts Power - 1.5 Watts

FEATURES

- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Typical I_R less than 1 μ A above 11V
- High temperature soldering :
260 ϕ J/10 seconds at terminals
- Plastic package has Underwriters Laboratory
Flammability Classification 94V-0

MECHANICAL DATA


Case: JEDEC DO-41 Molded plastic over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750,
method 2026

Polarity: Color band denotes positive end (cathode)

Standard Packaging: 52mm tape

Weight: 0.012 ounce, 0.3 gram

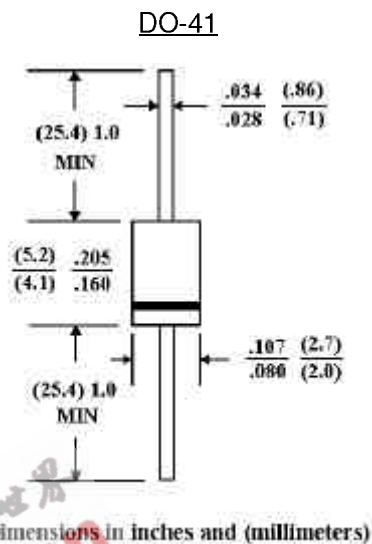

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ϕ J ambient temperature unless otherwise specified.

| | SYMBOL | VALUE | UNITS |
|---|----------------|-------------|-----------------------|
| DC Power Dissipation @ $T_L=75 \phi$ J, Measure at Zero Lead Length(Note 1, Fig. 1) Derate above 75 ϕ J | P_D | 1.5 15 | Watts mW/ ϕ J |
| Peak forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC Method) (Note 1,2) | I_{FSM} | 10 | Amps |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -55 to +150 | ϕ J |

NOTES:

1. Mounted on 5.0mm²(.013mm thick) land areas.
2. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.
3. ZENER VOLTAGE (V_Z) MEASUREMENT Nominal zener voltage is measured with the device function in thermal equilibrium with ambient temperature at 25 ϕ J.
4. ZENER IMPEDANCE (Z_Z) DERIVATION Z_{ZT} are measured by dividing the ac voltage drop across the device by the current applied. The specified limits are for $I_{Z(ac)} = 0.1 I_Z$, (dc) with the ac frequency = 60Hz.

1N5926B THRU 1N5956B

| ELECTRICAL CHARACTERISTICS ($T_L=30\text{ }^\circ\text{C}$ unless otherwise noted) ($V_F=1.5\text{ Volts Max @ }I_F=200\text{ mA}$) | | | | | | | | |
|--|--|--------------------------|-----------------------------------|--------------------------|-------------|-----------------------------|-------------|---|
| Device | Nominal Zener Voltage V_Z @ I_{ZT} volts (Note 1.) | Test current I_{ZT} mA | Maximum Zener Impedance (Note 2.) | | | Max reverse Leakage Current | | Maximum DC Zener Current I_{ZM} mA Dc |
| | | | Z_{ZT} @ I_{ZT} Ohms | Z_{ZK} @ I_{ZK} Ohms | I_{ZK} mA | I_R μgA | V_R Volts | |
| 1N5926B | 11 | 34.1 | 5.5 | 550 | 0.25 | 1 | 8.4 | 136 |
| 1N5927B | 12 | 31.2 | 6.5 | 550 | 0.25 | 1 | 9.1 | 125 |
| 1N5928B | 13 | 28.8 | 7 | 550 | 0.25 | 1 | 9.9 | 115 |
| 1N5929B | 15 | 25 | 9 | 600 | 0.25 | 1 | 11.4 | 100 |
| 1N5930B | 16 | 23.4 | 10 | 600 | 0.25 | 1 | 12.2 | 93 |
| 1N5931B | 18 | 20.8 | 12 | 650 | 0.25 | 1 | 13.7 | 83 |
| 1N5932B | 20 | 18.7 | 14 | 650 | 0.25 | 1 | 15.2 | 75 |
| 1N5933B | 22 | 17 | 17.5 | 650 | 0.25 | 1 | 16.7 | 68 |
| 1N5934B | 24 | 15.6 | 19 | 700 | 0.25 | 1 | 18.2 | 62 |
| 1N5935B | 27 | 13.9 | 23 | 700 | 0.25 | 1 | 20.6 | 55 |
| 1N5936B | 30 | 12.5 | 26 | 750 | 0.25 | 1 | 22.8 | 50 |
| 1N5937B | 33 | 11.4 | 33 | 800 | 0.25 | 1 | 25.1 | 45 |
| 1N5938B | 36 | 10.4 | 38 | 850 | 0.25 | 1 | 27.4 | 41 |
| 1N5939B | 39 | 9.6 | 45 | 900 | 0.25 | 1 | 29.7 | 38 |
| 1N5940B | 43 | 8.7 | 53 | 950 | 0.25 | 1 | 32.7 | 34 |
| 1N5941B | 47 | 8 | 67 | 1000 | 0.25 | 1 | 35.8 | 31 |
| 1N5942B | 51 | 7.3 | 70 | 1100 | 0.25 | 1 | 38.8 | 29 |
| 1N5943B | 56 | 6.7 | 86 | 1300 | 0.25 | 1 | 42.6 | 26 |
| 1N5944B | 62 | 6 | 100 | 1500 | 0.25 | 1 | 47.1 | 24 |
| 1N5945B | 68 | 5.5 | 120 | 1700 | 0.25 | 1 | 51.7 | 22 |
| 1N5946B | 75 | 5 | 140 | 2000 | 0.25 | 1 | 56 | 20 |
| 1N5947B | 82 | 4.6 | 160 | 2500 | 0.25 | 1 | 62.2 | 18 |
| 1N5948B | 91 | 4.1 | 200 | 3000 | 0.25 | 1 | 69.2 | 16 |
| 1N5949B | 100 | 3.7 | 250 | 3100 | 0.25 | 1 | 76 | 15 |
| 1N5950B | 110 | 3.4 | 300 | 4000 | 0.25 | 1 | 83.6 | 13 |
| 1N5951B | 120 | 3.1 | 380 | 4500 | 0.25 | 1 | 91.2 | 12 |
| 1N5952B | 130 | 2.9 | 450 | 5000 | 0.25 | 1 | 98.8 | 11 |
| 1N5953B | 150 | 2.5 | 600 | 6000 | 0.25 | 1 | 114 | 10 |
| 1N5954B | 160 | 2.3 | 700 | 6500 | 0.25 | 1 | 121.6 | 9 |
| 1N5955B | 180 | 2.1 | 900 | 7000 | 0.25 | 1 | 136.8 | 8 |
| 1N5956B | 200 | 1.9 | 1200 | 8000 | 0.25 | 1 | 152 | 7 |

* TOLERANCE AND VOLTAGE DESIGNATION Tolerance designation - The type numbers listed indicate a tolerance of $\pm 5\%$

RATING AND CHARACTERISTICS CURVES

1N5926B THRU 1N5956B

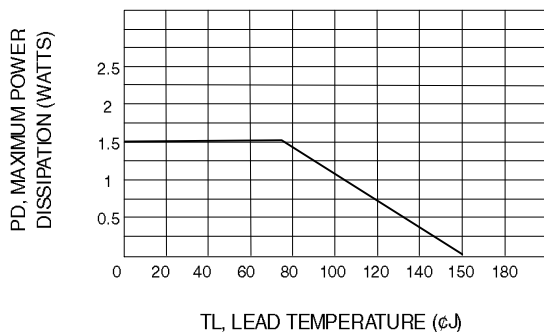


Fig. 1-STEADY STATE POWER DERATING

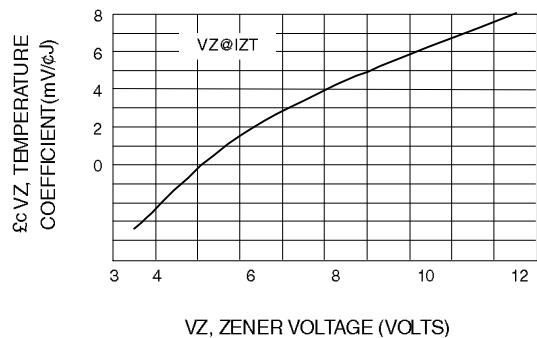


Fig. 2-ZENER VOLTAGE-TO 12 VOLTS

RATING AND CHARACTERISTICS CURVES

1N5926B THRU 1N5956B

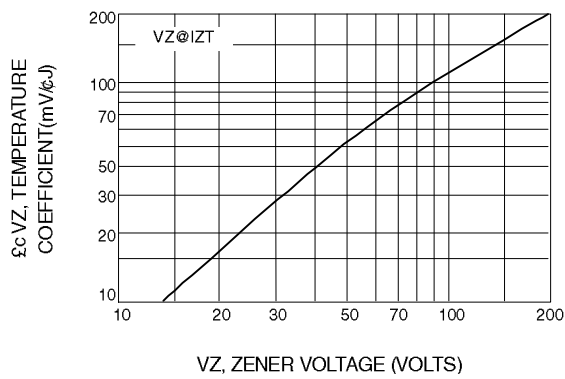


Fig. 3-ZENER VOLTAGE-10 TO 200 VOLTS

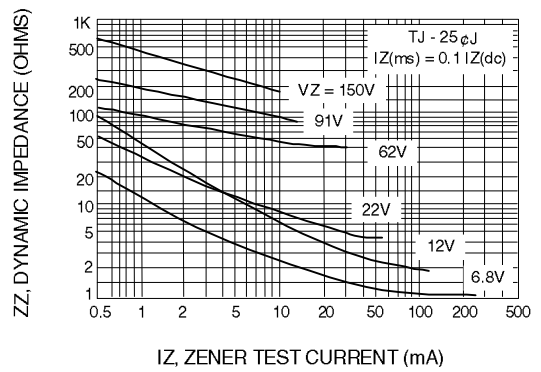


Fig. 4-EFFECT OF ZENER CURRENT

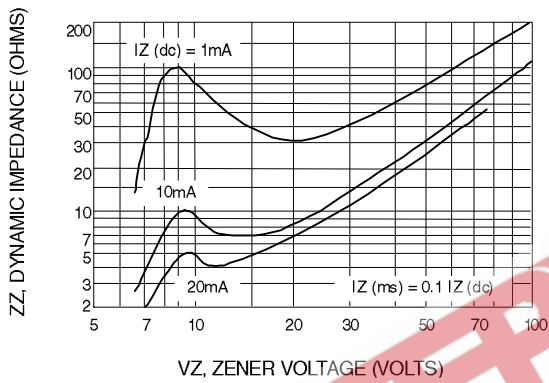


Fig. 7- $V_Z = 6.8$ THRU 10 VOLTS

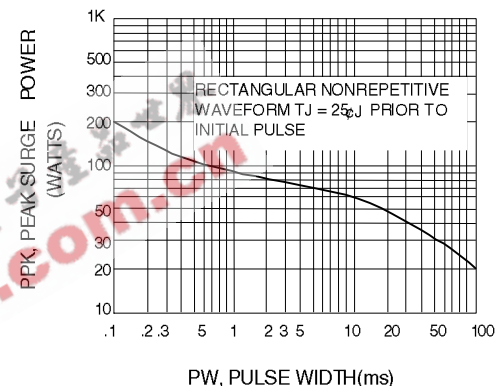


Fig. 8- $V_Z = 12$ THRU 82 VOLTS

