


Features

- Glass Passivated Die Construction
- Diffused Junction
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 125A Peak
- Plastic Material has UL Flammability Classification 94V-0

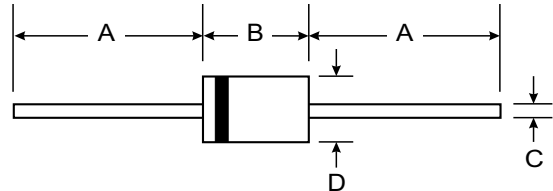

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.12 grams (approx)
- Mounting Position: Any
- Marking: Type Number


DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	1N5400G	1N5401G	1N5402G	1N5403G	1N5404G	1N5405G	1N5406G	1N5407G	1N5408G	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	50	100	200	300	400	500	600	800	1000	V
RMS Reverse Voltage	V _{R(RMS)}	35	70	140	210	280	350	420	580	700	V
Average Rectified Output Current (Note 1) @ T _A = 55°C	I _o	3.0									A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	125									A
Forward Voltage @ I _F = 3.0A	V _{FM}	1.1									V
Peak Reverse Current @ T _A = 25°C at Rated DC Blocking Voltage @ T _A = 125°C	I _{RM}	5.0 100									μA
Reverse Recovery Time (Note 3)	t _{rr}	2.0									μs
Typical Junction Capacitance (Note 2)	C _j	40									pF
Typical Thermal Resistance Junction to Ambient	R _{θJA}	32									K/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150									°C


- Notes:
1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
 3. Measured with I_F = 0.5A, I_R = 1.0A, t_{rr} = 0.25A.

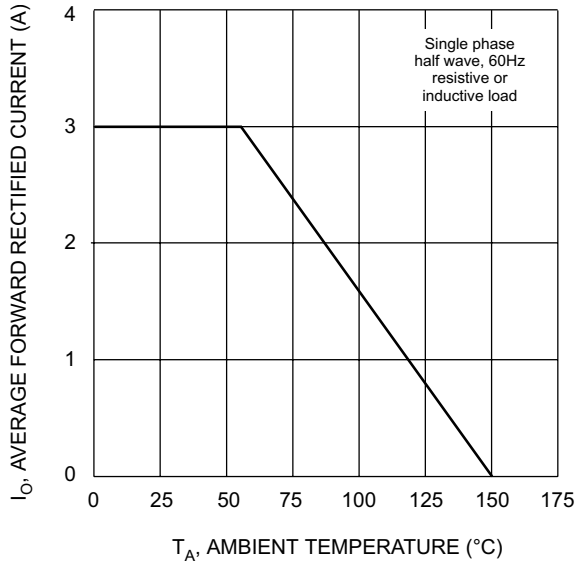


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1 Forward Current Derating Curve

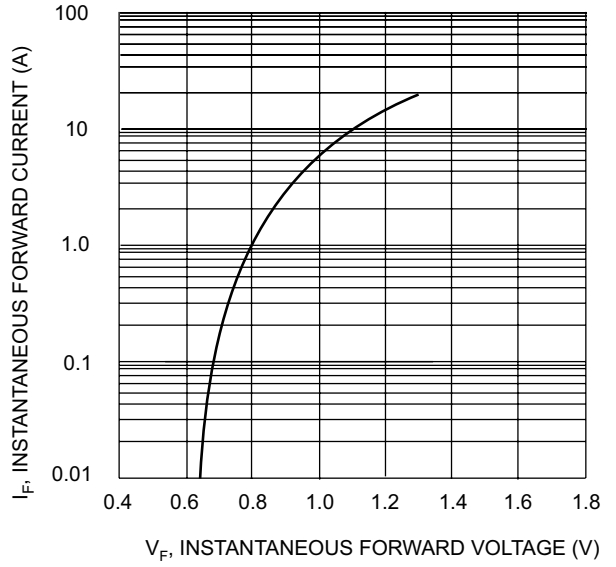


V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics

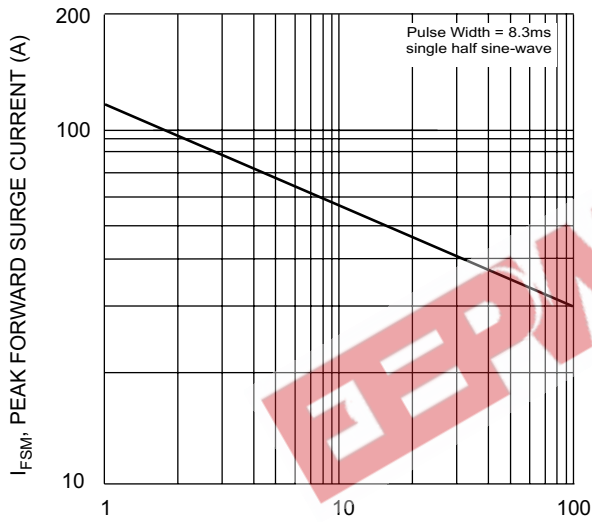

NUMBER OF CYCLES AT 60 Hz
Fig. 3 Peak Forward Surge Current

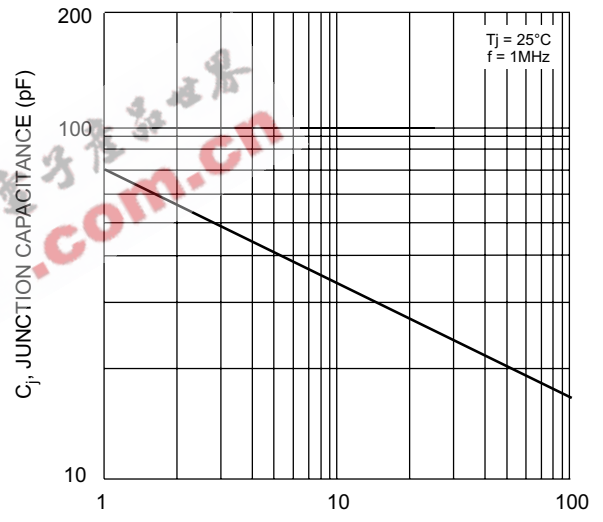

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Junction Capacitance

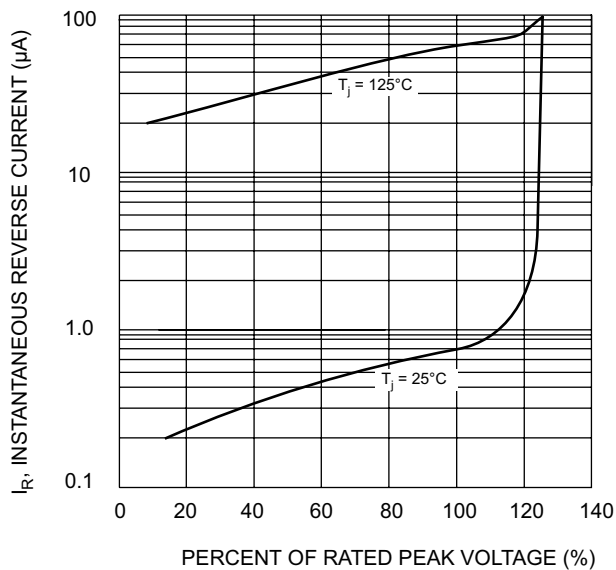

PERCENT OF RATED PEAK VOLTAGE (%)
Fig. 5 Typical Reverse Characteristics