

SENSITRON
SEMICONDUCTOR

1N6638/U
1N6639/U
1N6640/U
1N6641/U
1N6642/U
1N6643/U


TECHNICAL DATA
DATA SHEET 4081, REV. A

SIGNAL OR COMPUTER DIODE 1N6638 THRU 1N6643

- Switching Diode
 - Hermetic, non-cavity glass package
 - Metallurgically bonded
 - Upscreen to JANTX, JANTXV per MIL-PRF-19500/578,609 available
- Physical dimensions: Axial lead similar to Do-35 and surface mount similar to (D-5D)
Maximum ratings $T_A=+25^{\circ}\text{C}$:

Types	V_{BR}	V_{RWM}	I_o	I_{FSM} $T_p=1/120$ s	T_{STG}, T_J $^{\circ}\text{C}$	$R_{\theta JL}$ $L=.375$ $^{\circ}\text{C/W}$	$R_{\theta JEC}$ $L=0$ $^{\circ}\text{C/W}$	$Z_{\theta JX}$ $^{\circ}\text{C/W}$
1N6638,1N6638U	150	125	300	2.5	-65 to +175	160	50	25
1N6639,1N6639U	100	75	300	2.5	-65 to +175	160	50	25
1N6640,1N6640U	75	50	300	2.5	-65 to +175	160	50	25
1N6641,1N6641U	75	50	300	2.5	-65 to +175	160	50	25
1N6642,1N6642U	100	75	300	2.5	-65 to +175	160	50	25
1N6643, 1N6643U	75	50	300	2.5	-65 to +175	160	50	25


Axial

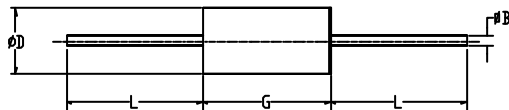

1N6638 thru 1N6643

PACKAG STYLE	DIMENSIONS - INCHES (MILLIMETERS)			
	ϕB	ϕD	G	L
DO-35	.018/.022 0.46/0.56	.056/.080 1.42/2.03	.130/.180 3.30/4.57	1.00/1.50 25.4/38.10

melf

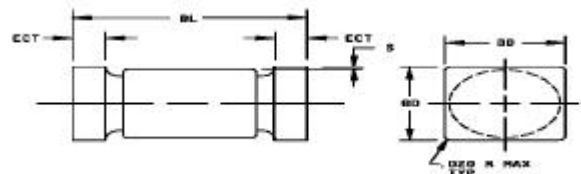

1N6638U thru 1N6643U

PACKAGE STYLE	DIMENSIONS - INCHES (MILLIMETERS)			
	BL	BD	S	ECT
D-5D	.165/.195 4.19/4.95	.070/.085 1.78/2.16	0.003 Min	.019/.028 0.48/0.71

1N6638/U
 1N6639/U
 1N6640/U
 1N6641/U
 1N6642/U
 1N6643/U

SENSITRON


TECHNICAL DATA
DATA SHEET 4081, REV. A

SIGNAL OR COMPUTER DIODE (DIE) 1C6638 THRU 1C6643 AND 1C4148

Types	V _{BR}	V _{RWM}	I _o	I _{FSM} T _p =1/120s	T _{STG} , T _J	V _{F1}	V _{F2}	I _{R1} @ V _R =20V	I _{R1} @ V _R = V _{RWM}	t _{tr} I _{RM} =I _F =10mA	C _{T1} V _R =0V
	V(pk)	V(pk)	mA	A(pk)	°C	V dc	V dc	nA dc	μA dc	ns	PF
1N6638, /578E	150	125	300	2.5	-65 to +175	0.80 (1)	1.1 (2)	35	0.5	4.5	2.5
1N6642, /578E	100	75	300	2.5	-65 to +175	0.80 (1)	1.2 (3)	25	0.5	5.0	5.0
1N6643, /578E	75	50	300	2.5	-65 to +175	0.80 (1)	1.2 (3)	50	0.5	6.0	5.0
1N6639, /609C	100	75	300	2.5	-65 to +175	1.20 (4)	-	-	0.1	4.0	2.5
1N6640, /609C	75	50	300	2.5	-65 to +175	1.00 (2)	-	-	0.1	4.0	2.5
1N6641, /609C	75	50	300	2.5	-65 to +175	1.10 (2)	-	-	0.1	5.0	3.0
1C4148, /116L	100	75	200	2.0	-65 to +200	0.80 (1)	1.2 (3)	25	0.5	5.0	-

- (1) I_F = 10 mA
- (2) I_F = 200 mA
- (3) I_F = 100 mA
- (4) I_F = 500 mA

1C6638 thru 1C6643
 and
 1C4148 Layout

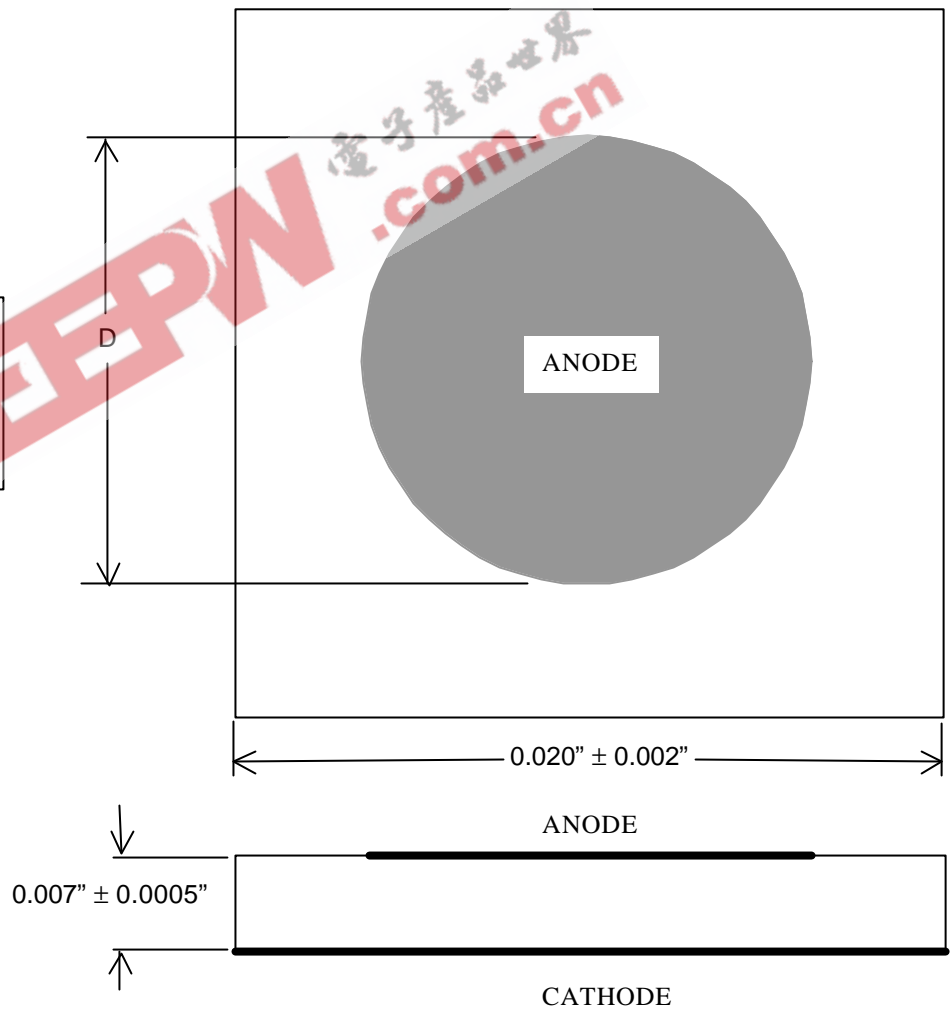

1N6638/U
1N6639/U
1N6640/U
1N6641/U
1N6642/U
1N6643/U

SENSITRON

TECHNICAL DATA

DATA SHEET 4081, REV. A

Table: Metal pad sizes:

	1C6638 thru 1C6643	1C4148
D	0.011" \pm 0.001"	0.009" \pm 0.001"

Top (anode) metallization: Al, 25 kA minimum or
Ti/Ni/Ag, 30 kA minimum or
Ti/Ni/Au, 13 kA minimum or
Au, 10 kA minimum

Bottom (cathode) metallization: Ti/Ni/Ag, 30 kA minimum or
Ti/Ni/Au, 12 kA minimum or
Au, 4 kA minimum

EEPW.com.cn 电子产品世界

SENSITRON

SEMICONDUCTOR

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.

EEPW.com.cn 电子产业网