

Gold Bonded**Germanium Diodes**

Optimized for Radio Frequency Response

Can be used in many AM, FM and TV-IF applications, replacing point contact devices.


Applications

- AM/FM detectors
- Ratio detectors
- FM discriminators
- TV audio detectors
- RF input probes
- TV video detectors

Features

- Lower leakage current
- Flat junction capacitance
- High mechanical strength
- At least 1 million hours MTBF
- BKC's Sigma-Bond™ plating for problem free solderability

DO-7 Glass Package

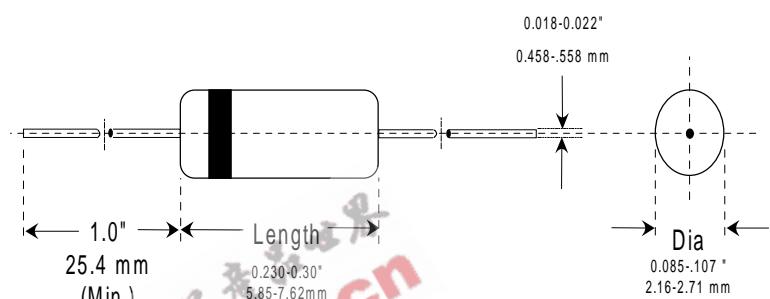

Absolute Maximum Ratings at $T_{amb} = 25^{\circ}\text{C}$

Parameter	Symbols	Min.	Max.	Units
Peak Inverse Voltage	PIV	**	45	Volts
Peak Forward Surge Current Non-Repetitive, $t = 1$ Second	I_{FSM}		0.2	Amps
Peak Forward Surge Current Repetitive	I_{FSR}		50	mA
Average Rectified Forward Current	I_o		50	mA
Operating and Storage Temperatures	$T_{J \& STG}$	-55	+75	$^{\circ}\text{C}$

Electrical Characteristics at $T_{amb} = 25^{\circ}\text{C}$

Parameter	Test Conditions	Symbols	Min.	Typ.	Max.	Units
Forward Voltage Drop	$I_F = 5$ mA	V_F	**	1.0		Volts
Breakdown Voltage	$I_R = 1.0$ mA	PIV	45			Volts
Reverse Leakage	$V_R = 10$ Volts	I_R	**	65		μA
Dynamic Resistance Input cycles @40 MHz Modulated @ 400 Hz Input Voltage 1.6 VRMS Without modulation RC Filter Network R=4.7 K, C=5 pF		DR	1.55			Volts(p-p)