





Closed frame "solid" insulator withstands high mechanical impact. Low profile

Available with series 10 standard pins, other types on request

Insertion characteristics:
4-finger standard

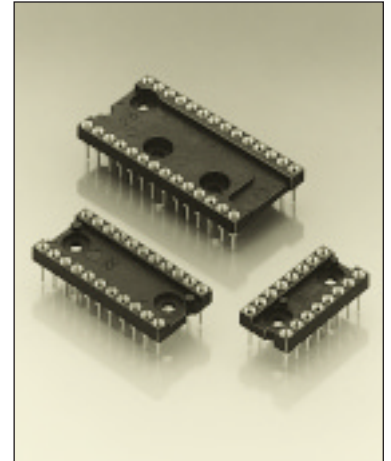

| Platings | Sleeve  | Clip  | Pin  |
|----------|--|--|---|
| 91 | 5 µm Sn Pb | 0.25 µm Au | |
| 93 | 5 µm Sn Pb | 0.75 µm Au | |
| 97 | 5 µm Sn Pb | Goldflash | |
| 99 | 5 µm Sn Pb | 5 µm Sn Pb | |

Ordering information

For complete part number see Order Codes list below

| No. of poles | Order Codes | | | | Insulator dimensions | Insulator dimensions | | |
|--------------|---------------------|---------------------|---------------------|---------------------|----------------------|----------------------|-------|-------|
| | Plating 91 B | Plating 93 B | Plating 97 B | Plating 99 B | | See page 51 | A | B |
| 6 | 210-91-306-41-001 | 210-93-306-41-001 | 210-97-306-41-001 | 210-99-306-41-001 | Fig. 30 | 7.6 | 7.62 | 10.1 |
| 8 | 210-91-308-41-001 | 210-93-308-41-001 | 210-97-308-41-001 | 210-99-308-41-001 | Fig. 31 | 10.1 | 7.62 | 10.1 |
| 10 | 210-91-310-41-001 | 210-93-310-41-001 | 210-97-310-41-001 | 210-99-310-41-001 | Fig. 32 | 12.6 | 7.62 | 10.1 |
| 14 | 210-91-314-41-001 | 210-93-314-41-001 | 210-97-314-41-001 | 210-99-314-41-001 | Fig. 33 | 17.7 | 7.62 | 10.1 |
| 16 | 210-91-316-41-001 | 210-93-316-41-001 | 210-97-316-41-001 | 210-99-316-41-001 | Fig. 34 | 20.3 | 7.62 | 10.1 |
| 18 | 210-91-318-41-001 | 210-93-318-41-001 | 210-97-318-41-001 | 210-99-318-41-001 | Fig. 35 | 22.8 | 7.62 | 10.1 |
| 20 | 210-91-320-41-001 | 210-93-320-41-001 | 210-97-320-41-001 | 210-99-320-41-001 | Fig. 36 | 25.3 | 7.62 | 10.1 |
| 24 | 210-91-324-41-001 | 210-93-324-41-001 | 210-97-324-41-001 | 210-99-324-41-001 | Fig. 37 | 30.4 | 7.62 | 10.1 |
| 22 | 210-91-422-41-001 | 210-93-422-41-001 | 210-97-422-41-001 | 210-99-422-41-001 | Fig. 38 | 27.8 | 10.16 | 12.6 |
| 24 | 210-91-424-41-001 | 210-93-424-41-001 | 210-97-424-41-001 | 210-99-424-41-001 | Fig. 39 | 30.4 | 10.16 | 12.6 |
| 24 | 210-91-624-41-001 | 210-93-624-41-001 | 210-97-624-41-001 | 210-99-624-41-001 | Fig. 40 | 30.4 | 15.24 | 17.7 |
| 28 | 210-91-628-41-001 | 210-93-628-41-001 | 210-97-628-41-001 | 210-99-628-41-001 | Fig. 41 | 35.5 | 15.24 | 17.7 |
| 32 | 210-91-632-41-001 | 210-93-632-41-001 | 210-97-632-41-001 | 210-99-632-41-001 | Fig. 42 | 40.6 | 15.24 | 17.7 |
| 36 | 210-91-636-41-001 | 210-93-636-41-001 | 210-97-636-41-001 | 210-99-636-41-001 | Fig. 43 | 45.7 | 15.24 | 17.7 |
| 40 | 210-91-640-41-001 | 210-93-640-41-001 | 210-97-640-41-001 | 210-99-640-41-001 | Fig. 44 | 50.6 | 15.24 | 17.7 |
| 48 | 210-91-648-41-001 | 210-93-648-41-001 | 210-97-648-41-001 | 210-99-648-41-001 | Fig. 45 | 61.0 | 15.24 | 17.64 |