

## 5x25mm/ No. 240



### Indicator, 250V

**Time-Current Characteristic**  
Quick Acting (F)

**Standard**  
None

**Approvals**  
None

### Specifications

**Packaging**

002: Pack (100 pcs.)

**Materials**

Tube: Ceramic  
End Caps: Nickel-plated brass

**Operating Temperature**

-25°C to +70°C (consider de-rating)

**Climatic Category**

-25°C/+70°C/21 days (EN 60068-1..3)

**Stock Conditions**

+10°C to +60°C  
relative humidity ≤ 75% yearly average,  
without dew


**Vibration Resistance**

24 cycles at 15 min. each (EN 60068-2-6)  
10 - 60Hz at 0.75mm amplitude  
60 - 2000Hz at 10g acceleration

**Marking**

Ⓜ, F, Current Rating, 250V

**Dimensions (mm)**

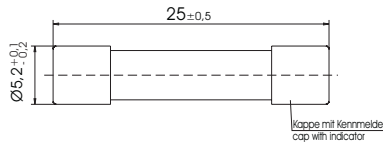

**Limits for Pre-arcing Time**

Rated Current	1.5 x I <sub>Rated</sub>	2.1 x I <sub>Rated</sub>	4 x I <sub>Rated</sub>	10 x I <sub>Rated</sub>
1.60A ... 6.3A	> 1h	< 30 min	< 300ms	< 20ms

**Permissible continuous operating current is 100 % at ambient temperature of 23°C (73.4°F).**

Rated Current	Amp Code	Voltage Rating	Breaking Capacity	Voltage Drop 1.0 x I <sub>Rated</sub> max. (mV) Ⓜ	Power Dissipation 1.5 x I <sub>Rated</sub> max. (W) Ⓜ	Melting Integral 10 x I <sub>Rated</sub> max. (A²s) Ⓜ	color of indicator
1.6A	1160	250V <sup>1</sup>	1500A @ 250 V AC 50Hz cos φ = 0.7	640	on request	1.3	orange
2.0A	1200	250V <sup>1</sup>		420		2.5	blue
2.5A	1250	250V <sup>1</sup>		320		5.8	yellow
4.0A	1400	250V <sup>1</sup>		200		21.0	brown
6.3A	1630	250V <sup>1</sup>		170		78.0	green


<sup>1</sup> Operating Voltage ≥ 10 V

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

**Order Information**

Qty.	Order-Number	Series	Amp Code	Packaging
		240		

## 5x25mm/ No. 240

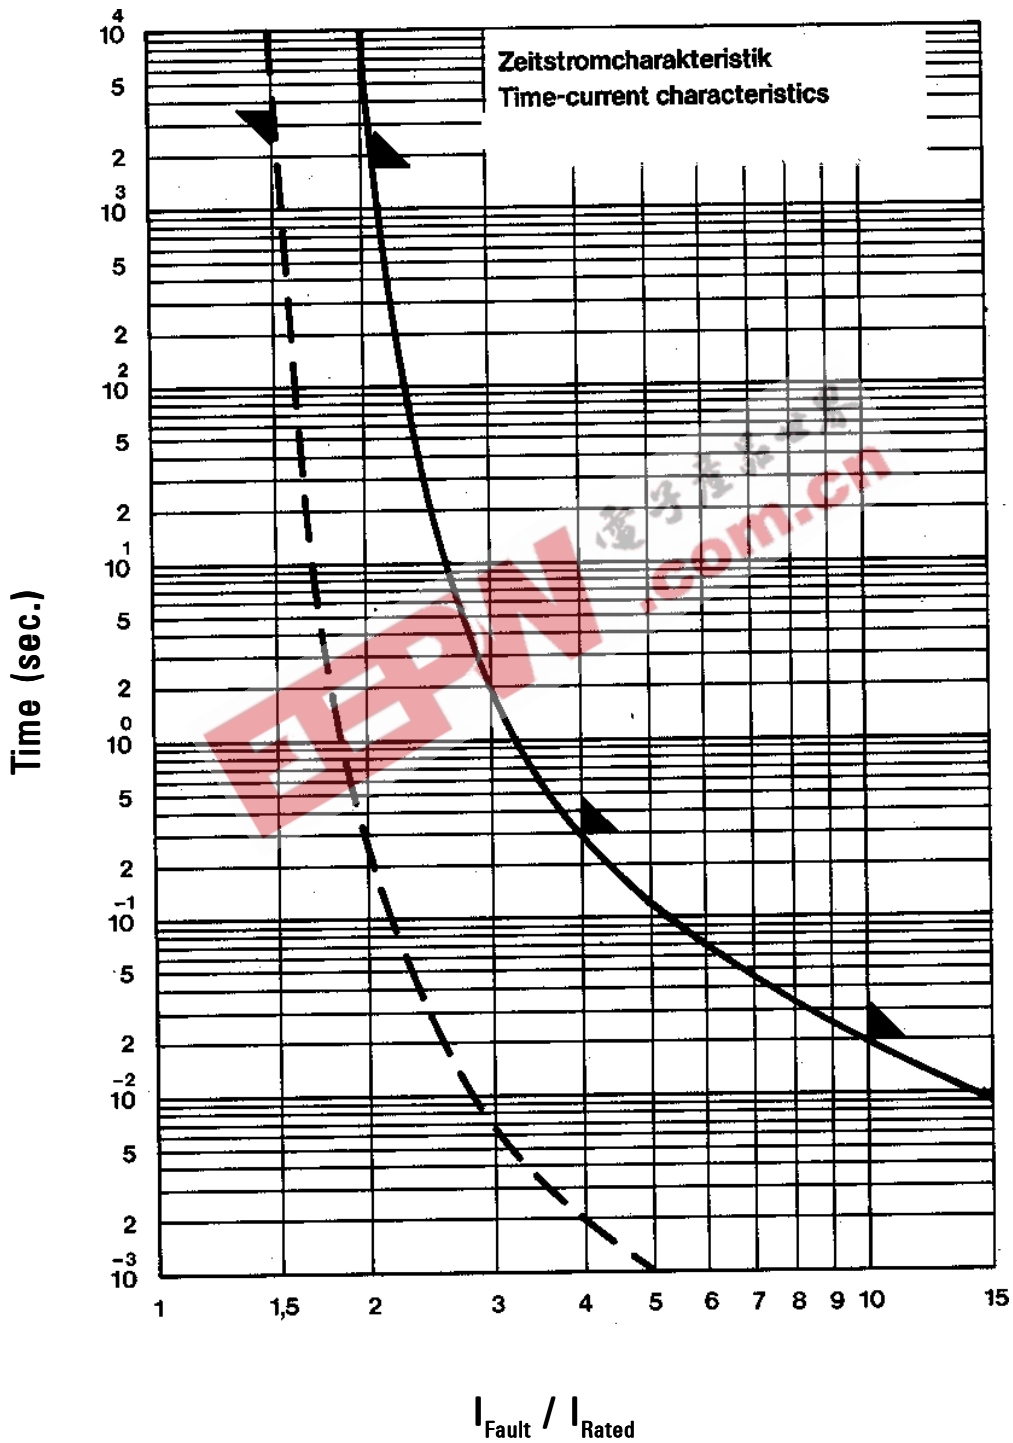

Contact Littelfuse for individual I-t curves