


WORLDWIDE



2110A, 2111A, 2112A, 2113A and 2195A Series Non-Relampable Neon Incandescent Indicator Lights

2110A, 2111A, 2112A, 2113A and 2195A Series Non-Relampable Neon-Incandescent Indicator Lights

DESCRIPTION AND FEATURES

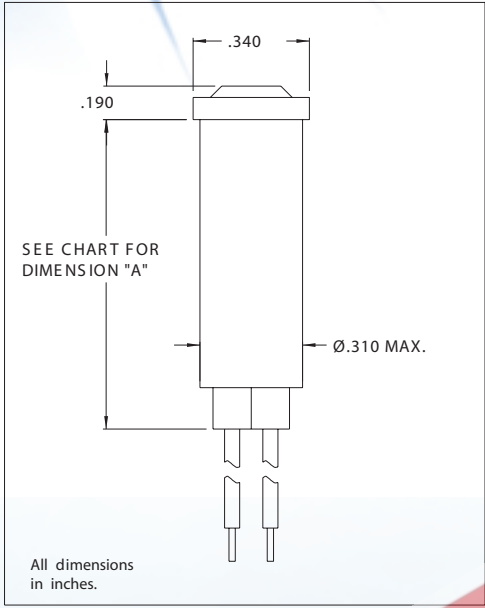

Mounting: Ø.310 MIN., supplied with push-on speednut SN1287.
 Wire Leads: No.22 AWG (105°C) 4.40/4.80 long, stripped .430/.570
 Lens: Polycarbonate-neon transparent, incandescent-translucent
 Bezel: White nylon. For black finish add "X" after the series letter(s).
 Housing: White Nylon



Lens Color	Neon		Incandescent	
	Model No. (105-125VAC)	Model No. (208-250VAC)	Model No. (12V)	Model No. (28V)
Red	2110A1	2111A1	2195A1-12V	2195A1-28V
Clear	2110A2	2111A2	-	-
Amber	2110A3	2111A3	2195A3-12V	2195A3-28V
White	2110A4	2111A4	2195A4-12V	2195A4-28V
Green	2112A5*	2113A5*	2195A5-12V	2195A5-28V
Blue	2112A6**	2113A6**	-	-
Lamp used	C2A+R resistor	C2A+R resistor	#2162	#2187
Lead Color	Black	Black/Red	Yellow	Purple
"A" DIM	1.480	1.480	.740	.740

* Incorporates G2B lamp and resistor.
 ** Incorporates T2B lamp and resistor.
 Underwriters Laboratories (UL) File No. E20325
 Canadian Standards Association (CSA) File No. LR13346



America:
 CML Innovative Technologies, Inc.
 147 Central Avenue
 Hackensack, NJ 07601 -USA
 Tel: 1-201-489-8989
 Fax: 1-201-489-6911
 e-mail: americas@cml-it.com

Europe:
 CML Technologies GmbH & Co. KG
 Robert-Bunsen-Str. 1
 67098 Bad Dürkheim - GERMANY
 Tel: +49 (0)6322 9567-0
 Fax: +49 (0)6322 9567-88
 e-mail: europe@cml-it.com

Asia:
 CML Innovative Technologies, Inc.
 61 Aida Street
 Singapore 459975
 Tel: (65)9630-5003
 e-mail: asia@cml-it.com