


NTC Thermistors, Glass Encapsulated Miniature Bead

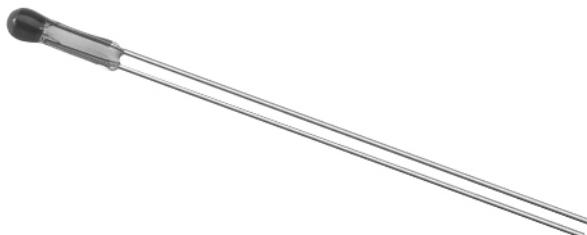

QUICK REFERENCE DATA

| PARAMETER | VALUE |
|---|-------------------------------------|
| Resistance value at 25 °C | 1 kΩ to 1 MΩ |
| Tolerance on R ₂₅ -value | ±5%; ±10% |
| B25/85-value | 2075 to 4100 K |
| Tolerance on B25/85-value | ±5% |
| Maximum dissipation at 55 °C | 100 mW |
| Dissipation factor | ≈0.8 mW/K |
| Response time; note 1 | ≈1 s |
| Thermal time constant | ≈7.5 s |
| Operating temperature range: | |
| at zero dissipation | –55 to +200 °C or –55 to +300 °C |
| at maximum dissipation | 0 to 55 °C |
| Dielectric withstand voltage (RMS) between terminals and glass envelope | min. 100 V |
| Insulation resistance between terminals and glass envelope at 10 V (DC) | min. 10 MΩ |
| Mass | ≈33 mg |

Note

1. Response time in silicone oil MS200/50. This is the time needed for the sensor to reach 63.2% of the total temperature difference when subjected to a temperature change from 25 °C in air to 85 °C in oil.

ELECTRICAL DATA AND ORDERING INFORMATION

| R ₂₅ (kΩ) | B _{25/85} -VALUE | T _{max} (°C) | TC (%/K) | CATALOG NUMBER 2322 626 2.... | |
|-------------------------|---------------------------|--------------------------|-------------|-------------------------------|----------------------|
| | | | | R ₂₅ ±5% | R ₂₅ ±10% |
| 1 | 2075 K ±5% | 200 | –2.3 | 3102 | 2102 |
| 2.2 | 2285 K ±5% | 200 | –2.6 | 3222 | 2222 |
| 4.7 | 2485 K ±5% | 200 | –2.8 | 3472 | 2472 |
| 10 | 3750 K ±5% | 200 | –4.2 | 3103 | 2103 |
| 22 | 3560 K ±5% | 200 | –4.0 | 3223 | 2223 |
| 47 | 3750 K ±5% | 200 | –4.2 | 3473 | 2473 |
| 100 | 3900 K ±5% | 300 | –4.4 | 3104 | 2104 |
| 220 | 3860 K ±5% | 300 | –4.3 | 3224 | 2224 |
| 470 | 3950 K ±5% | 300 | –4.5 | 3474 | 2474 |
| 1000 | 4100 K ±5% | 300 | –4.6 | 3105 | 2105 |

Note

1. R₂₅-values, temperature coefficients and catalog numbers.
2. The thermistors have a 12-digit catalog number starting with 2322 626 2. The subsequent 4 digits indicate the resistance value and tolerance.

2322 626 2....


Vishay BCc

NTC Thermistors, Glass Encapsulated
Miniature Bead




DIMENSIONS in millimeters

Component outline.

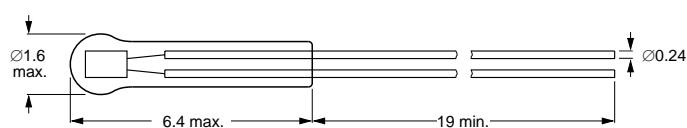

DERATING

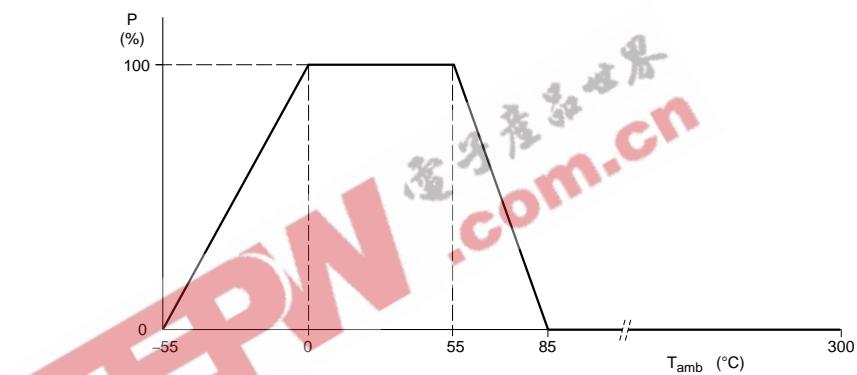

Power derating curve.