


# 240 Amp Schottky Rectifier HS24135 – HS24145

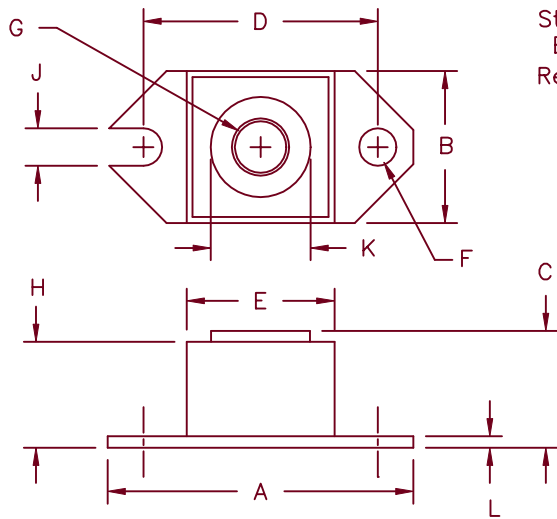

Std. Polarity  
Base is Cathode  
Rev. Polarity  
Base is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	Sq. Dia.
F	.152	.160	3.86	4.06	
G		1/4–20	UNC–2B		
H	.570	.580	14.49	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	Dia.
L	.120	.130	3.05	3.30	

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS24135*	241NQ035	35V	35V
HS24140*	241NQ040	40V	40V
HS24145*	241NQ045	45V	45V

\*Add suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard ring protection
- 240 Amperes/ 45 Volts
- 175°C junction temperature
- Reverse energy tested

## Electrical Characteristics

Average forward current	$I_F(AV)$ 240 Amps	$T_C = 133^\circ C$ , square wave, $R_{\theta JC} = 0.24^\circ C/W$
Maximum surge current	$I_{FSM}$ 3400 Amp	8.3 ms, half sine $T_J = 175^\circ C$
Max repetitive peak reverse current	$I_R(OV)$ 2 Amps	$f = 1$ KHz, $25^\circ C$ , 1 $\mu$ sec square wave
Max peak forward voltage	$V_{FM}$ 0.60 Volts	$I_{FM} = 240A: T_J = 175^\circ C^*$
Max peak forward voltage	$V_{FM}$ 0.69 Volts	$I_{FM} = 240A: T_J = 25^\circ C^*$
Max peak reverse current	$I_{RM}$ 200mA	$V_{RRM}, T_J = 125^\circ C^*$
Max peak reverse current	$I_{RM}$ 10 mA	$V_{RRM}, T_J = 25^\circ C$
Typical junction capacitance	$C_J$ 9500 pF	$V_R = 5.0V, T_J = 25^\circ C$

\*Pulse test: Pulse width 300  $\mu$ sec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	$-55^\circ C$ to $175^\circ C$
Operating junction temp range	$T_J$	$-55^\circ C$ to $175^\circ C$
Maximum thermal resistance	$R_{\theta JC}$	$0.24^\circ C/W$ Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.12^\circ C/W$ Case to sink
Terminal torque		35–40 inch pounds
Mounting Base torque		20–25 inch pounds
Weight		1.1 ounces (32 grams)

# HS24135 — HS24145

Figure 1  
Typical Forward Characteristics

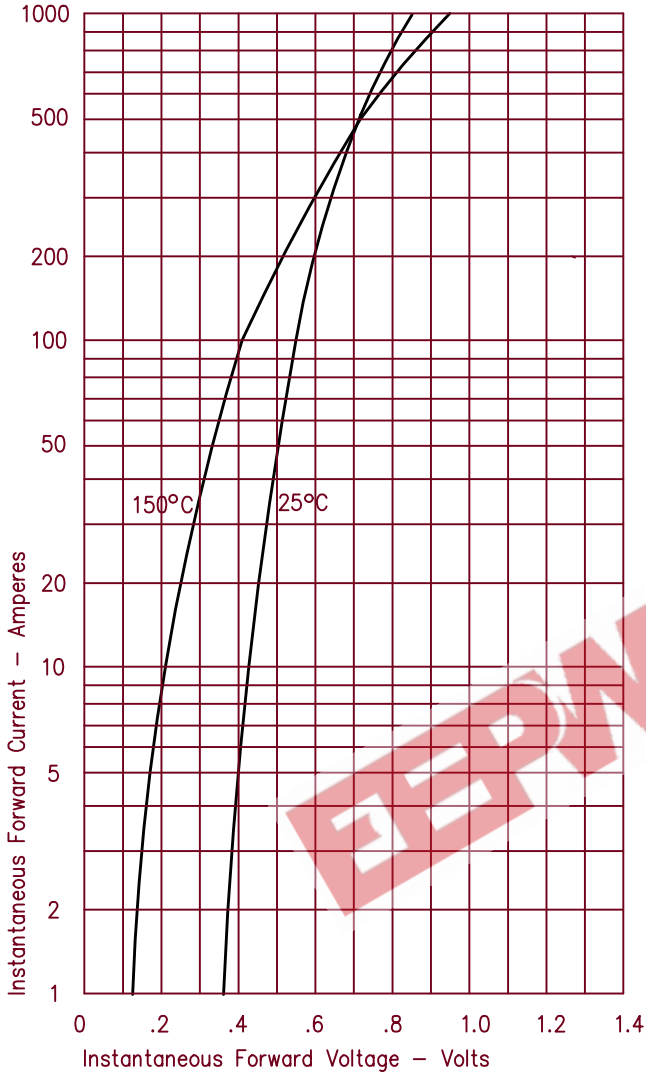


Figure 3  
Typical Junction Capacitance

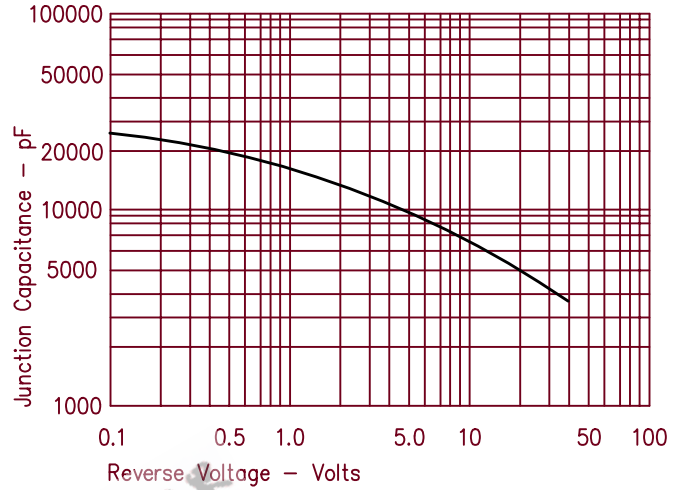


Figure 4  
Forward Current Derating

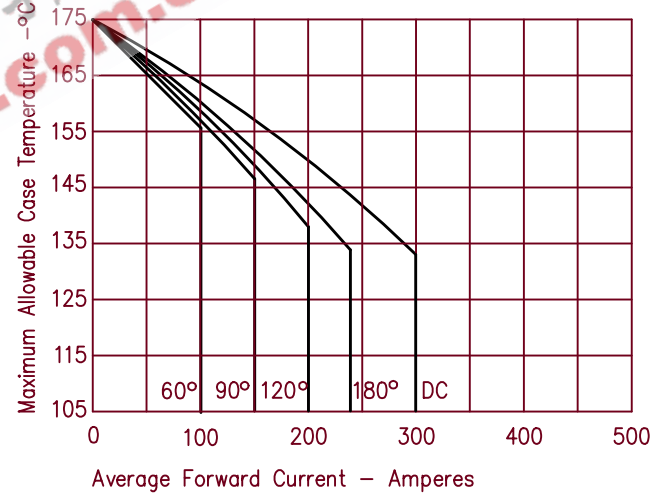


Figure 2  
Typical Reverse Characteristics

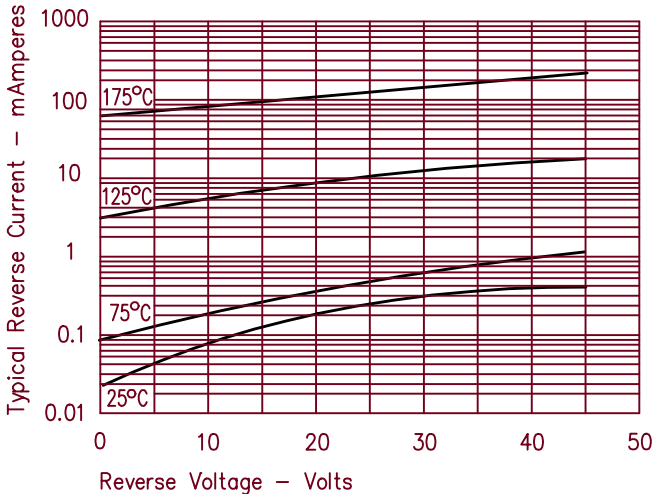


Figure 5  
Maximum Forward Power Dissipation

