



Certificate Number: Q10561

Certificate Number: E17276

## 2W005 - 2W10

PRV : 50 - 1000 Volts

Io : 2.0 Amperes


### FEATURES :

- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board

### MECHANICAL DATA :

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 1.29 grams

## SILICON BRIDGE RECTIFIERS

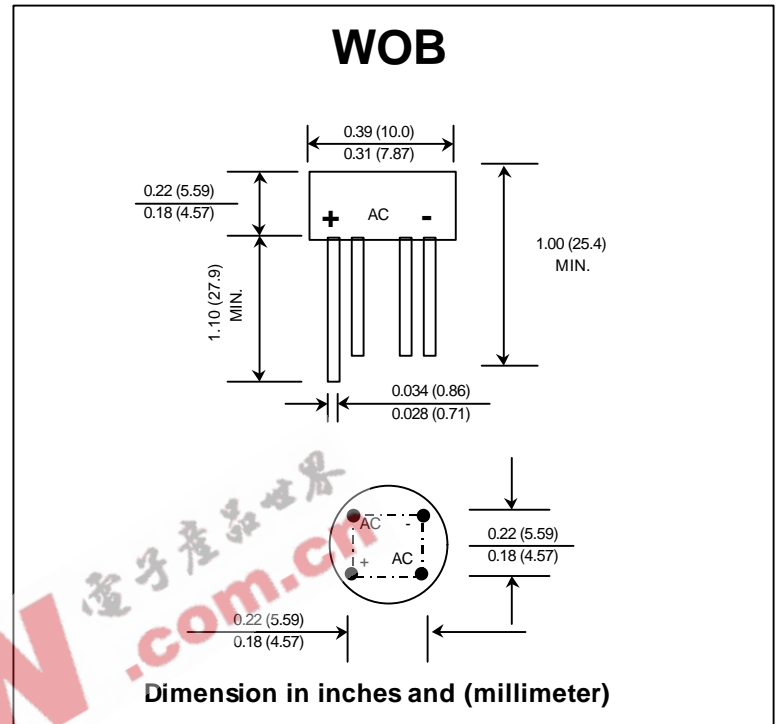

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	2W005	2W01	2W02	2W04	2W06	2W08	2W10	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Current 0.375" (9.5 mm) lead length $T_c = 25^\circ C$	$I_{F(AV)}$	2.0							Amps.
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	50							Amps.
Rating for fusing ( $t < 8.3$ ms.)	$I^2 t$	10							A <sup>2</sup> S
Maximum Forward Voltage per Diode at $I_F = 1.0$ Amp.	$V_F$	1.0							Volts
Maximum DC Reverse Current $T_a = 25^\circ C$	$I_R$	10							$\mu A$
at Rated DC Blocking Voltage $T_a = 100^\circ C$	$I_{R(H)}$	1.0							mA
Typical Junction Capacitance per Diode (Note 1)	$C_J$	24							pf
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	36							$^\circ C/W$
Operating Junction Temperature Range	$T_J$	- 50 to + 150							$^\circ C$
Storage Temperature Range	$T_{STG}$	- 50 to + 150							$^\circ C$

### Notes :


1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board with 0.22" x 0.22" (5.5 x 5.5 mm) copper Pads.


UPDATE : APRIL 23,1998

## RATING AND CHARACTERISTIC CURVES ( 2W005 - 2W10 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

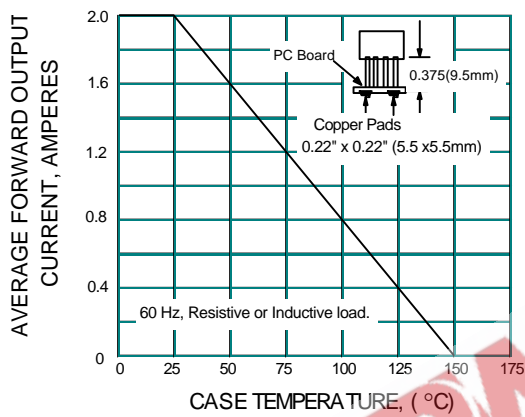

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

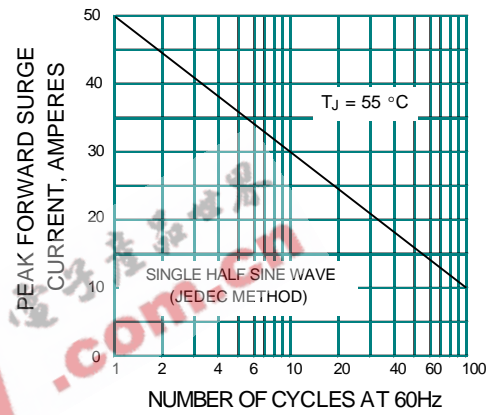

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

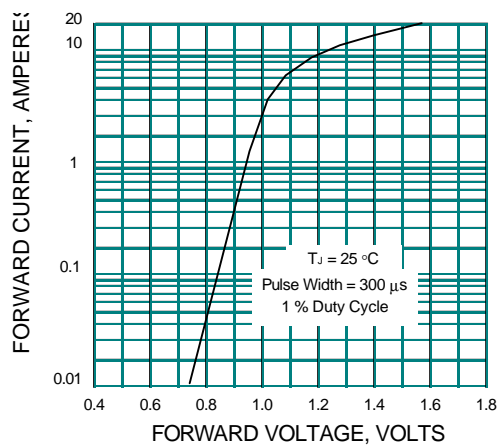

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

