

## 14 BIT DUAL SUPPLY BUS TRANSCEIVER LEVEL TRANSLATOR, A SIDE SERIES RESISTOR, 2 BIT I<sup>2</sup>C LINES

### PRELIMINARY DATA

- HIGH SPEED:  $t_{PD} = 4.4\text{ns}$  (MAX.) at  $T_A=85^\circ\text{C}$   
 $V_{CCA} = 3.0\text{V}$   $V_{CCB} = 2.3\text{V}$
- LOW POWER DISSIPATION:  
 $I_{CCA} = I_{CCB} = 20\mu\text{A}$ (MAX.) at  $T_A=85^\circ\text{C}$
- SYMMETRICAL OUTPUT IMPEDANCE:  
 $|I_{OHAL}| = |I_{OLB}| = 8\text{mA}$  MIN at  
 $V_{CCA} = 3.0\text{V}$   $V_{CCB} = 1.65\text{V}$  or  $2.3\text{V}$   
 $|I_{OHBL}| = |I_{OLB}| = 6\text{mA}$  MIN at  
 $V_{CCB} = 1.65\text{V}$   $V_{CCA} = 3\text{V}$ )
- BALANCED PROPAG. DELAYS:  $t_{PLH} \approx t_{PHL}$
- POWER DOWN PROTECTION ON I/O
- 26Ω SERIES RESISTOR ON A SIDE OUTPUTS
- OPERATING VOLTAGE RANGE:  
 $V_{CCA}(\text{OPR})=2.3\text{V}$  to  $3.6\text{V}$  (1.2V Data Retent)  
 $V_{CCB}(\text{OPR})=1.65\text{V}$  to  $2.7\text{V}$  (1.2V Data Retent)
- FAST I<sup>2</sup>C LINES 1.8V/2.8V LEVEL  
TRANSLATOR: 400KHz GUARANTEED  
DATA RATE AT  $C_L = 15\text{pF}$
- BUS HOLD PROVIDED ON DATA INPUT  
BOTH SIDE
- LATCH-UP PERFORMANCE EXCEEDS  
500mA (JESD 17)
- ESD PERFORMANCE:  
HBM > 2000V (MIL STD 883 method 3015);  
MM > 200V

### DESCRIPTION

The ST16C32245 is a dual supply low voltage CMOS 14-BIT BUS TRANSCEIVER fabricated with sub-micron silicon gate and five-layer metal wiring C<sup>2</sup>MOS technology. Designed for use as an interface between a 3.3V bus and a 2.5V or 1.8V bus in a mixed 3.3V/1.8V, 3.3V/2.5V and 2.5V/1.8V supply systems, it achieves high speed operation while maintaining the CMOS low power dissipation and it includes 2-bit I<sup>2</sup>C level translation. This IC is intended for two-way asynchronous communication between data buses and the direction of data transmission is determined by nDIR inputs. The enable inputs nG can be used to disable the device so that the buses are effectively isolated. The A-port interfaces with the 3V bus, the B-port with the 2.5V and 1.8V bus. All inputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage. All floating bus terminals during High Z State don't need external pull-up or pull-down resistor.

October 2004

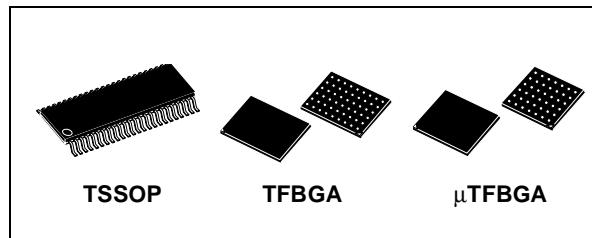


Table 1: Order Codes


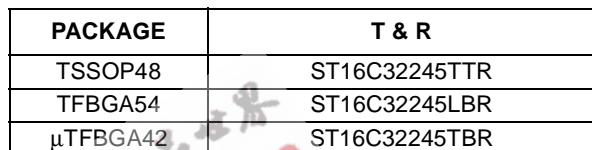


Figure 1: Logic Diagram

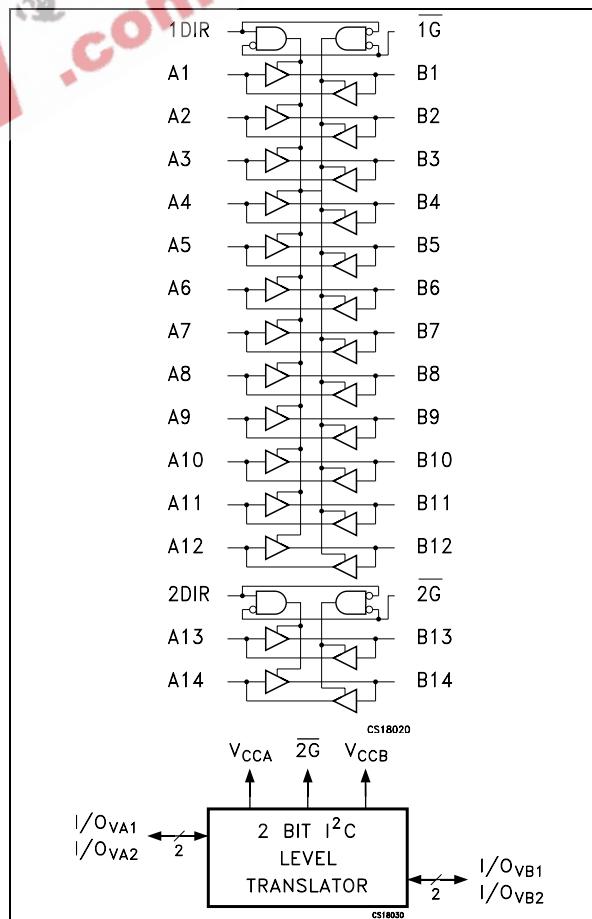

Rev. 1

1/20

Figure 2: Input And Output Equivalent Circuit

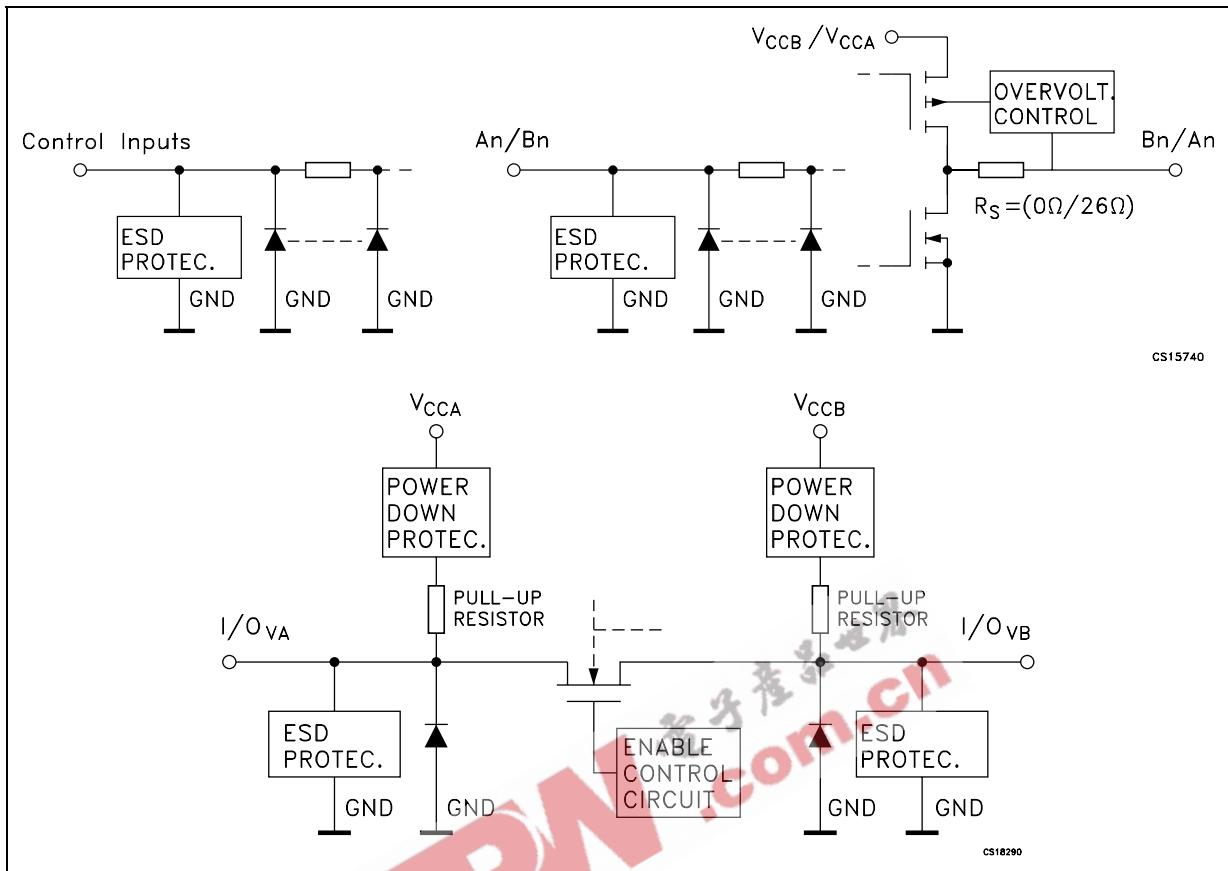
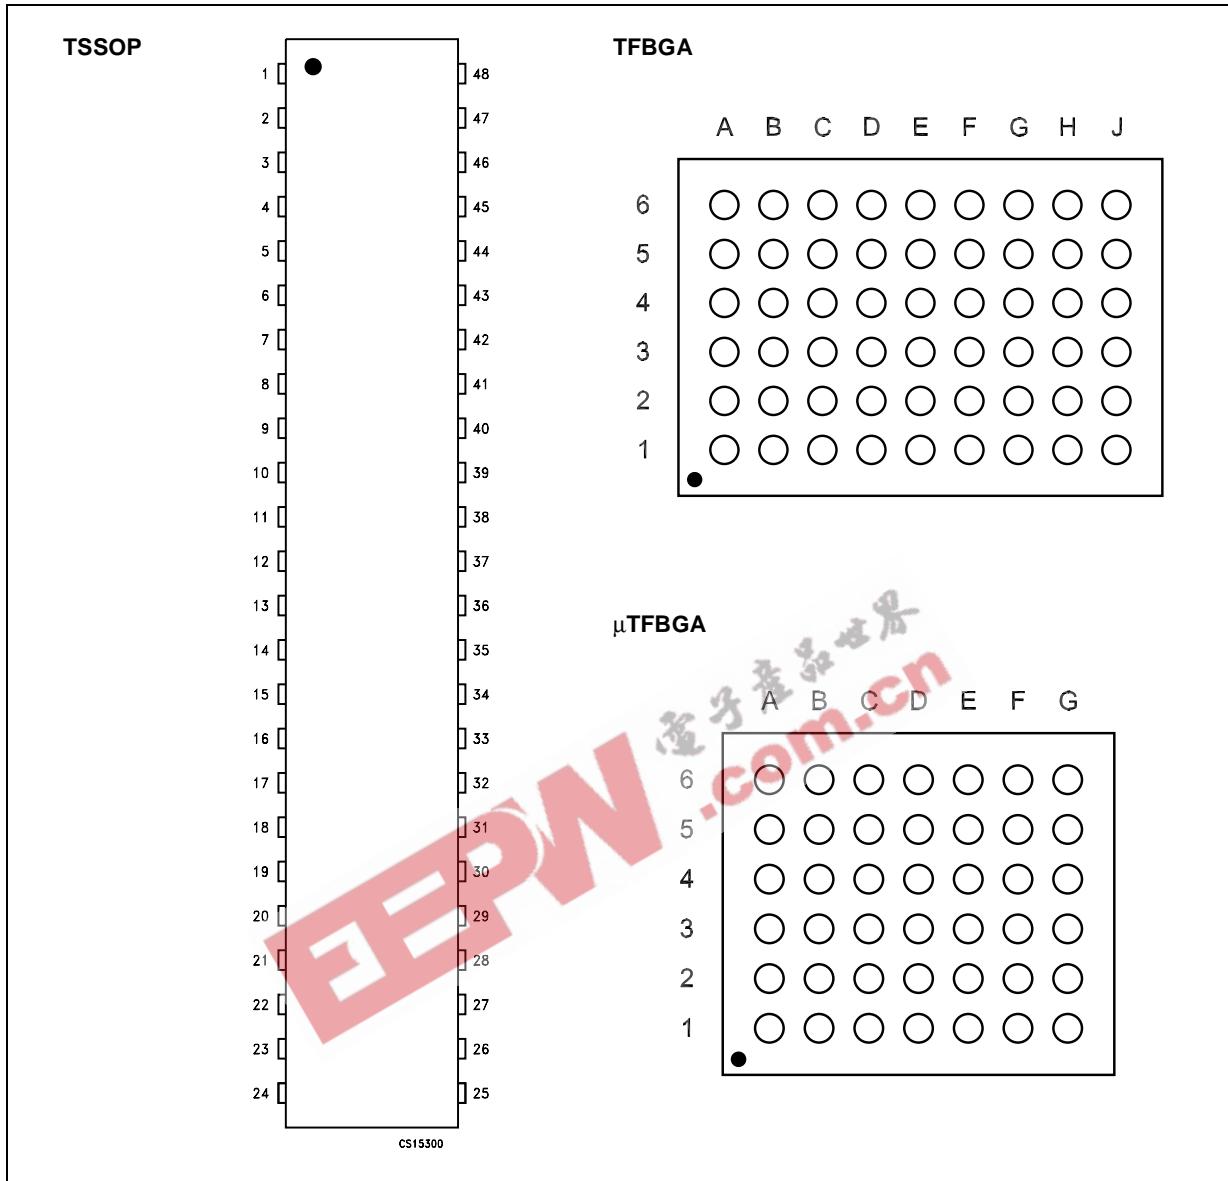


Table 2: Pin Description

TFBGA PIN N°	μTFBGA42 PIN N°	TSSOP PIN N°	SYMBOL	NAME AND FUNCTION
A3	B3	1	1DIR	Directional Controls
J3	F3	24	2DIR	Directional Controls
A6, B5, B6, C5, C6, D5, D6, E5	A4, A5, A6, B5, B6, C5, C6, D5	47, 46, 44, 43, 41, 40, 38, 37	1A1, 1A2, 1A3, 1A4, 1A5, 1A6, 1A7, 1A8	Data Inputs/Outputs
E6, F5, F6, G5, G6, H5	D6, E5, E6, F5, F6, G6	36, 35, 33, 32, 30, 29	1A9, 1A10, 1A11, 1A12, 2A13, 2A14	Data Inputs/Outputs
A1, B2, B1, C2, C1, D2, D1, E2	A3, A2, A1, B2, B1, C2, C1, D2	2, 3, 5, 6, 8, 9, 11, 12	1B1, 1B2, 1B3, 1B4, 1B5, 1B6, 1B7, 1B8	Data Inputs/Outputs
E1, F2, F1, G2, G1, H2	D1, E2, E1, F2, F1, G1	13, 14, 16, 17, 19, 20	1B9, 1B10, 1B11, 1B12, 2B13, 2B14	Data Inputs/Outputs
J4	F4	25	2G	Output Enable Inputs
A4	B4	48	1G	Output Enable Inputs
D3, D4, E3, E4, F3, F4	C3, C4, E3, E4	4, 10, 15, 21, 28, 34, 39, 45	GND	Ground (0V)
A2, A5, B3, B4, H3, H4, J2, J5	-	-	NC	No Connected
C4, G4	D4	42, 31	V <sub>CCA</sub>	Positive Supply Voltage
C3, G3	D3	7, 18	V <sub>CCB</sub>	Positive Supply Voltage
H6, J6	G5, G4	27, 26	I/O <sub>VA1</sub> , I/O <sub>VA2</sub>	I <sup>2</sup> C Line (V <sub>CCA</sub> Referred)
H1, J1	G2, G3	22, 23	I/O <sub>VB1</sub> , I/O <sub>VB2</sub>	I <sup>2</sup> C Line (V <sub>CCB</sub> Referred)

**Figure 3: Pin Connection** (top view for TSSOP, top through view for BGA)**Table 3: Truth Table**

INPUTS		FUNCTION		OUTPUT
$\bar{G}$	DIR	A BUS	B BUS	
L	L	OUTPUT	INPUT	$A = B$
L	H	INPUT	OUTPUT	$B = A$
H	X	Z	Z	Z

X=Don't care; Z=High Impedance

**Table 4: I<sup>2</sup>C Bus Function Table**

<b>2G</b>	<b>1G, 1DIR, 2DIR</b>	<b>I/O INPUT</b>		<b>FUNCTION</b>
		<b>I/O<sub>VA</sub></b>	<b>I/O<sub>VB</sub></b>	
H	X	Z	Z	I <sup>2</sup> C Disabled
L	X	L	L	I <sup>2</sup> C Comm.
L	X	V <sub>CCA</sub>	V <sub>CCB</sub>	I <sup>2</sup> C Comm.
L	X	Open	V <sub>CCB</sub>	I <sup>2</sup> C Comm.
L	X	V <sub>CCA</sub>	Open	I <sup>2</sup> C Comm.

Open: If I/O<sub>VA</sub> is not driven then the I/O<sub>VB</sub> will go in high level V<sub>CCB</sub> by embedded 10kΩ pull-up resistor; If I/O<sub>VB</sub> is not driven then the I/O<sub>VA</sub> will go in high level V<sub>CCA</sub> by embedded 10kΩ pull-up resistor.

**Table 5: Absolute Maximum Ratings**

<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Unit</b>
V <sub>CCA</sub>	Supply Voltage	-0.5 to +4.6	V
V <sub>CCB</sub>	Supply Voltage	-0.5 to +4.6	V
V <sub>I</sub>	DC Input Voltage	-0.5 to +4.6	V
V <sub>I/OA</sub>	DC I/O Voltage (Output disabled)	-0.5 to +4.6	V
V <sub>I/OB</sub>	DC I/O Voltage (Output disabled)	-0.5 to +4.6	V
V <sub>I/OA</sub>	DC I/O Voltage	-0.5 to V <sub>CCA</sub> + 0.5	V
V <sub>I/OB</sub>	DC I/O Voltage	-0.5 to V <sub>CCB</sub> + 0.5	V
V <sub>I/OVA</sub>	Level Input Voltage (I/O <sub>VA</sub> )	-0.5 to V <sub>CCA</sub> + 0.5	V
V <sub>I/OVB</sub>	Level Input Voltage (I/O <sub>VB</sub> )	-0.5 to V <sub>CCB</sub> + 0.5	V
I <sub>IK</sub>	DC Input Diode Current	-20	mA
I <sub>OK</sub>	DC Output Diode Current	-50	mA
I <sub>OA</sub>	DC Output Current	± 50	mA
I <sub>OB</sub>	DC Output Current	± 50	mA
I <sub>CCA</sub>	DC V <sub>CC</sub> or Ground Current	± 100	mA
I <sub>CCB</sub>	DC V <sub>CC</sub> or Ground Current	± 100	mA
P <sub>d</sub>	Power Dissipation	400	mW
T <sub>stg</sub>	Storage Temperature	-65 to +150	°C
T <sub>L</sub>	Lead Temperature (10 sec)	260	°C

Absolute Maximum Ratings are those value beyond which damage to the device may occur. Functional operation under these conditions is not implied

**Table 6: Recommended Operating Conditions**

Symbol	Parameter	Value	Unit
$V_{CCA}$	Supply Voltage	2.3 to 3.6	V
$V_{CCB}$	Supply Voltage	1.65 to 2.7	V
$V_I$	Input Voltage (Dir, G)	0 to $V_{CCB}$	V
$V_{I/OA}$	I/O Voltage	0 to $V_{CCA}$	V
$V_{I/OB}$	I/O Voltage	0 to $V_{CCB}$	V
$V_{I/OVA}$	Level Input Voltage (I/O <sub>VA</sub> )	0 to $V_{CCA}$	V
$V_{I/OVB}$	Level Input Voltage (I/O <sub>VB</sub> )	0 to $V_{CCB}$	V
$T_{op}$	Operating Temperature	-40 to 85	°C
$dt/dv$	Input Rise and Fall Time (note 1)	0 to 10	ns/V

1)  $V_I$  from 0.8V to 2.0V at  $V_{CC} = 3.0V$

EEBN 爱元件网 .com.cn

Table 7: DC Specification For V<sub>CCA</sub>

Symbol	Parameter	Test Condition			Value					Unit	
		V <sub>CCB</sub> (V)	V <sub>CCA</sub> (V)		T <sub>A</sub> = 25 °C			-40 to 85 °C			
					Min.	Typ.	Max.	Min.	Max.		
V <sub>IHA</sub>	High Level Input Voltage (An) (*)	1.8	2.5		1.6			1.6		V	
		1.8	3.3		2.0			2.0			
		2.5	3.3		2.0			2.0			
V <sub>ILA</sub>	Low Level Input Voltage (An) (*)	1.8	2.5				0.7		0.7	V	
		1.8	3.3				0.8		0.8		
		2.5	3.3				0.8		0.8		
V <sub>OHA</sub>	High Level Output Voltage	2.3	3.0	I <sub>O</sub> =-100µA	2.8			2.8		V	
		2.3	3.0	I <sub>O</sub> =-8mA	2.4			2.4			
		1.65	3.0	I <sub>O</sub> =-8mA	2.4			2.4			
		1.65	2.3	I <sub>O</sub> =-6mA	1.8			1.8			
V <sub>OLA</sub>	Low Level Output Voltage	2.3	3.0	I <sub>O</sub> =100µA			0.2		0.2	V	
		2.3	3.0	I <sub>O</sub> =8mA			0.55		0.55		
		1.65	3.0	I <sub>O</sub> =8mA			0.55		0.55		
		1.65	2.3	I <sub>O</sub> =6mA			0.40		0.40		
I <sub>IA</sub>	Input Leakage Current	2.7	3.6	V <sub>I</sub> = V <sub>CC</sub> or GND			± 0.5		± 5	µA	
I <sub>IA(HOLD)</sub>	Input Hold Current	1.65	2.3	V <sub>I</sub> = 0.7 V	45			45		µA	
		1.65	2.3	V <sub>I</sub> = 1.6 V	-45			-45			
		1.65	3.0	V <sub>I</sub> = 0.8 V	75			75			
		1.65	3.0	V <sub>I</sub> = 2.0 V	-75			-75			
		2.3	3.0	V <sub>I</sub> = 0.8 V	75			75			
		2.3	3.0	V <sub>I</sub> = 2.0 V	-75			-75			
		2.7	3.6	V <sub>I</sub> = 0 to 3.6 V					± 500		
I <sub>OZA</sub>	High Impedance Output Leakage Current	2.7	3.6	V <sub>IA</sub> = GND or 3.6V V <sub>IB</sub> = V <sub>IHB</sub> or V <sub>ILB</sub> G = V <sub>CCB</sub>			± 1.0		± 10	µA	
I <sub>OFF</sub>	Power Off Leakage Current	0	0	V <sub>IA</sub> = GND to 3.6V V <sub>IB</sub> = GND to 3.6V G, Dir = GND to 3.6V			± 1.0		± 10	µA	
I <sub>OFFI2C</sub>	Power Off I <sup>2</sup> C Line Leakage Current	1.65 to 2.7	0	I/O <sub>VA1,2</sub> = GND or V <sub>CCA</sub> ; I/O <sub>VB1,2</sub> = GND or V <sub>CCB</sub> ; 2G = V <sub>CCB</sub>			1.0		5	µA	
I <sub>CCtA</sub>	Quiescent Supply Current	1.95	3.6	V <sub>IA</sub> = V <sub>CCA</sub> or GND V <sub>IB</sub> = V <sub>CCB</sub> or GND I/O <sub>VA1,2</sub> = V <sub>CCA</sub> or Open; Dir, G = GND or V <sub>CCB</sub>			2		20	µA	
		1.95	2.7								
		2.7	3.6								
ΔI <sub>CCtA</sub>	Maximum Quiescent Supply Current / Input (An)	2.7	3.6	V <sub>IA</sub> = V <sub>CCA</sub> - 0.6V V <sub>IB</sub> = V <sub>CCB</sub> or GND					0.75	mA	
		1.95	3.6								
		1.95	2.7								

(\*): V<sub>CC</sub> range = 3.3±0.3; 2.5±0.2V and 2.8±0.1V; 1.8±0.15V

**Table 8: DC Specification For V<sub>CCB</sub>**

Symbol	Parameter	Test Condition			Value					Unit	
		V <sub>CCB</sub> (V)	V <sub>CCA</sub> (V)		T <sub>A</sub> = 25 °C			-40 to 85 °C			
					Min.	Typ.	Max.	Min.	Max.		
V <sub>IHB</sub>	High Level Input Voltage (Bn, Dir, G) (*)	1.8	2.5		0.65V <sub>CCB</sub>			0.65V <sub>CCB</sub>		V	
		1.8	3.3		0.65V <sub>CCB</sub>			0.65V <sub>CCB</sub>			
		2.5	3.3		1.6			1.6			
V <sub>ILB</sub>	Low Level Input Voltage (Bn, Dir, G) (*)	1.8	2.5				0.35V <sub>CCB</sub>		0.35V <sub>CCB</sub>	V	
		1.8	3.3				0.35V <sub>CCB</sub>		0.35V <sub>CCB</sub>		
		2.5	3.3				0.7		0.7		
V <sub>OHB</sub>	High Level Output Voltage	2.3	3.0	I <sub>O</sub> =-100µA	2.1			2.1		V	
		2.3	3.0	I <sub>O</sub> =-18mA	1.7			1.7			
		1.65	3.0	I <sub>O</sub> =-6mA	1.25			1.25			
		1.65	2.3	I <sub>O</sub> =-6mA	1.25			1.25			
V <sub>OLB</sub>	Low Level Output Voltage	2.3	3.0	I <sub>O</sub> =100µA			0.2		0.2	V	
		2.3	3.0	I <sub>O</sub> =18mA			0.60		0.60		
		1.65	3.0	I <sub>O</sub> =6mA			0.30		0.30		
		1.65	2.3	I <sub>O</sub> =6mA			0.30		0.30		
I <sub>IB</sub>	Input Leakage Current	2.7	3.6	V <sub>I</sub> = V <sub>CC</sub> or GND			± 0.5		± 5	µA	
I <sub>IB(HOLD)</sub>	Input Hold Current	1.65	2.3	V <sub>I</sub> = 0.57 V	25			25		µA	
		1.65	2.3	V <sub>I</sub> = 1.07 V	-25			-25			
		1.65	3.0	V <sub>I</sub> = 0.57 V	25			25			
		1.65	3.0	V <sub>I</sub> = 1.07 V	-25			-25			
		2.3	3.0	V <sub>I</sub> = 0.7 V	45			45			
		2.3	3.0	V <sub>I</sub> = 1.6 V	-45			-45			
		2.7	3.6	V <sub>I</sub> = 0 to 2.7 V					± 500		
I <sub>OZB</sub>	High Impedance Output Leakage Current	2.7	3.6	V <sub>IA</sub> = V <sub>IHA</sub> or V <sub>ILA</sub> V <sub>IB</sub> = GND or 2.7V G = V <sub>CCB</sub>			± 1.0		± 10	µA	
I <sub>CCtB</sub>	Quiescent Supply Current	1.95	3.6	V <sub>IA</sub> = V <sub>CCA</sub> or GND V <sub>IB</sub> = V <sub>CCB</sub> or GND Dir or G = V <sub>CCB</sub> or GND I/O <sub>VA1,2</sub> = V <sub>CCA</sub> or Open			2		20	µA	
		1.95	2.7								
		2.7	3.6								
ΔI <sub>CCtB</sub>	Maximum Quiescent Supply Current / Input (Bn, DIR, G)	2.7	3.6	V <sub>IB</sub> = V <sub>CCB</sub> - 0.6V V <sub>IA</sub> = V <sub>CCA</sub> or GND					0.75	mA	
		1.95	3.6								
		1.95	2.7								

(\*) V<sub>CC</sub> range = 3.3±0.3; 2.5±0.2V and 2.8±0.1V ; 1.8±0.15V

**Table 9: DC Specification I<sup>2</sup>C Lines**

Symbol	Parameter	Test Condition			Value					Unit	
		V <sub>CCB</sub> (V) (*)	V <sub>CCA</sub> (V)		T <sub>A</sub> = 25 °C			-40 to 85 °C			
					Min.	Typ.	Max.	Min.	Max.		
V <sub>IH2</sub>	High Level Input Voltage (I/O <sub>VB1</sub> , I/O <sub>VB2</sub> )	1.8	2.65 to 3.6		0.7xV <sub>CCB</sub>		V <sub>CCB</sub>	0.7xV <sub>CCB</sub>	V <sub>CCB</sub>	V	
		1.8	2.65 to 3.6		0.7xV <sub>CCB</sub>		V <sub>CCB</sub>	0.7xV <sub>CCB</sub>	V <sub>CCB</sub>		
	High Level Input Voltage (I/O <sub>VA1</sub> , I/O <sub>VA2</sub> )	1.8	2.65 to 3.6		0.7xV <sub>CCA</sub>		V <sub>CCA</sub>	0.7xV <sub>CCA</sub>	V <sub>CCA</sub>		
		1.8	2.65 to 3.6		0.7xV <sub>CCA</sub>		V <sub>CCA</sub>	0.7xV <sub>CCA</sub>	V <sub>CCA</sub>		
V <sub>IL2</sub>	Low Level Input Voltage (I/O <sub>VB1</sub> , I/O <sub>VB2</sub> )	1.8	2.65 to 3.6		0		0.25	0	0.25	V	
		1.8	2.65 to 3.6		0		0.25	0	0.25		
	Low Level Input Voltage (I/O <sub>VA1</sub> , I/O <sub>VA2</sub> )	1.8	2.65 to 3.6		0		0.25	0	0.25		
		1.8	2.65 to 3.6		0		0.25	0	0.25		
V <sub>OH2</sub>	High Level Output Voltage (I/O <sub>VB1</sub> , I/O <sub>VB2</sub> )	1.65	2.3	I <sub>OH</sub> = -20 μA; V <sub>I/OVA</sub> =V <sub>CCA</sub>	V <sub>CCB</sub> -0.4			V <sub>CCB</sub> -0.4		V	
	High Level Output Voltage (I/O <sub>VA1</sub> , I/O <sub>VA2</sub> )	1.65	2.3	I <sub>OH</sub> = -20 μA; V <sub>I/OVB</sub> =V <sub>CCB</sub>	V <sub>CCA</sub> -0.4			V <sub>CCA</sub> -0.4			
V <sub>OL2</sub>	Low Level Output Voltage (I/O <sub>VB1</sub> , I/O <sub>VB2</sub> ), (I/O <sub>VA1</sub> , I/O <sub>VA2</sub> )	1.65	2.3	I <sub>OL</sub> = 1 mA; V <sub>I/OVB</sub> or V <sub>I/OVA</sub> =GND			0.35		0.35	V	

(\*) V<sub>CC</sub> range = 1.8±0.15V**Table 10: Dynamic Switching Characteristics**

Symbol	Parameter	Test Condition			Value					Unit	
		V <sub>CCB</sub> (V)	V <sub>CCA</sub> (V)		T <sub>A</sub> = 25 °C			-40 to 85 °C			
					Min.	Typ.	Max.	Min.	Max.		
V <sub>OLPA</sub>	Dynamic Low Level Quiet An Output	1.8	2.5	C <sub>L</sub> =30pF V <sub>IL</sub> =0V V <sub>IH</sub> =V <sub>CC</sub>		0.25				V	
		1.8	3.3			0.35					
		2.5	3.3			0.35					
V <sub>OLPB</sub>	Dynamic Low Level Quiet Bn Output	1.8	2.5	C <sub>L</sub> =30pF V <sub>IL</sub> =0V V <sub>IH</sub> =V <sub>CC</sub>		0.25				V	
		1.8	3.3			0.25					
		2.5	3.3			0.6					
V <sub>OLVA</sub>	Dynamic Low Level Quiet An Output	1.8	2.5	C <sub>L</sub> =30pF V <sub>IL</sub> =0V V <sub>IH</sub> =V <sub>CC</sub>		-0.25				V	
		1.8	3.3			-0.35					
		2.5	3.3			-0.35					
V <sub>OLVB</sub>	Dynamic Low Level Quiet Bn Output	1.8	2.5	C <sub>L</sub> =30pF V <sub>IL</sub> =0V V <sub>IH</sub> =V <sub>CC</sub>		-0.25				V	
		1.8	3.3			-0.25					
		2.5	3.3			-0.6					
V <sub>OHVA</sub>	Dynamic High Level Quiet An Output	1.8	2.5	C <sub>L</sub> =30pF V <sub>IL</sub> =0V V <sub>IH</sub> =V <sub>CC</sub>		2.1				V	
		1.8	3.3			2.6					
		2.5	3.3			2.6					
V <sub>OHVB</sub>	Dynamic High Level Quiet Bn Output	1.8	2.5	C <sub>L</sub> =30pF V <sub>IL</sub> =0V V <sub>IH</sub> =V <sub>CC</sub>		1.7				V	
		1.8	3.3			1.7					
		2.5	3.3			2.0					

**Table 11: AC Electrical Characteristics**

Symbol	Parameter	Test Condition			Value		Unit	
		$V_{CCB}$ (V)	$V_{CCA}$ (V)		-40 to 85 °C			
					Min.	Max.		
$t_{PLH} t_{PHL}$	Propagation Delay Time An to Bn	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$	1.0	5.8	ns	
		1.8 ± 0.15	3.3 ± 0.3		1.0	6.2		
		2.5 ± 0.2	3.3 ± 0.3		1.0	4.4		
$t_{PLH} t_{PHL}$	Propagation Delay Time Bn to An (nota 3)	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$	1.0	5.5	ns	
		1.8 ± 0.15	3.3 ± 0.3		1.0	5.1		
		2.5 ± 0.2	3.3 ± 0.3		1.0	4.0		
$t_{PZL} t_{PZH}$	Output Enable Time G to An	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$	1.0	5.3	ns	
		1.8 ± 0.15	3.3 ± 0.3		1.0	5.1		
		2.5 ± 0.2	3.3 ± 0.3		1.0	4.0		
$t_{PZL} t_{PZH}$	Output Enable Time G to Bn	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$	1.0	8.3	ns	
		1.8 ± 0.15	3.3 ± 0.3		1.0	8.2		
		2.5 ± 0.2	3.3 ± 0.3		1.0	4.6		
$t_{PLZ} t_{PHZ}$	Output Disable Time G to An	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$	1.0	5.2	ns	
		1.8 ± 0.15	3.3 ± 0.3		1.0	5.6		
		2.5 ± 0.2	3.3 ± 0.3		1.0	4.8		
$t_{PLZ} t_{PHZ}$	Output Disable Time G to Bn	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$	1.0	4.6	ns	
		1.8 ± 0.15	3.3 ± 0.3		1.0	4.5		
		2.5 ± 0.2	3.3 ± 0.3		1.0	4.4		
$t_{OSLH}$ $t_{OSHL}$	Output To Output Skew Time (note1, 2)	1.8 ± 0.15	2.5 ± 0.2	$C_L = 30 \text{ pF}$ $R_L = 500 \Omega$		0.5	ns	
		1.8 ± 0.15	3.3 ± 0.3			0.5		
		2.5 ± 0.2	3.3 ± 0.3			0.75		

1) Skew is defined as the absolute value of the difference between the actual propagation delay for any two outputs of the same device switching in the same direction, either HIGH or LOW ( $t_{OSLH} = |t_{PLHm} - t_{PLHn}|$ ,  $t_{OSHL} = |t_{PHLm} - t_{PHLn}|$ )

2) Parameter guaranteed by design

3) To add 2.5ns at  $t_{PLH}$ ,  $t_{PHL}$  max propagation delay time Bn to An at  $V_{CCB}=1.8\pm 0.15\text{V}$ ;  $V_{CCA}=2.8\pm 0.1\text{V}$ ;  $R_L=500\Omega$ , when  $C_L=60\text{ pF}$


**Table 12: AC I<sup>2</sup>C Electrical Characteristics**

Symbol	Parameter	Test Condition			Value		Unit	
		V <sub>CCB</sub> (V)(*)	V <sub>CCA</sub> (V)(*)		-40 to 85 °C			
					Min.	Max.		
t <sub>rl/O</sub>	Rise Time I <sup>2</sup> C Input/Output Voltage (20% to 80%) (See fig. 3)	1.8 ± 0.15	2.5 ± 0.2	C <sub>L</sub> = 15 pF t <sub>rl/O</sub> = 15ns		250	ns	
		1.8 ± 0.15	3.3 ± 0.3					
		2.5 ± 0.2	3.3 ± 0.3					
t <sub>fl/O</sub>	Fall Time I <sup>2</sup> C Input/Output Voltage (80% to 20%) (See fig. 3)	1.8 ± 0.15	2.5 ± 0.2	C <sub>L</sub> = 15 pF t <sub>rl/O</sub> = 15ns		250	ns	
		1.8 ± 0.15	3.3 ± 0.3					
		2.5 ± 0.2	3.3 ± 0.3					
t <sub>PLH</sub>	Propagation Delay Time I <sup>2</sup> C I/O Voltage (20% to 80%) (Low to High) (fig. 3)	1.8 ± 0.15	2.5 ± 0.2	C <sub>L</sub> = 15 pF t <sub>rl/O</sub> = 15ns		100	ns	
		1.8 ± 0.15	3.3 ± 0.3					
		2.5 ± 0.2	3.3 ± 0.3					
t <sub>PHL</sub>	Propagation Delay Time I <sup>2</sup> C I/O Voltage (20% to 80%) High to Low (fig. 3)	1.8 ± 0.15	2.5 ± 0.2	C <sub>L</sub> = 15 pF t <sub>rl/O</sub> = 15ns		100	ns	
		1.8 ± 0.15	3.3 ± 0.3					
		2.5 ± 0.2	3.3 ± 0.3					
f <sub>I/OVA</sub> , f <sub>I/OVB</sub>	I <sup>2</sup> C lines data rate	1.8 ± 0.15	2.5 ± 0.2	C <sub>L</sub> = 15 pF t <sub>rl/O</sub> = 15ns		400	kHz	
		1.8 ± 0.15	3.3 ± 0.3					
		2.5 ± 0.2	3.3 ± 0.3					

(\*) V<sub>CC</sub> range = 3.3±0.3; 2.5±0.2V and 2.8±0.1V; 1.8±0.15V**Table 13: Capacitance Characteristics**

Symbol	Parameter	Test Condition			Value				Unit	
		V <sub>CCB</sub> (V)	V <sub>CCA</sub> (V)		T <sub>A</sub> = 25 °C		-40 to 85 °C			
					Min.	Typ.	Max.	Min.		
C <sub>INB</sub>	Input Capacitance	open	open			5			pF	
C <sub>I/O</sub>	Input/Output Capacitance	2.5	3.3			6			pF	
C <sub>PD</sub>	Power Dissipation Capacitance	2.5	3.3	f=10MHz		28			pF	
		1.8	3.3			28			pF	

1) C<sub>PD</sub> is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average current can be obtained by the following equation. I<sub>CC(opr)</sub> = C<sub>PD</sub> × V<sub>CC</sub> × f<sub>IN</sub> + I<sub>CC</sub>/14 (per circuit)

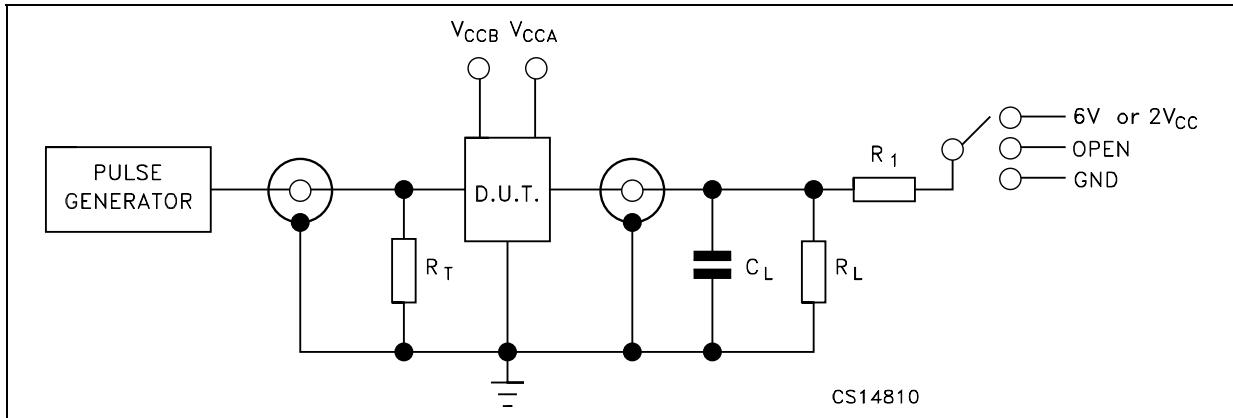**Figure 4: Test Circuit**

TEST	SWITCH
t <sub>PLH</sub> , t <sub>PHL</sub>	Open
t <sub>PZL</sub> , t <sub>PLZ</sub> (V <sub>CC</sub> = 3.0 to 3.6V)	6V
t <sub>PZL</sub> , t <sub>PLZ</sub> (V <sub>CC</sub> = 2.3 to 2.8V or V <sub>CC</sub> = 1.65 to 1.95V)	2V <sub>CC</sub>
t <sub>PZH</sub> , t <sub>PHZ</sub>	GND


C<sub>L</sub> = 30pF or equivalent (includes jig and probe capacitance)

R<sub>L</sub> = R<sub>1</sub> = 500Ω or equivalent


R<sub>T</sub> = Z<sub>OUT</sub> of pulse generator (typically 50Ω)

**Table 14: Waveform Symbol Value**


Symbol	V <sub>CC</sub>		
	3.0 to 3.6V	2.3 to 2.8V	1.65 to 1.95V
V <sub>IH</sub>	V <sub>CC</sub>	V <sub>CC</sub>	V <sub>CC</sub>
V <sub>M</sub>	1.5V	V <sub>CC</sub> /2	V <sub>CC</sub> /2
V <sub>X</sub>	V <sub>OL</sub> + 0.3V	V <sub>OL</sub> + 0.15V	V <sub>OL</sub> + 0.15V
V <sub>Y</sub>	V <sub>OL</sub> - 0.3V	V <sub>OL</sub> - 0.15V	V <sub>OL</sub> - 0.15V

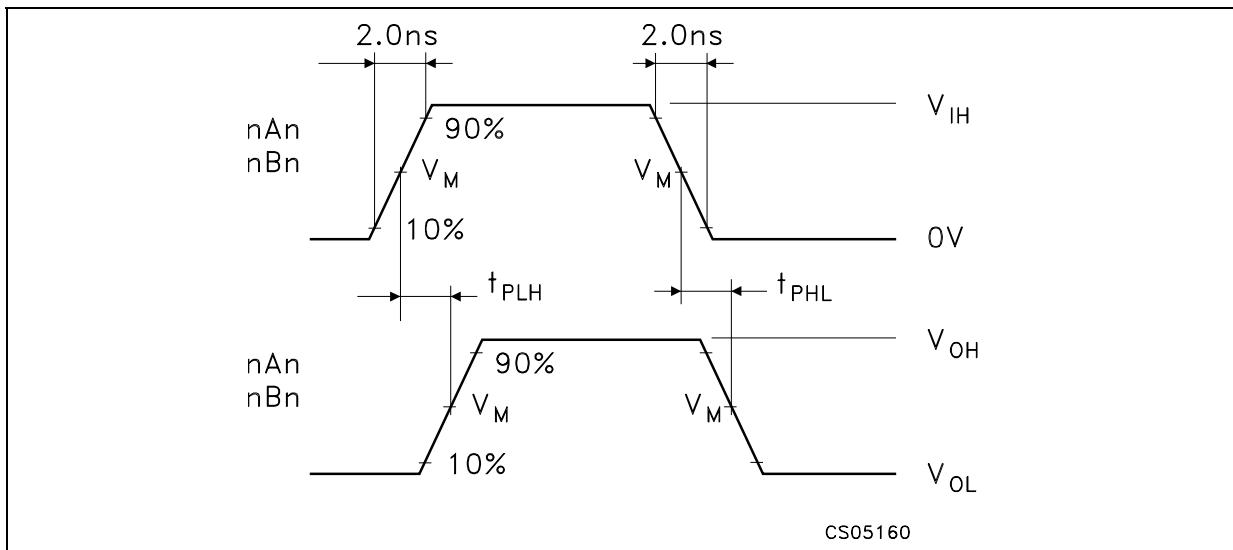**Figure 5: Waveform - Propagation Delay (f=1MHz; 50% duty cycle)**

**Figure 6: Waveform - Output Enable And Disable Time (f=1MHz; 50% duty cycle)**

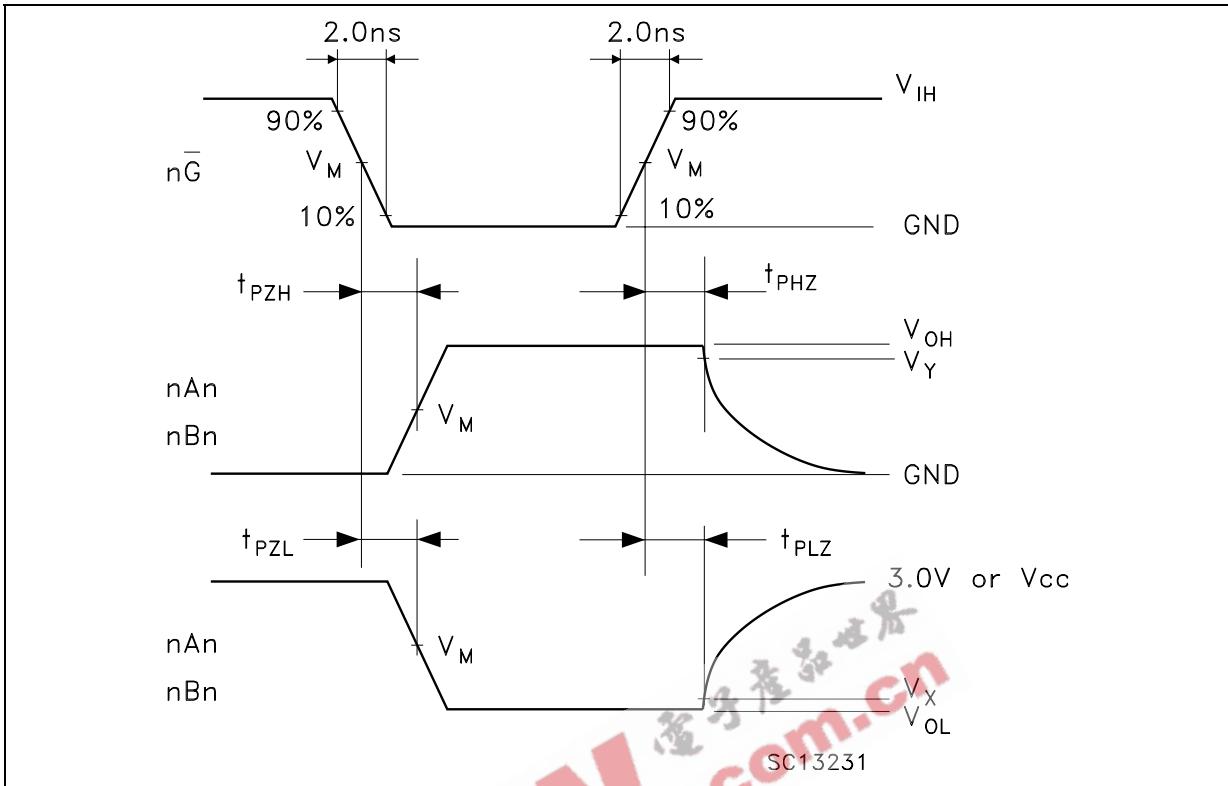


**Figure 7: Waveform - I<sup>2</sup>C Propagation Delay Time (f = 400KHz; 50% duty cycle, C<sub>L</sub> = 15pF)**

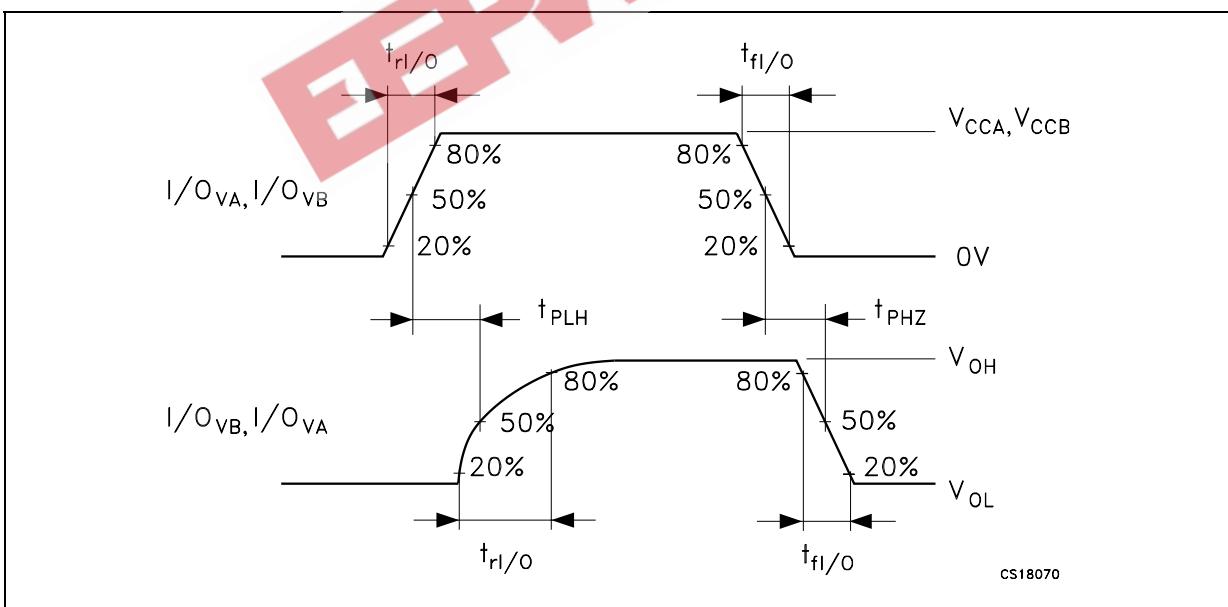

## TSSOP48 MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.2			0.047
A1	0.05		0.15	0.002		0.006
A2		0.9			0.035	
b	0.17		0.27	0.0067		0.011
c	0.09		0.20	0.0035		0.0079
D	12.4		12.6	0.488		0.496
E		8.1 BSC			0.318 BSC	
E1	6.0		6.2	0.236		0.244
e		0.5 BSC			0.0197 BSC	
K	0°		8°	0°		8°
L	0.45		0.75	0.018		0.030

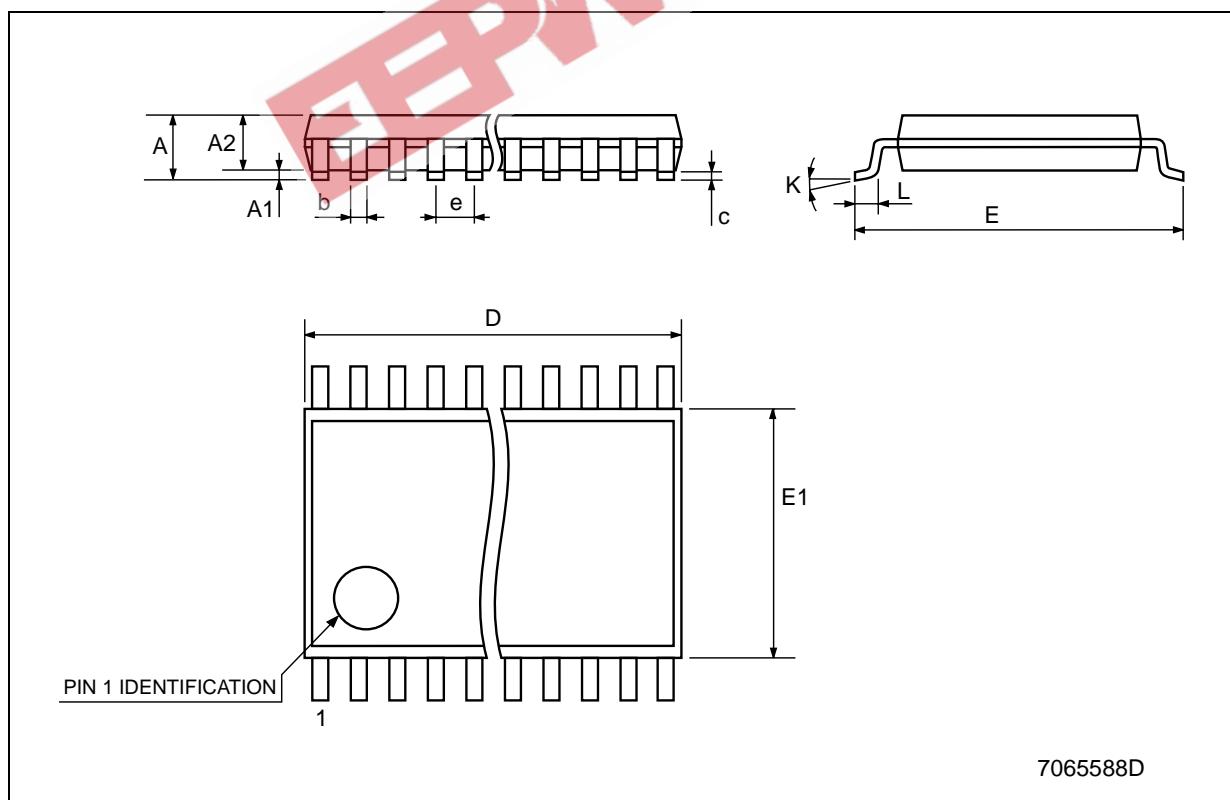

7065588D


## TFBGA54 MECHANICAL DATA

DIM.	mm.			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.2			47.2
A1	0.25			9.8		
A2	0.78		0.86	30.7		33.8
B	0.35	0.4	0.45	13.7	15.7	17.7
D	7.9		8.1	311.0		318.9
D1		6.4			252.0	
E	5.4	5.5	5.6	212.6	216.5	220.5
E1		4			157.5	
e		0.8			31.5	
SE		0.4			15.7	

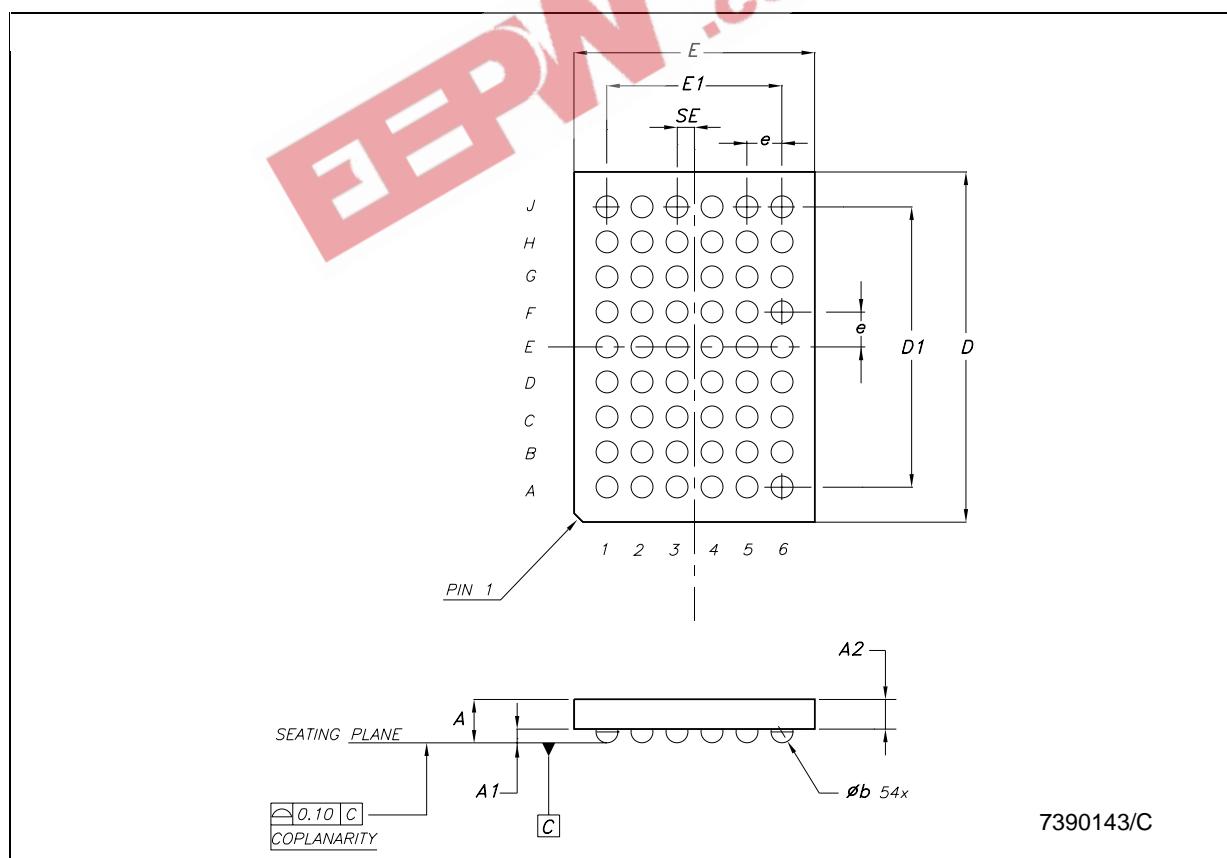

<b><math>\mu</math>TFBGA42 MECHANICAL DATA</b>						
DIM.	mm.			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.


A	1.0	1.1	1.16	39.4	43.3	45.7
A1			0.25			9.8
A2	0.78		0.86	30.7		33.9
b	0.25	0.30	0.35	9.8	11.8	13.8
D	3.9	4.0	4.1	153.5	157.5	161.4
D1		3			118.1	
E	3.4	3.5	3.6	133.9	137.8	141.7
E1		2.5			98.4	
e		0.5			19.7	
SE		0.25			9.8	

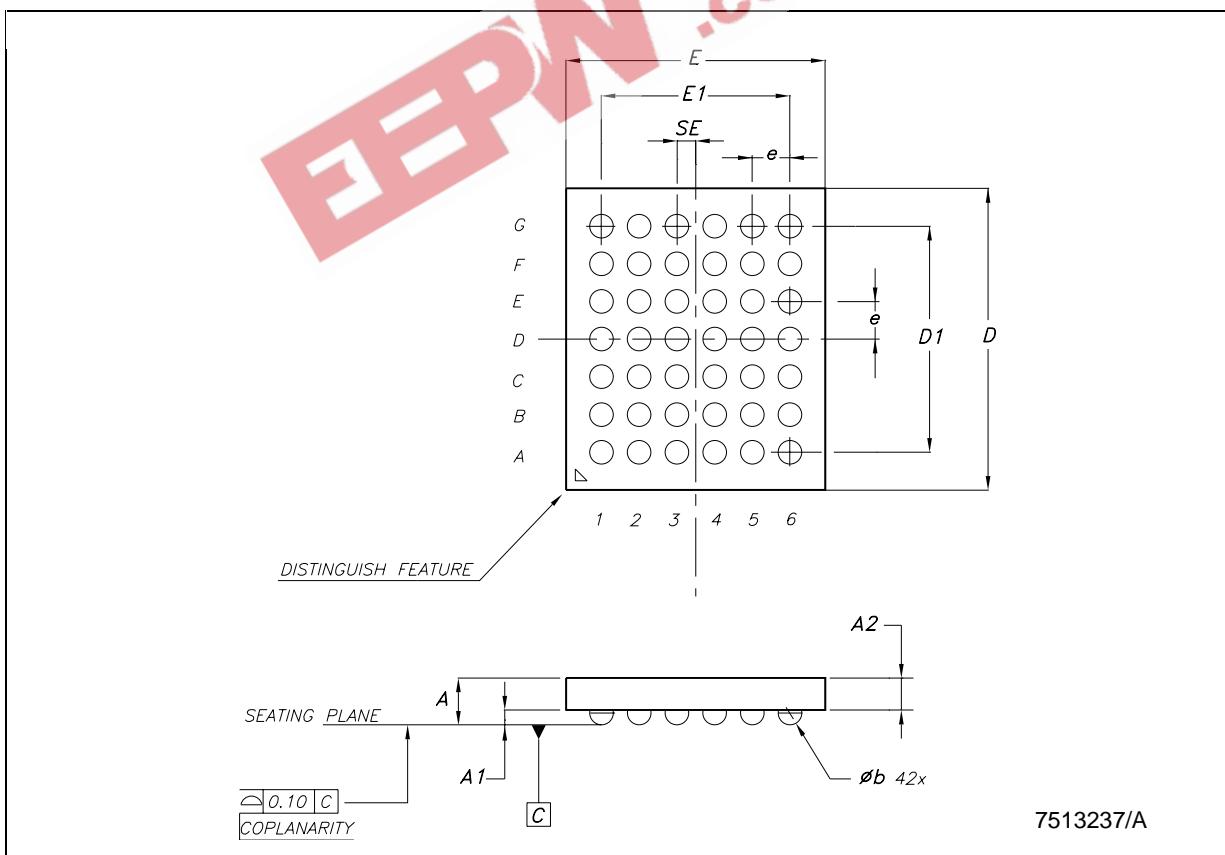


7513237/A

## Tape &amp; Reel TSSOP48 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			30.4			1.197
Ao	8.7		8.9	0.343		0.350
Bo	13.1		13.3	0.516		0.524
Ko	1.5		1.7	0.059		0.067
Po	3.9		4.1	0.153		0.161
P	11.9		12.1	0.468		0.476

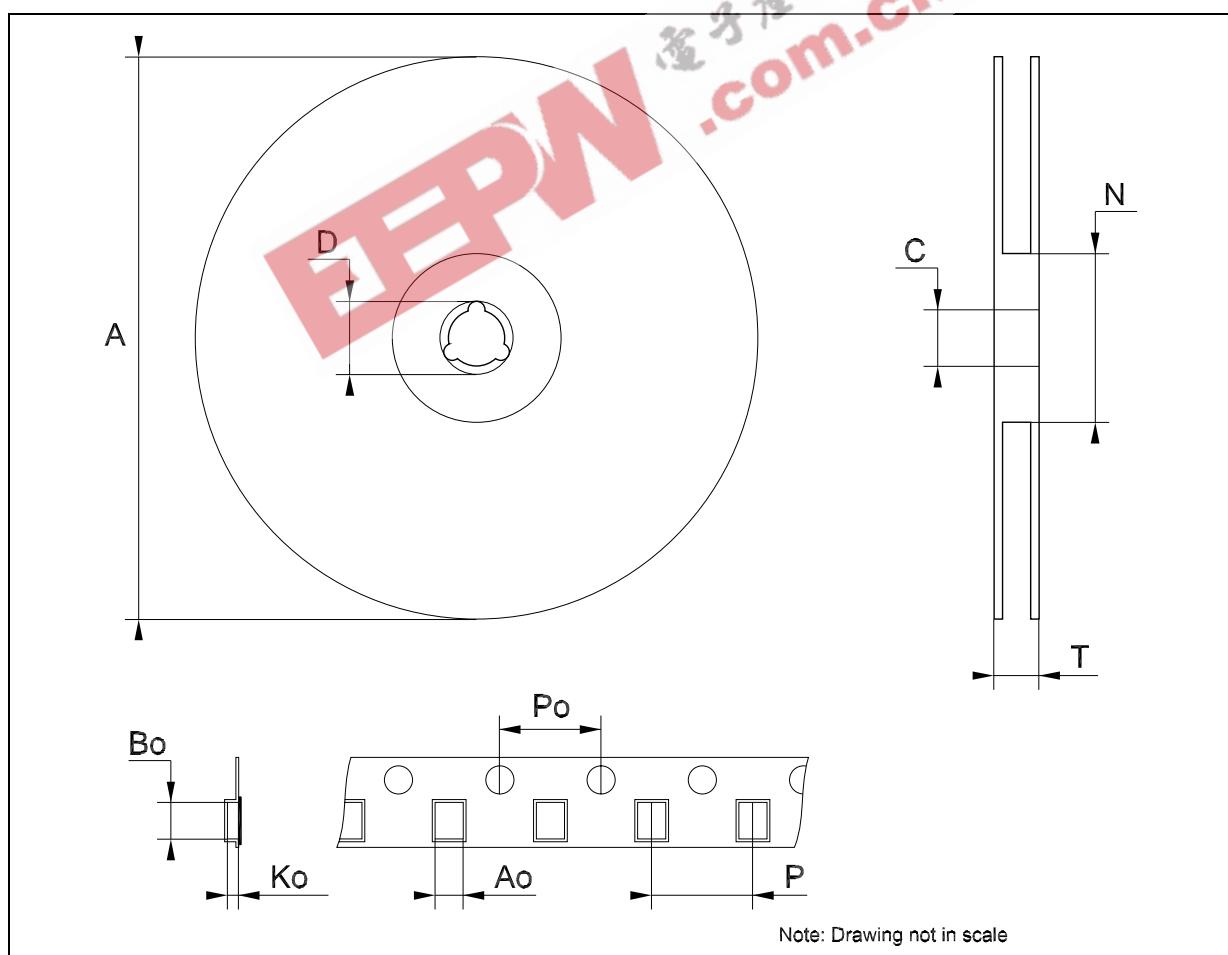


Tape & Reel TFBGA42 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			14.4			0.567
Ao		3.8			0.149	
Bo		4.3			0.169	
Ko		1.05			0.041	
Po	3.9		4.1	0.153		0.161
P	7.9		8.1	0.311		0.319

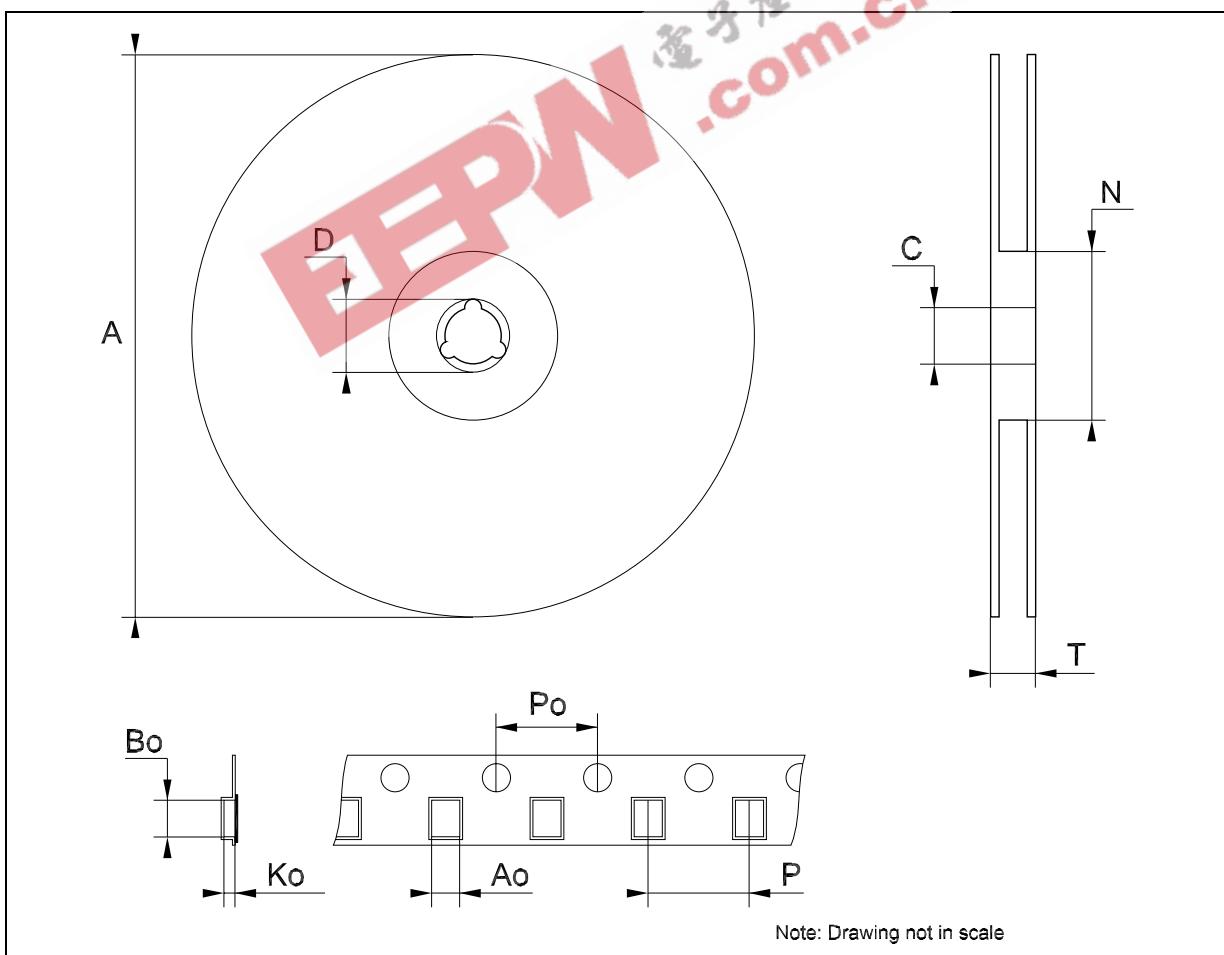

## Tape &amp; Reel TFBGA54 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao		6.1			0.240	
Bo		8.6			0.339	
Ko		1.8			0.071	
Po	3.9		4.1	0.153		0.161
P	7.9		8.1	0.311		0.319

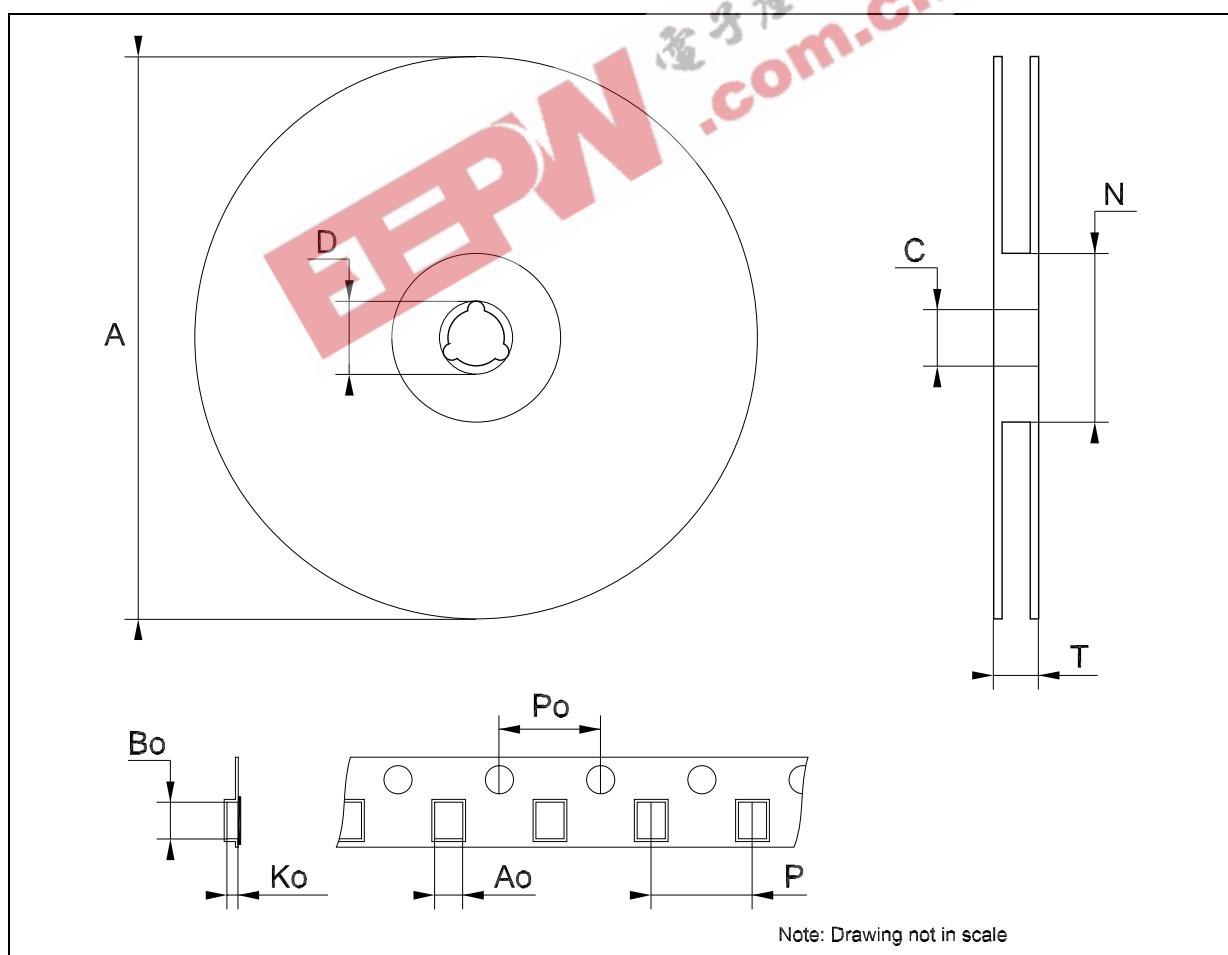

**Table 15: Revision History**

Date	Revision	Description of Changes
01-Oct-2004	1	First Release.

EEBN  
通号  
www.com.cn

**EEN** 电子技术  
.com.cn

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America  
[www.st.com](http://www.st.com)