


2.50mm (0.098") PITCH CONNECTOR



Flexible Board-to-Board
Jumper Socket

YJN250 Series
DIP



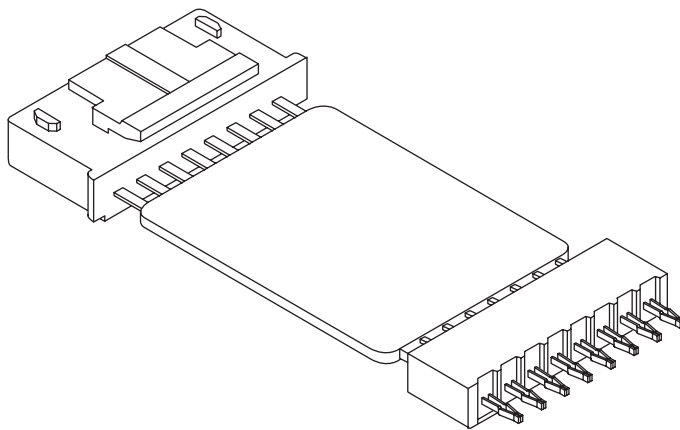


Material

| I/NO | DESCRIPTION | TITLE | MATERIAL |
|------|-------------|---------|-----------------------------|
| 1 | HOUSING | | PA66, UL94 V Grade |
| 2 | HOUSING | YJN250 | PA66, UL94 V Grade |
| 3 | INSULATION | | PVC |
| 4 | TERMINAL | YJNT250 | Phosphor Bronze, Thin-plate |

Available Pin

| PARTS NO. | DIM. A | DIM. B | DIM. C |
|-----------|--------|--------|--------|
| YJN250-03 | 9.0 | 9.9 | 2.5 |
| YJN250-04 | 11.5 | 12.4 | 5.0 |
| YJN250-05 | 14.0 | 14.9 | 7.5 |
| YJN250-06 | 16.5 | 17.4 | 10.0 |
| YJN250-07 | 19.0 | 19.9 | 12.5 |
| YJN250-08 | 21.5 | 22.4 | 15.0 |
| YJN250-09 | 24.0 | 24.9 | 17.5 |
| YJN250-10 | 26.5 | 27.4 | 20.0 |
| YJN250-11 | 29.0 | 29.9 | 22.5 |
| YJN250-12 | 31.5 | 32.4 | 25.0 |
| YJN250-13 | 34.0 | 34.9 | 27.5 |
| YJN250-14 | 36.5 | 37.4 | 30.0 |
| YJN250-15 | 39.0 | 39.9 | 32.5 |

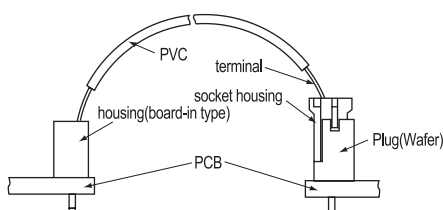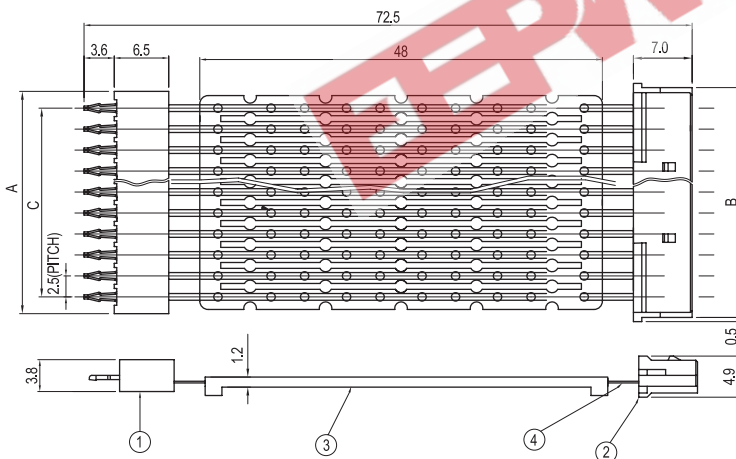

Application

Specification

| ITEM | SPEC |
|------------------------|------------|
| Voltage Rating | AC/DC 250V |
| Current Rating | AC/DC 3A |
| Operating Temperature | -25℃~+85℃ |
| Contact Resistance | - |
| Withstanding Voltage | - |
| Insulation Resistance | - |
| Applicable Wire | - |
| Applicable P.C.B | 1.2~1.6mm |
| Applicable FPC/FFC | - |
| Solder Height | - |
| Crimp Tensile Strength | - |
| UL FILE NO | E108706 |