


# 2.50mm (0.098") PITCH CONNECTOR



**Flexible Board-to-Board  
Jumper Socket**

**YJN250 Series  
DIP**

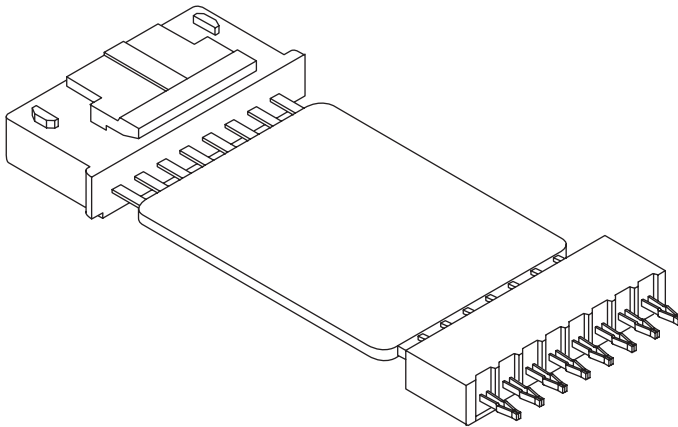


## Material

I/NO	DESCRIPTION	TITLE	MATERIAL
1	HOUSING		PA66, UL94 V Grade
2	HOUSING	YJN250	PA66, UL94 V Grade
3	INSULATION		PVC
4	TERMINAL	YJNT250	Phosphor Bronze, Thin-plate



## Available Pin

PARTS NO.	DIM. A	DIM. B	DIM. C
YJN250-03	9.0	9.9	2.5
YJN250-04	11.5	12.4	5.0
YJN250-05	14.0	14.9	7.5
YJN250-06	16.5	17.4	10.0
YJN250-07	19.0	19.9	12.5
YJN250-08	21.5	22.4	15.0
YJN250-09	24.0	24.9	17.5
YJN250-10	26.5	27.4	20.0
YJN250-11	29.0	29.9	22.5
YJN250-12	31.5	32.4	25.0
YJN250-13	34.0	34.9	27.5
YJN250-14	36.5	37.4	30.0
YJN250-15	39.0	39.9	32.5

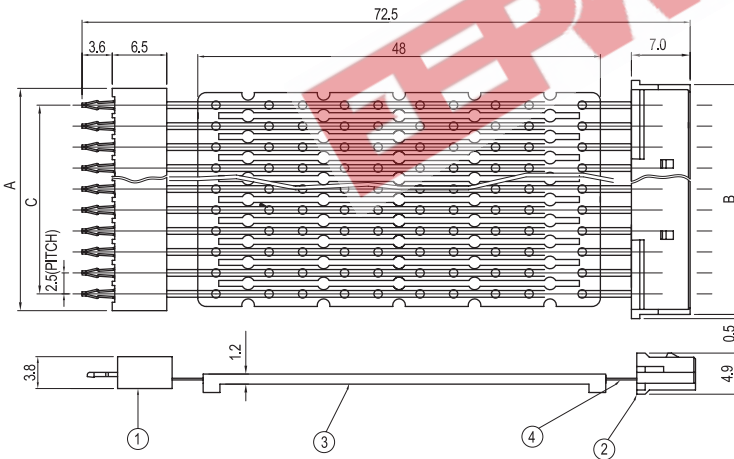

## Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 3A
Operating Temperature	-25°C~+85°C
Contact Resistance	-
Withstanding Voltage	-
Insulation Resistance	-
Applicable Wire	-
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	E108706

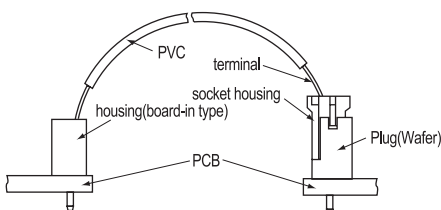

Application