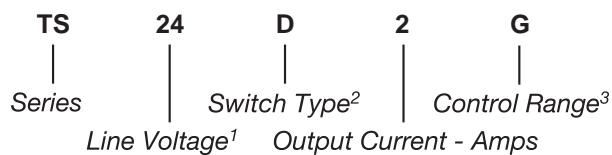
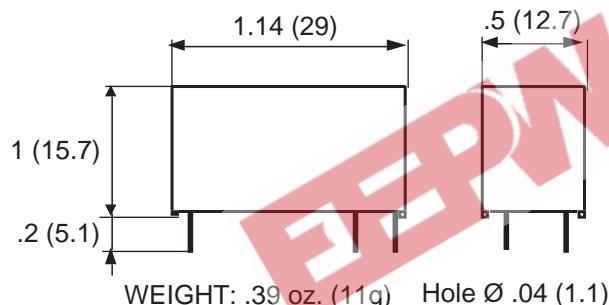


Part Number	Description
TS24D2G	2A, 275 Vac
TS3R2G	2.5A, 30 Vdc
TS3R1G	1A, 30 Vac/Vdc

**Part Number Explanation**

**NOTES**

- 1) Line Voltage (nominal): 24 = 240 Vac;  
3 = 30 Vdc (3–30 Vdc/Vac for TS3R1G)
- 2) Switch Type: D = Zero-cross turn-on; R = Random turn-on
- 3) Control Range: G = 12–30 Vdc/Vac (TS242G, TS3R1G)  
G = 12–30 Vdc (TS3R2G)

**MECHANICAL SPECIFICATION**

*Figure 1 — TS relays; dimensions in inches (mm)*
**INPUT (CONTROL) SPECIFICATION**

	Min	Max	Units
Control Range			
TS242G, TS3R1G	12	30	Vac/Vdc
TS3R2G	12	30	Vdc
Input Current Range	4.1	13	mA
(See Figure 2)			
Must Turn-Off Voltage		2.5	V
Input Resistance (Typical)		2100	Ohms

**FEATURES/BENEFITS**

- Pin-to-pin compatible with electromechanical relays
- AC and DC control
- AC and DC output
- Random and zero-cross turn-on
- Compact size
- High inrush capabilities
- Integrated clamping voltage

**DESCRIPTION**

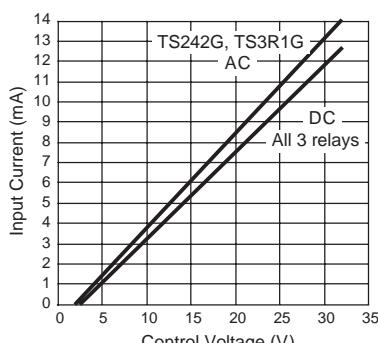
The Series TS relays provide AC/DC switching in a compact size. The TS relays also provide an AC/DC control. These relays can withstand high surge currents. The TS relays are pin-to-pin compatible with electromechanical relays and may be used as replacements.

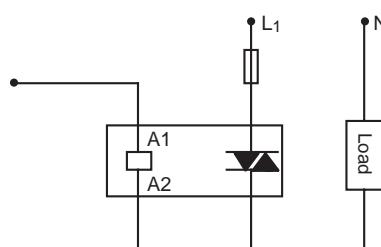
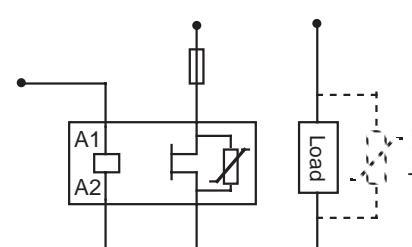
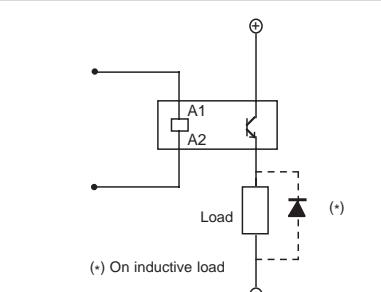
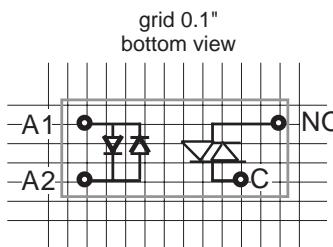
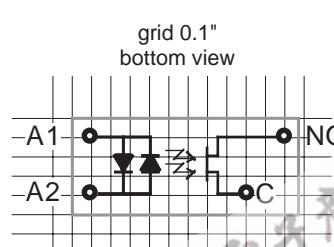
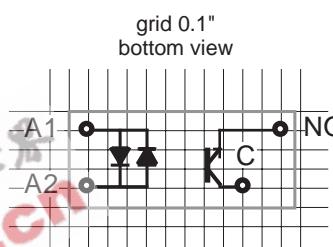
**APPLICATIONS**

- Interface applications
- Vending machines
- Light/lamp control
- Contactor driver
- Fan speed control

**APPROVALS**

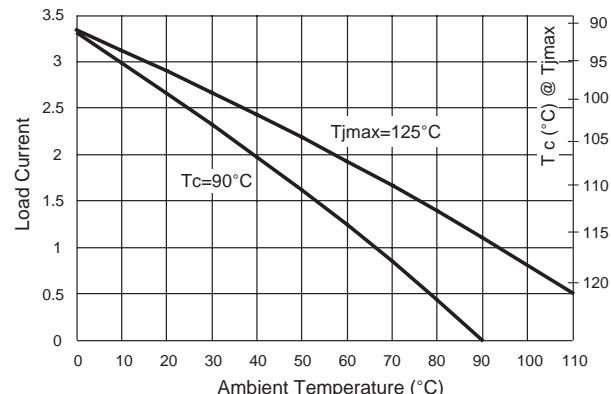
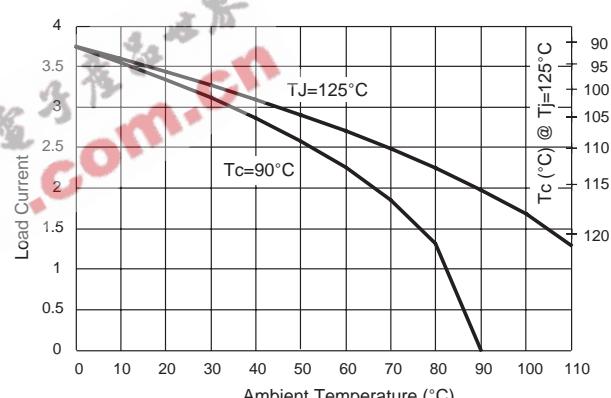
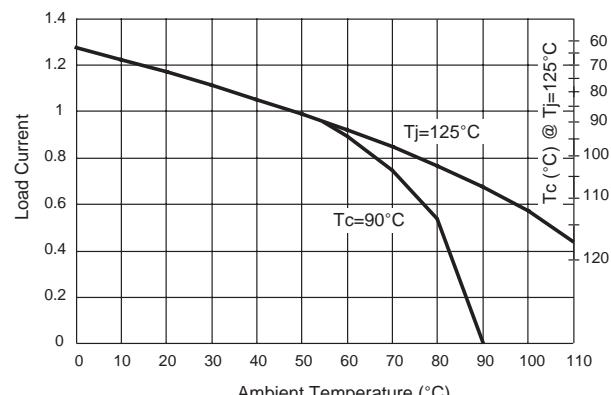
All models are UL recognized.  
UL File Number E128555.

**CONTROL CHARACTERISTIC**

*Figure 2 — TS Relays*

BLOCK DIAGRAM			
	Figure 3a — TS24D2G		
	Figure 3b — TS3R1G	C <sub>dump</sub>	
	Figure 3c — TS3R2G	(+) On inductive load	
GRID DIAGRAM			
	Figure 4a — TS24D2G	grid 0.1" bottom view	
	Figure 4b — TS3R1G	grid 0.1" bottom view	
	Figure 4c — TS3R2G	grid 0.1" bottom view	
OUTPUT (LOAD) SPECIFICATION			
	Min	Max	Unit
Operating Range			
TS24D2G	12	275	Vrms
TS3R2G	0	30	Vdc
TS3R1G	0	30	Vac/Vdc
Peak Voltage			
TS24D2G	600		V
TS3R2G	60		V
TS3R1G	60		V
Load Current Range			
TS24D2G	.05	2	Arms
TS3R2G	.001	2.5	Arms
TS3R1G	.001	1	Arms
Maximum Surge Current Rating (Non-Repetitive) (See Figure 6)			
TS24D2G	100	A	
TS3R2G	12	A	
TS3R1G	2.4	A	
OUTPUT (LOAD) SPECIFICATION (Continued)			
	Min	Max	Unit
On-State Voltage Drop			
TS24D2G	1.0		V
TS3R2G	0.5		V
TS3R1G	0.9		V
Zero-Cross Window (Typical)			
TS24D2G	±10		V
TS3R2G	NA		
TS3R1G	NA		
Off-State Leakage Current (60Hz)			
All relays	1		mA
Operating Frequency Range			
TS24D2G	1	440	Hz
TS3R1G	0	50	KHz
Turn-On Time (60Hz)			
TS24D2G	10		ms
TS3R2G	50		μs
TS3R1G	5		ms

**OUTPUT (LOAD) SPECIFICATION (Continued)**

	Min	Max	Unit
Turn-Off Time (60Hz)			
TS24D2G	17	ms	
TS3R2G	600	μs	
TS3R1G	10	ms	
Off-State dv/dt			
TS24D2G	500	V/μs	
Switching Frequency			
TS3R2G	100	Hz	
TS3R1G	10	Hz	
I <sup>2</sup> t for Match Fusing (<8.3ms)			
TS24D2G	50	A <sup>2</sup> S	
ENVIRONMENTAL SPECIFICATION			
	Min	Max	Unit
Maximum Junction Temperature	125	°C	
Operating Temperature			
TS24D2G	-40	100	°C
TS3R2G	-40	100	°C
TS3R1G	-40	90	°C
Input-Output Isolation			
TS24D2G	4000	V	
TS3R2G	2500	V	
TS3R1G	4000	V	
Junction-Case Thermal Resistance			
TS24D2G	12	°C/W	
TS3R2G	12	°C/W	
TS3R1G	44	°C/W	
Junction-Ambient Thermal Resistance			
TS24D2G	44	°C/W	
TS3R2G	44	°C/W	
TS3R1G	88	°C/W	
Maximum Soldering Heat (1mm case)			
	260	°C	

**THERMAL CURVE**

*Figure 5a — TS24D2G*

*Figure 5b — TS3R2G*

*Figure 5c — TS3R1G*

**NON-REPETITIVE SURGE CURRENT**

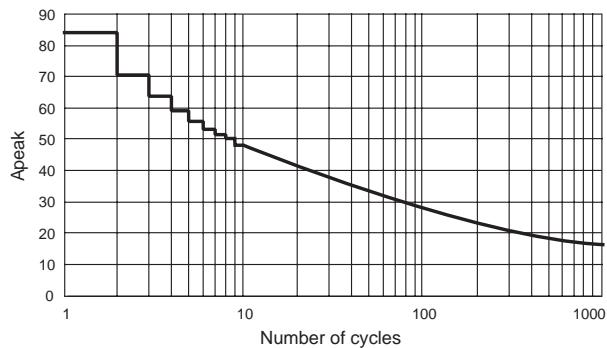


Figure 6a — TS24D2G

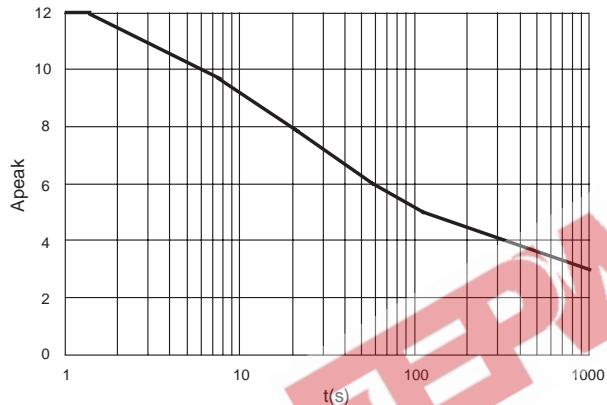


Figure 6b — TS3R2G

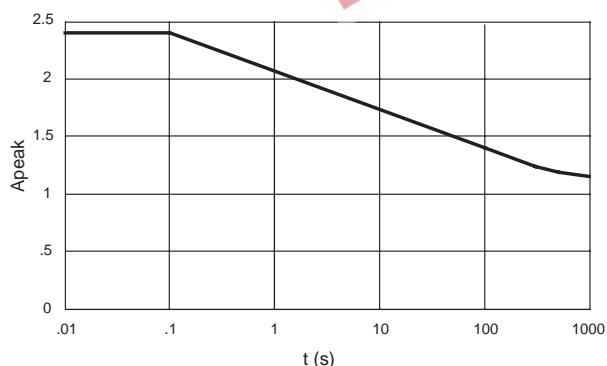


Figure 6c — TS3R1G

**NOTES:**

1. On inductive loads, a free-wheeling diode (or clamp) is recommended.
2. Electrical specifications at 25°C unless otherwise specified.
3. TS3R2G no polarity on the control pins.
4. For additional/custom options, contact factory.