




240-264A
Glenair MIL-DTL-26482 Series II Type
Connector Adapter

B

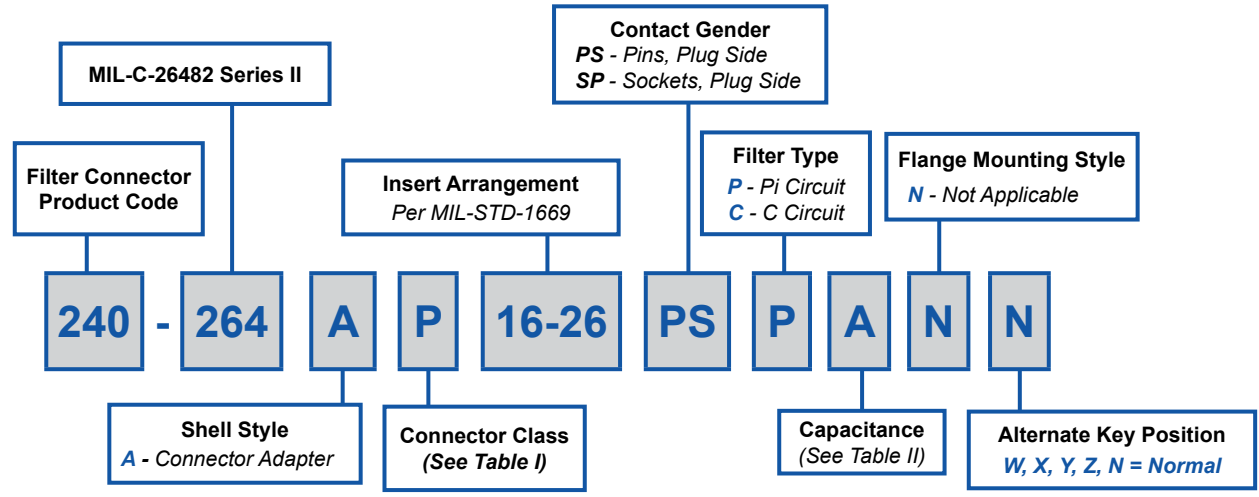

240-264A
**Glenair MIL-DTL-26482 Series II Type
 Connector Adapter**



TABLE I: CONNECTOR CLASS

| SYM | CLASS | MATERIAL | FINISH DESCRIPTION |
|-----|---------------|-----------------|--|
| M | Environmental | Aluminum | Electroless Nickel |
| MT | Environmental | Aluminum | Ni-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer |
| NF | Environmental | Aluminum | Cadmium O.D. Over Electroless Nickel |
| P | Environmental | Stainless Steel | Electro-Deposited Nickel |
| ZN | Environmental | Aluminum | Zinc-Nickel Over Electroless Nickel |
| H2 | Hermetic | Stainless Steel | Electroless Nickel |

**TABLE II: CAPACITOR ARRAY CODE
 CAPACITANCE RANGE**

| CLASS | PI - CIRCUIT (pF) | C - CIRCUIT (pF) |
|-------|-------------------|------------------|
| X* | 160,000 - 240,000 | 80,000 - 120,000 |
| Y* | 80,000 - 120,000 | 40,000 - 60,000 |
| Z* | 60,000 - 90,000 | 30,000 - 45,000 |
| A | 38,000 - 56,000 | 19,000 - 28,000 |
| B | 32,000 - 45,000 | 16,000 - 22,500 |
| C | 18,000 - 33,000 | 9,000 - 16,500 |
| D | 8,000 - 12,000 | 4,000 - 6,000 |
| E | 3,300 - 5,000 | 1,650 - 2,500 |
| F | 800 - 1,300 | 400 - 650 |
| G | 400 - 600 | 200 - 300 |

* Reduced DWV – Please consult factory.

TABLE III: SHELL SIZE

| SHELL SIZE | A MAX | B MAX |
|------------|--------------|--------------|
| 08 | .474 (12.0) | .750 (19.1) |
| 10 | .591 (15.0) | .859 (21.8) |
| 12 | .751 (19.1) | 1.031 (26.2) |
| 14 | .875 (22.2) | 1.156 (29.4) |
| 16 | 1.001 (25.4) | 1.281 (32.5) |
| 18 | 1.126 (28.6) | 1.391 (35.3) |
| 20 | 1.251 (31.8) | 1.531 (38.9) |
| 22 | 1.376 (35.0) | 1.656 (42.1) |
| 24 | 1.501 (38.1) | 1.777 (45.1) |