

Silicon PNP Power Transistors

2SA1789

DESCRIPTION


- With TO-247 package
- Complement to type 2SC4653
- Low collector saturation voltage

APPLICATIONS

- For audio output applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

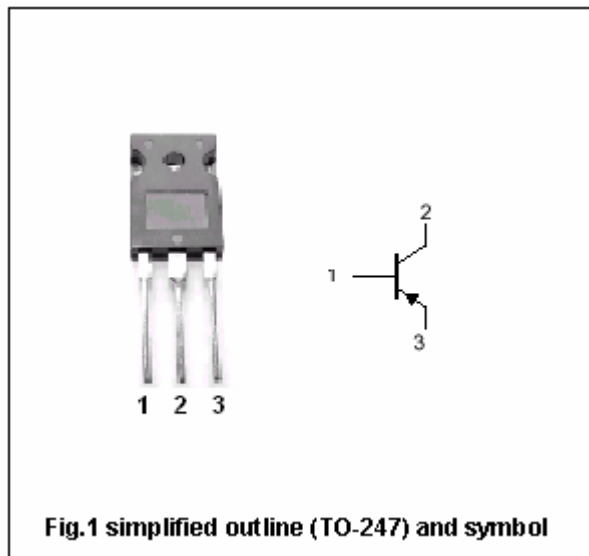

Absolute maximum ratings(Tc=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	-60	V
V _{CEO}	Collector-emitter voltage	Open base	-60	V
V _{EBO}	Emitter-base voltage	Open collector	-5	V
I _C	Collector current		-12	A
P _C	Collector power dissipation	T _C =25°C	80	W
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

Silicon PNP Power Transistors

2SA1789

CHARACTERISTICS

 $T_j=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-25\text{mA}; I_B=0$	-60			V
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=-1\text{mA}; I_E=0$	-60			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=-1\text{mA}; I_C=0$	-5			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=-6\text{A}; I_B=-0.6\text{A}$			-0.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=-6\text{A}; I_B=-0.6\text{A}$			-2.0	V
I_{CBO}	Collector cut-off current	$V_{CB}=-60\text{V}; I_E=0$			-10	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=-5\text{V}; I_C=0$			-10	μA
h_{FE}	DC current gain	$I_C=-2\text{A}; V_{CE}=-2\text{V}$	60		320	

◆ h_{FE} classifications

D	E	F
60-120	100-200	160-320

Silicon PNP Power Transistors

2SA1789

PACKAGE OUTLINE

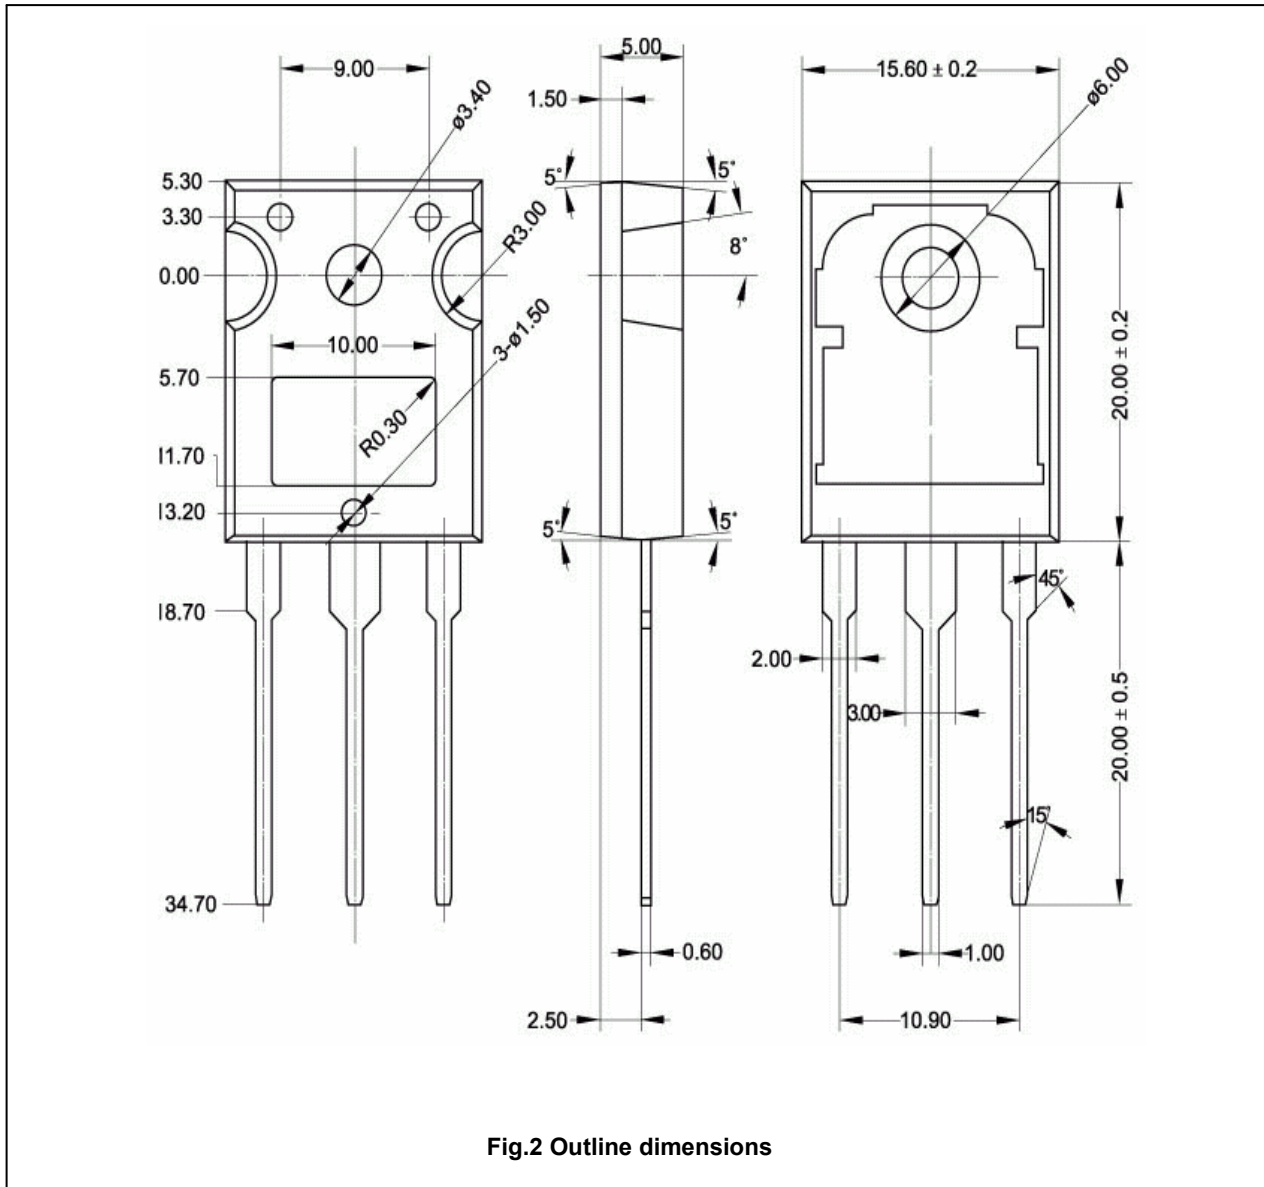


Fig.2 Outline dimensions