

isc Silicon PNP Power Transistor

2SA877

DESCRIPTION



- High Power Dissipation-
: $P_C = 100W(\text{Max.})@T_C=25^\circ\text{C}$
- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = -80V(\text{Min.})$

APPLICATIONS

- Designed for power amplifier and general purpose applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current-Continuous	-10	A
I_B	Base Current-Continuous	-4	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	100	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~150	$^\circ\text{C}$

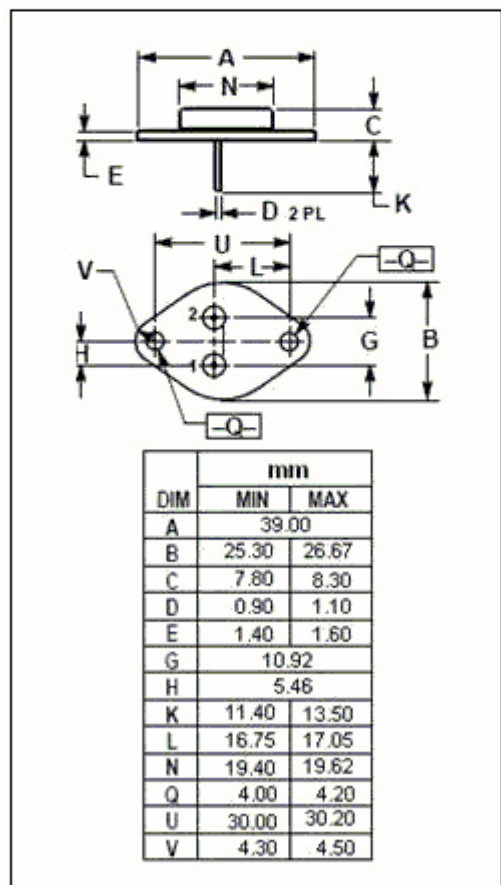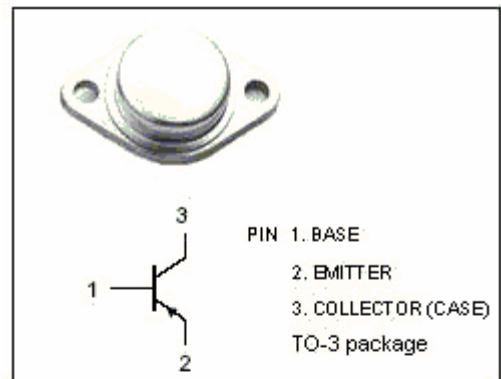

isc Silicon PNP Power Transistor**2SA877****ELECTRICAL CHARACTERISTICS****T_j=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -50mA ; I _B = 0	-80			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -5A; I _B = -0.5A			-2.0	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -80V; I _E = 0			-0.1	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = -6V; I _C = 0			-0.1	mA
h _{FE}	DC Current Gain	I _C = -3A ; V _{CE} = -4V	30			
C _{OB}	Output Capacitance	I _E = 0; V _{CB} = -10V; f= 1MHz		255		pF
f _T	Current-Gain—Bandwidth Product	I _E = 0.5A; V _{CE} = -12V		15		MHz