

# Micro-D Filter Connectors Vertical Printed Circuit Board



**Printed Circuit Board Micro-D Filter Connectors.** These vertical mount PCB connectors are ideal for flexible circuit or motherboard applications.

**Key Features include** gold plated TwistPin contacts, machined aluminum shells, and either Pi or C filter elements. These environmentally sealed connectors are designed to meet the requirements of MIL-DTL-83513.

**Integral Board Standoffs and Pre-Tinned Tails**—These connectors are solder dipped (63/37 SnPb) and feature a full complement of mounting hardware options.

## HOW TO ORDER MICRO-D FILTER VERTICAL MOUNT PCB CONNECTORS


Series	Shell Finish	Number of Contacts	Contact Type	Filter Type	Filter Class	PC Tail Length	Hardware Option
240-031	1 – Cadmium	9	P Pin	C C Filter	A B C D E F G	1 – .110 Inches (2.79)	NN – No Jackpost, No Threaded Insert
	2 – Nickel	15					PN – Extended Jackpost for .062" (1.6) PCB, No Threaded Insert
	4 – Black Anodize	21	S Socket	P Pi Filter		2 – .250 Inches (6.35)	RN – Extended Jackpost for .196" (5.0) PCB, No Threaded Insert
		25					NU – Threaded Insert Only, No Jackposts
	5 – Gold	31				PU – Short Jackpost and Threaded Insert	
	6 – Chem Film	37					
							<p><b>Rear Panel Jackposts With Threaded Inserts</b></p> <p>R6U – 0.125" (3.2) Panel                      R5U – 0.094" (2.4) Panel                      R4U – 0.062" (1.6) Panel                      R3U – 0.047" (1.2) Panel                      R2U – 0.031" (0.8) Panel</p> <p><b>JackscREW Options</b></p> <p>M – Hex Head Jackscrews                      S – Slot Head Jackscrews</p>
<b>Sample Part Number</b>							
240-031	2	– 25	P	C	D	1	PN



## MICRO-D FILTER VERTICAL PCB DIMENSIONS

Layout	A Max.		B		C Max.		D Max.		E Max.		F	
	In.	mm.	In. ±.003	mm. ±0.08	In.	mm.	In.	mm.	In.	mm.	In. ±.004	mm. ±0.10
<b>9P</b>	.785	19.94	.565	14.35	.333	8.46	.184	4.67	.310	7.87	.183	4.65
<b>9S</b>	.785	19.94	.565	14.35	.400	10.16	.250	6.35	.310	7.87	.195	4.95
<b>15P</b>	.935	23.75	.715	18.16	.483	12.27	.184	4.67	.310	7.87	.183	4.65
<b>15S</b>	.935	23.75	.715	18.16	.551	14.00	.250	6.35	.310	7.87	.195	4.95
<b>21P</b>	1.085	27.56	.865	21.97	.633	16.08	.184	4.67	.310	7.87	.183	4.65
<b>21S</b>	1.085	27.56	.865	21.97	.701	17.81	.250	6.35	.310	7.87	.195	4.95
<b>25P</b>	1.185	30.01	.965	24.51	.733	18.62	.184	4.67	.310	7.87	.183	4.65
<b>25S</b>	1.185	30.01	.965	24.51	.801	20.35	.250	6.35	.310	7.87	.195	4.95
<b>31P</b>	1.335	33.91	1.115	28.32	.883	22.43	.184	4.67	.310	7.87	.183	4.65
<b>31S</b>	1.335	33.91	1.115	28.32	.951	24.16	.250	6.35	.310	7.87	.195	4.95
<b>37P</b>	1.485	37.72	1.265	32.13	1.033	26.24	.184	4.67	.310	7.87	.183	4.65
<b>37S</b>	1.485	37.72	1.265	32.13	1.101	27.96	.250	6.35	.310	7.87	.195	4.95

MICRO-D FILTER VERTICAL PCB HARDWARE OPTIONS

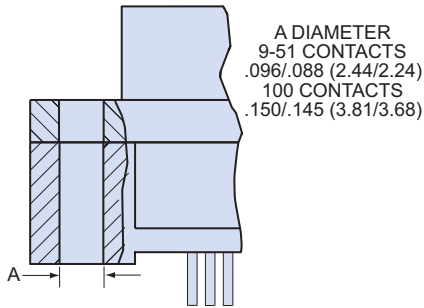

**NN Style**

Connector Supplied Without Hardware  
Thru-Hole, No Hardware



**NU Style**

Connector Supplied With Threaded Inserts



**PU Style**

Jackpost with Threaded Insert




**RU Style**

Rear Panel Jackpost with Threaded Insert



**Extended Jackpost**  
**PN Style for .062" PCB**  
**RN Style for .196" PCB**



**M Style**

Hex Head Jackscrew with E-Ring



**S Style**

Slot Head Jackscrew with E-Ring

F

## MICRO-D FILTER VERTICAL PCB LAYOUTS— PIN CONNECTOR SHOWN


PC Tail Diameter  $.018 \pm .002$  ( $0.46 \pm 0.05$ )

Contact numbers shown are for pin connectors. Reverse for socket.


Patterns shown are for connector mounting side of PC board.




**9 Contacts**

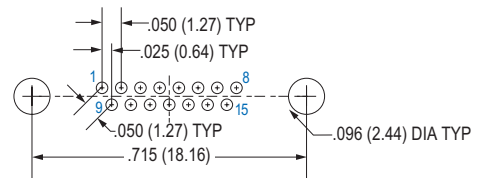


**15 Contacts**

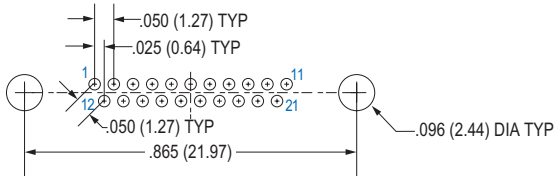


**21 Contacts**

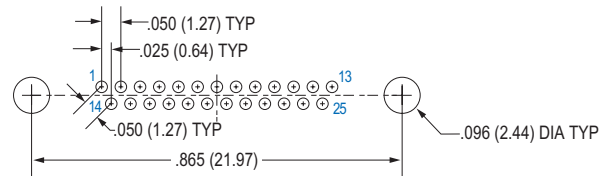

**25 Contacts**

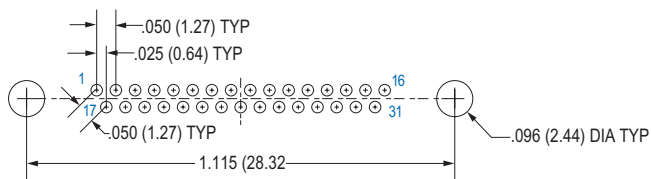

**31 Contacts**

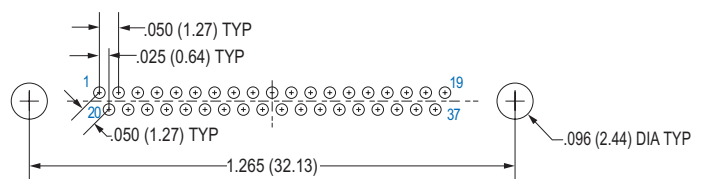

**37 Contacts**