

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07287 D7-33-2)

SILICON PNP TRIPLE DIFFUSED TYPE

**2SA1264**

POWER AMPLIFIER APPLICATIONS.


## FEATURES:

- Complementary to 2SC3181
- Recommend for 55W High Fidelity Audio Frequency Amplifier Output Stage.

MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CB0}$	-120	V
Collector-Emitter Voltage	$V_{CE0}$	-120	V
Emitter-Base Voltage	$V_{EB0}$	-5	V
Collector Current	$I_C$	-8	A
Base Current	$I_B$	-0.8	A
Collector Power Dissipation ( $T_c=25^\circ\text{C}$ )	$P_C$	80	W
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 ~ 150	$^\circ\text{C}$

Unit in mm

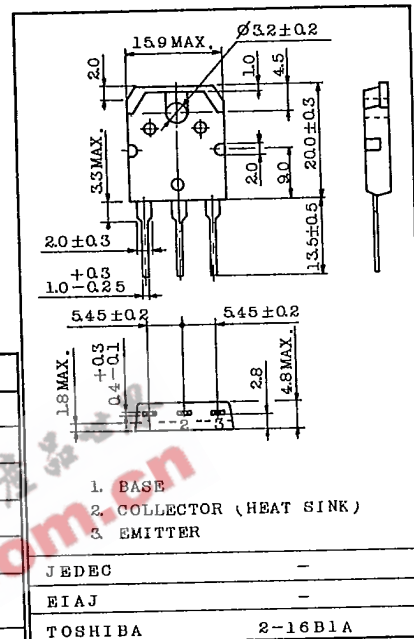

Weight : 4.6g

ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )







CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=-120\text{V}, I_E=0$	-	-	-5.0	$\mu\text{A}$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=-5\text{V}, I_C=0$	-	-	-5.0	$\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-50\text{mA}, I_B=0$	-120	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=-5\text{V}, I_C=-1\text{A}$	55	-	160	
	$h_{FE(2)}$	$V_{CE}=-5\text{V}, I_C=-4\text{A}$	35	75	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-6\text{A}, I_B=-0.6\text{A}$	-	-0.80	-2.0	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=-5\text{V}, I_C=-4\text{A}$	-	-0.97	-1.5	V
Transition Frequency	$f_T$	$V_{CE}=-5\text{V}, I_C=-1\text{A}$	-	30	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$	-	420	-	pF

Note :  $h_{FE(1)}$  Classification R : 55 ~ 110 O : 80 ~ 160

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)  
**2SA1264**

56C 07288 DT-33-21

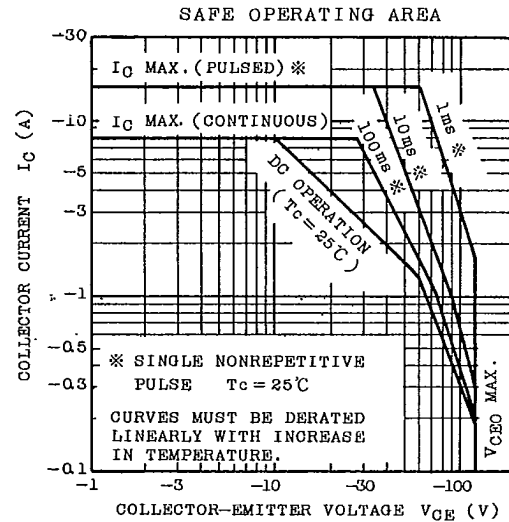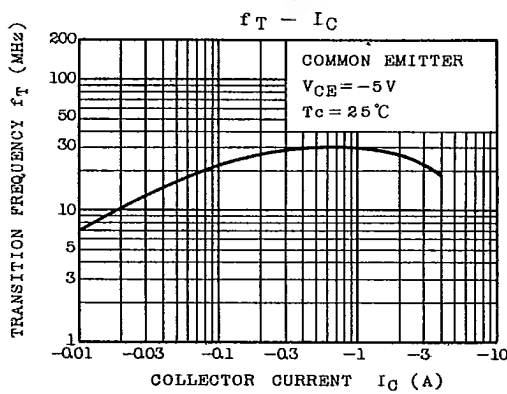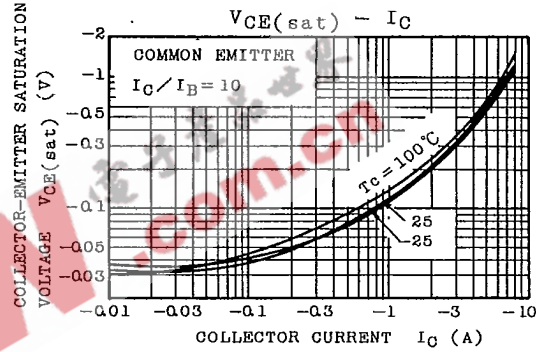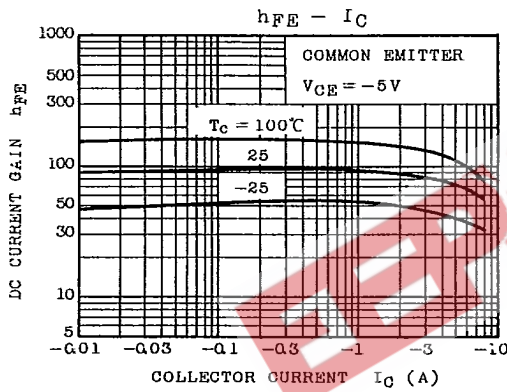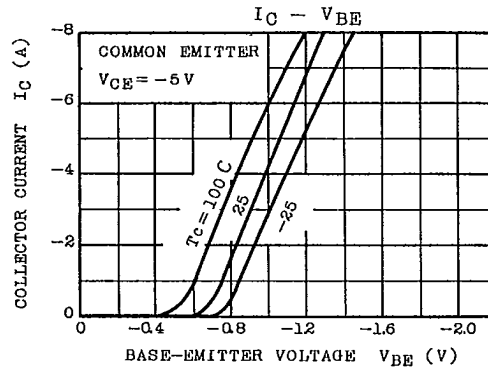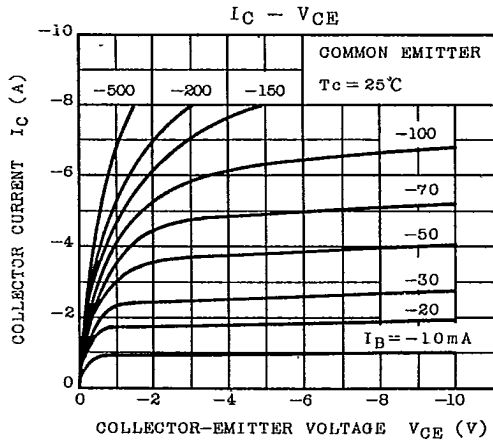

TOSHIBA CORPORATION