

DESCRIPTION The 2SC2000 is designed for use in AM/RF stage of CAR RADIO and general purpose applications.


FEATURES

- High Electrostatic-Discharge-Resistant (E-B reverse bias)
 - ESDR 1: TYP. 500 V (C=1 000 pF)
 - ESDR 2: TYP. 1 600 V (C=100 pF)
- Low f_T , $C_c \cdot r_{b'b}$ and NF.
 - f_T : TYP. 70 MHz ($V_{CE}=6.0$ V, $I_E=-1.0$ mA)
 - $C_c \cdot r_{b'b}$: TYP. 6.0 ps ($V_{CB}=6.0$ V, $I_E=-10$ mA, $f=31.9$ MHz)
 - NF: TYP. 3.0 dB ($V_{CE}=6.0$ V, $I_C=1.0$ mA, $f=1.0$ MHz, $R_G=500 \Omega$)

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures	
Storage Temperature	-55 to +150 °C
Junction Temperature	+150 °C Maximum
Maximum Power Dissipation ($T_a=25$ °C)	
Total Power Dissipation	600 mW
Maximum Voltages and Currents ($T_a=25$ °C)	
V_{CBO} Collector to Base Voltage	60 V
V_{CEO} Collector to Emitter Voltage	50 V
V_{EBO} Emitter to Base Voltage	5.0 V
I_C Collector Current	200 mA
I_B Base Current	20 mA

PACKAGE DIMENSIONS
in millimeters (inches)

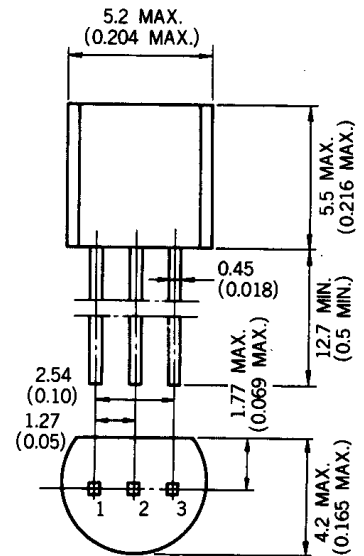

1. EMITTER EIAJ : SC-43A
2. COLLECTOR JEDEC : TO-92
3. BASE IEC : PA33

ELECTRICAL CHARACTERISTICS ($T_a=25$ °C)

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
h_{FE}	DC Current Gain	40	90	180	—	$V_{CE}=6.0$ V, $I_C=1.0$ mA
C_{ob}	Output Capacitance		3.7	4.5	pF	$V_{CB}=6.0$ V, $I_E=0$, $f=1.0$ MHz
f_T	Gain Bandwidth Product	40	70		MHz	$V_{CE}=6.0$ V, $I_E=-1.0$ mA
NF	Noise Figure		3.0		dB	$V_{CE}=6.0$ V, $I_C=1.0$ mA $R_G=500 \Omega$, $f=1.0$ MHz
ESDR	Electrostatic-Discharge-Resistant		500		V	See Test Circuit
I_{CBO}	Collector Cutoff Current			100	nA	$V_{CB}=60$ V, $I_E=0$
I_{EBO}	Emitter Cutoff Current			100	nA	$V_{EB}=5.0$ V, $I_C=0$
V_{BE}	Base to Emitter Voltage	600	650	700	mV	$V_{CE}=6.0$ V, $I_C=1.0$ mA
$V_{CE(sat)}$	Collector Saturation Voltage		110	300	mV	$I_C=100$ mA, $I_B=10$ mA
$V_{BE(sat)}$	Base Saturation Voltage		0.85	1.5	V	$I_C=100$ mA, $I_B=10$ mA
$C_c \cdot r_{b'b}$	Collector to Base Time Constant		6.0	15	ps	$V_{CB}=6.0$ V, $I_E=-10$ mA $f=31.9$ MHz

Classification of h_{FE}

Rank	M	L	K
Range	40 - 80	60 - 120	90 - 180

h_{FE} Test Conditions : $V_{CE}=6.0$ V, $I_C=1.0$ mA