

SPECIFICATION

DEVICE NAME : Power MOSFET

TYPE NAME : 2SK2000-R

SPEC. No. :

EEPW 电子產品世界 .com.cn

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.	
DRAWN				DWG.NO.	1/10
CHECKED					

1. Scope
This specifies Fuji power MOSFET 2SK2000-R
2. Construction N-channel enhancement mode power MOSFET
3. Application for switching
4. Outview T0-3PF Outview See to 4/10 page
5. Absolute maximum ratings at Tc=25°C (unless otherwise specified)

Description	Symbol	Characteristics	Unit	Remarks
Drain-source voltage	V_{DS}	100	V	
Drain-gate voltage	V_{DGR}	100	V	$R_{GS} = 20 K\Omega$
Continuous Drain current	I_D	± 32	A	
Pulsed drain current	I_{Dpulse}	± 128	A	
Gate-source voltage	V_{GS}	± 20	V	
Maximum power dissipation	P_D	80	W	
Operating and storage temperature range	T_{ch}	150	°C	
	T_{sto}	-55 ~ +150	°C	

6. Electrical characteristics at Tc=25°C (unless otherwise specified)
- Static ratings

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Drain-source breakdown voltage	BV_{DSS}	$I_D = 1mA$ $V_{GS} = 0V$	100			V
Gate threshold voltage	$V_{GS(th)}$	$I_D = 10mA$ $V_{DS} = V_{GS}$	2.1	3.0	4.0	V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 100V$ $V_{GS} = 0V$	$T_{ch} = 25^\circ C$	10	500	μA
	I_{DSS}		$T_{ch} = 125^\circ C$	0.2	1.0	mA
Gate-source leakage current	I_{GSS}	$V_{GS} = \pm 20V$ $V_{DS} = 0V$		10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D = 16A$ $V_{GS} = 10V$		0.05	0.06	Ω

Dynamic ratings

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Forward transconductance	g_{fs}	$I_D = 16A$ $V_{DS} = 25V$	10	20		S
Input capacitance	C_{iss}	$V_{DS} = 25V$ $V_{GS} = 0V$ $f = 1MHz$		2000	3000	pF
Output capacitance	C_{oss}			500	800	pF
Reverse transfer capacitance	C_{rss}			120	180	pF
Turn-on time	$t_{d(on)}$	$V_{CC} = 30V$ $V_{GS} = 10V$ $I_D = 3A$ $R_{GS} = 50\Omega$		40	60	ns
	t_r			80	120	ns
Turn-off time	$t_{d(off)}$			350	500	ns
	t_f			120	180	ns

Reverse diode



Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Diode forward on-voltage	V_{SD}	$I_F = 2 \times I_{DR}$ $V_{GS} = 0V, T_{ch} = 25^\circ C$		1.5	2.0	V
Reverse recovery time	t_{rr}	$I_F = I_{DR}$ $V_{GS} = 0V$ $-dI_F/dt = 100A/\mu s$ $T_{ch} = 25^\circ C$		150		ns
Reverse recovery charge	Q_{rr}				1	μC

7. Thermal resistance

Description	Symbol	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	$R_{th_{ch-c}}$				1.56	$^\circ C/W$
	$R_{th_{ch-a}}$				30.0	$^\circ C/W$

FUJI POWER MOSFET

TYPE : 2SK2000-R

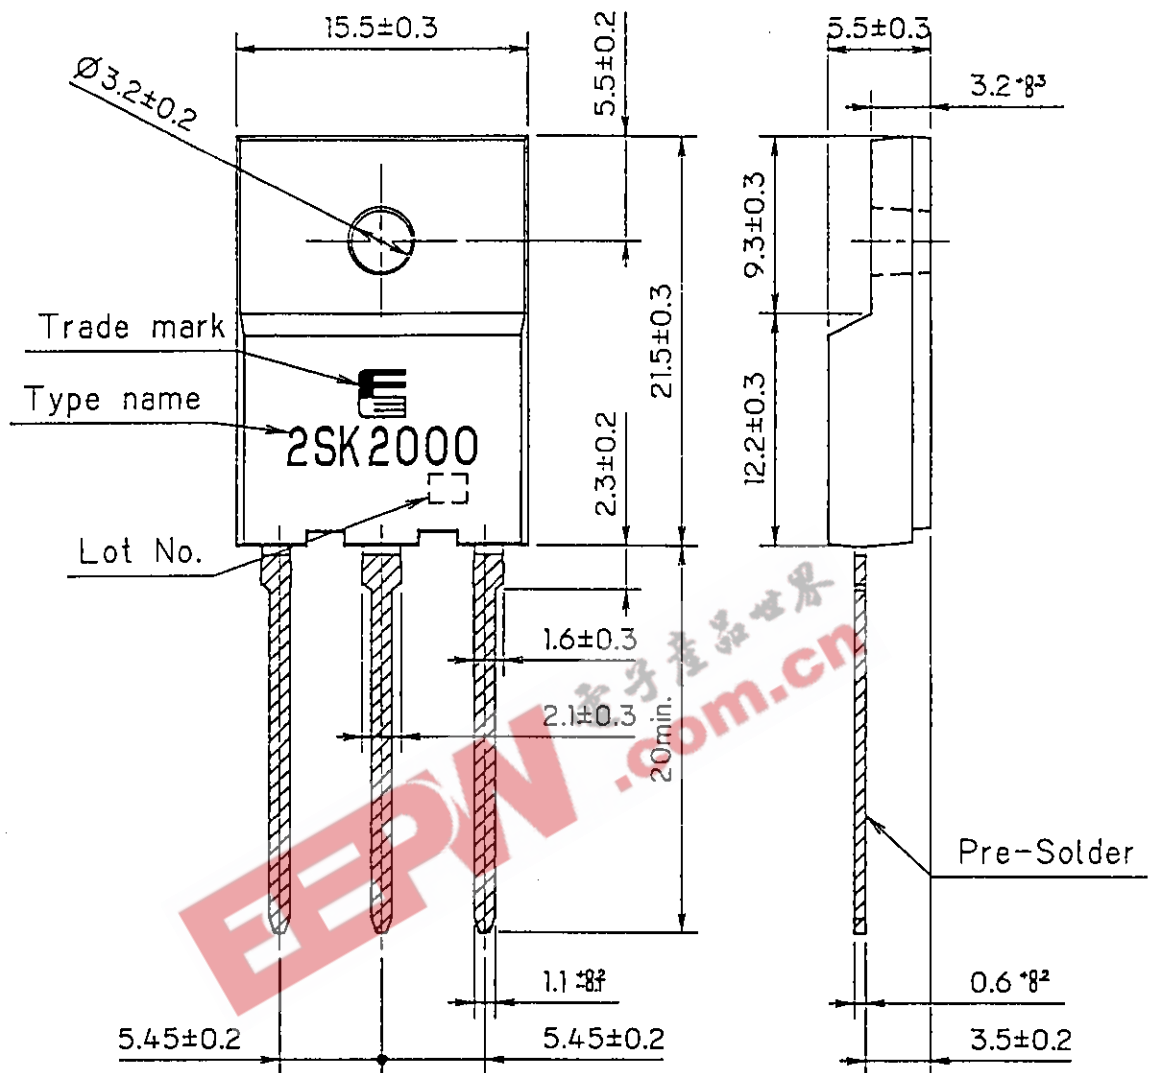

CONNECTION

- ① GATE
- ② DRAIN
- ③ SOURCE

DIMENSIONS ARE IN MILLIMETERS.


Fuji Electric Co.,Ltd.

DWG.NO.


4/10

Y 0257-R-003a


Power Dissipation
 $PD=f(T_C)$

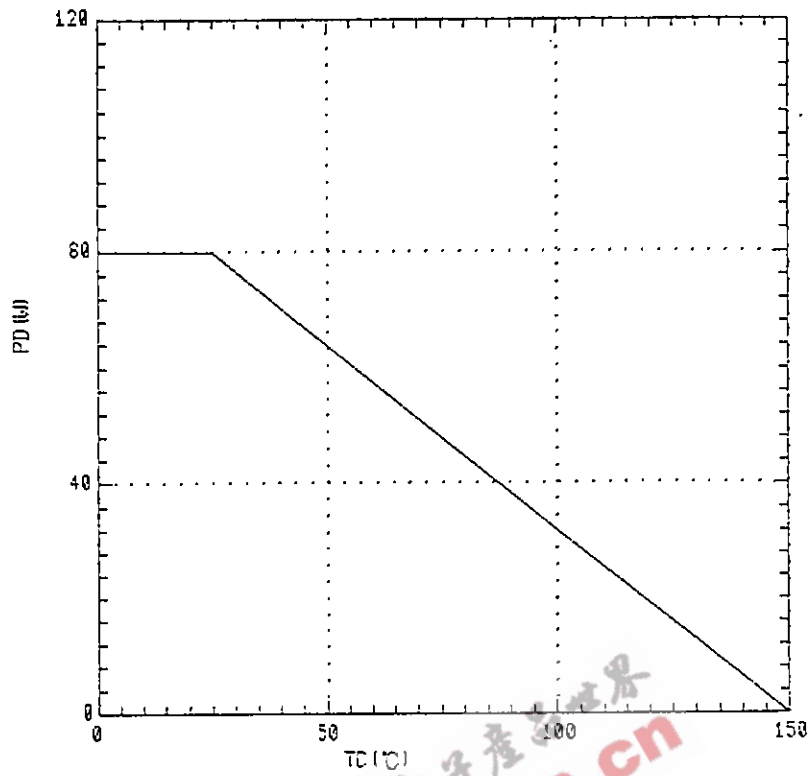


Safe operating area
 $ID=f(V_{DS}): D=0.01, T_c=25^\circ C$

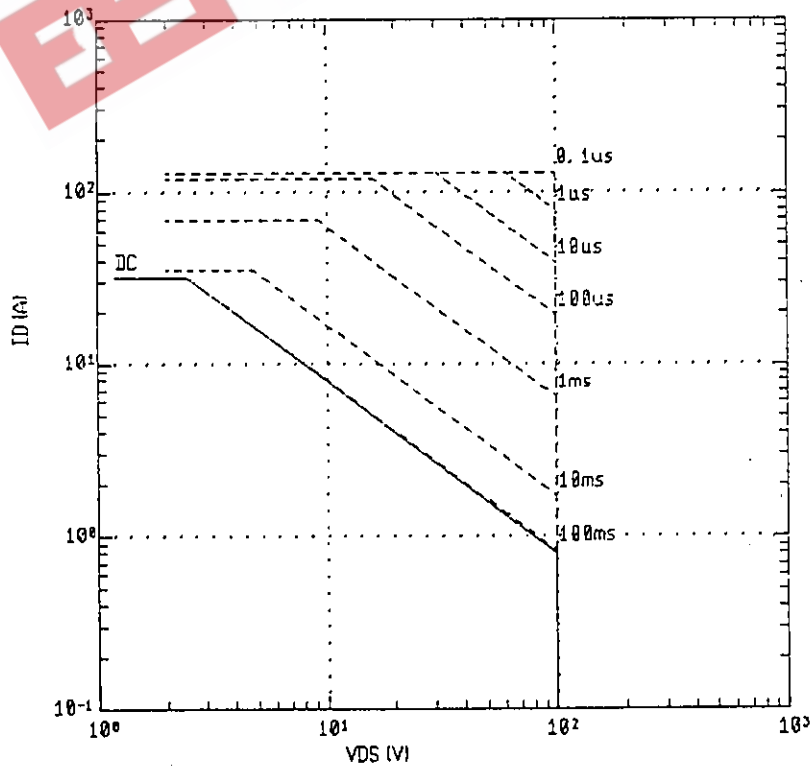


Typical output characteristics
 $I_D = f(V_{DS})$: 80 μ s pulse test, $T_{ch} = 25^\circ\text{C}$

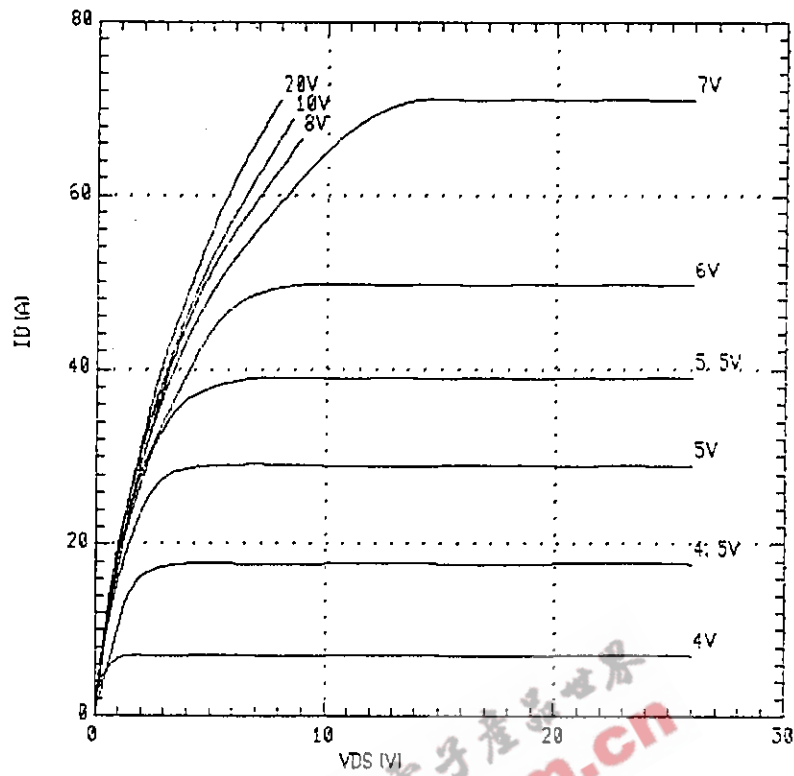


Typical Transfer Characteristic
 $I_D = f(V_{GS})$: 80 μ s pulse test, $V_{DS} = 25\text{V}$, $T_{ch} = 25^\circ\text{C}$

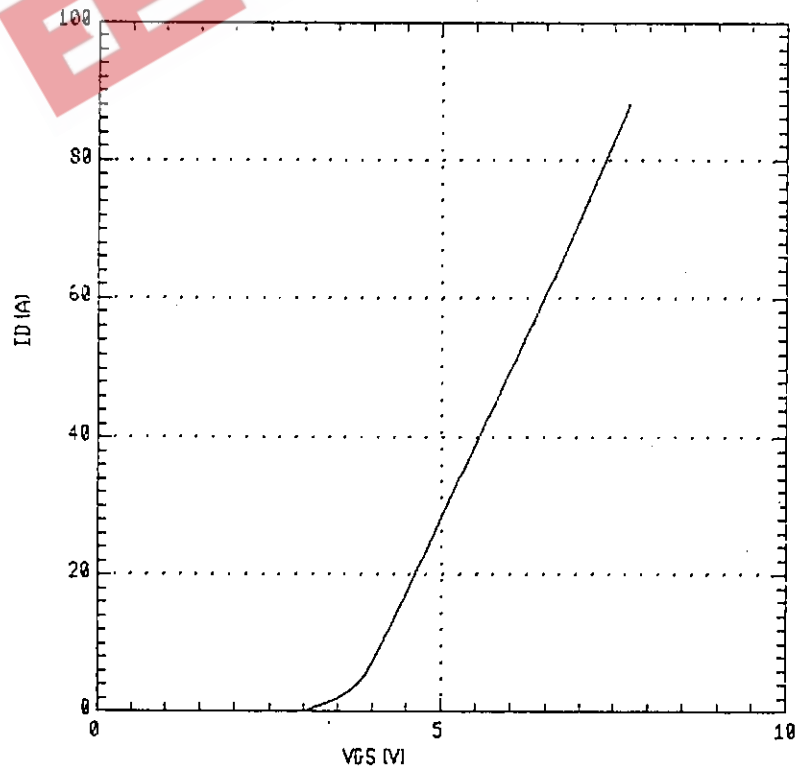


Typical Transconductance
 $g_{fs}=f(I_D): 80\mu s$ pulse test, $V_{DS}=25V, T_{ch}=25^\circ C$

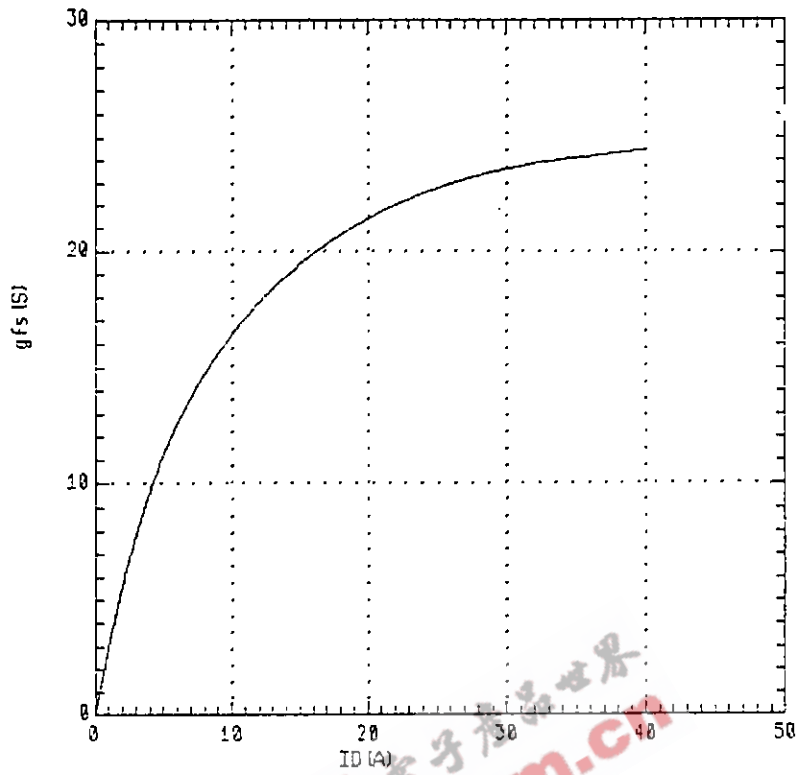


Typical Drain-source on-state resistance
 $R_{DS(on)}=f(I_D): 80\mu s$ pulse test, $T_{ch}=25^\circ C$

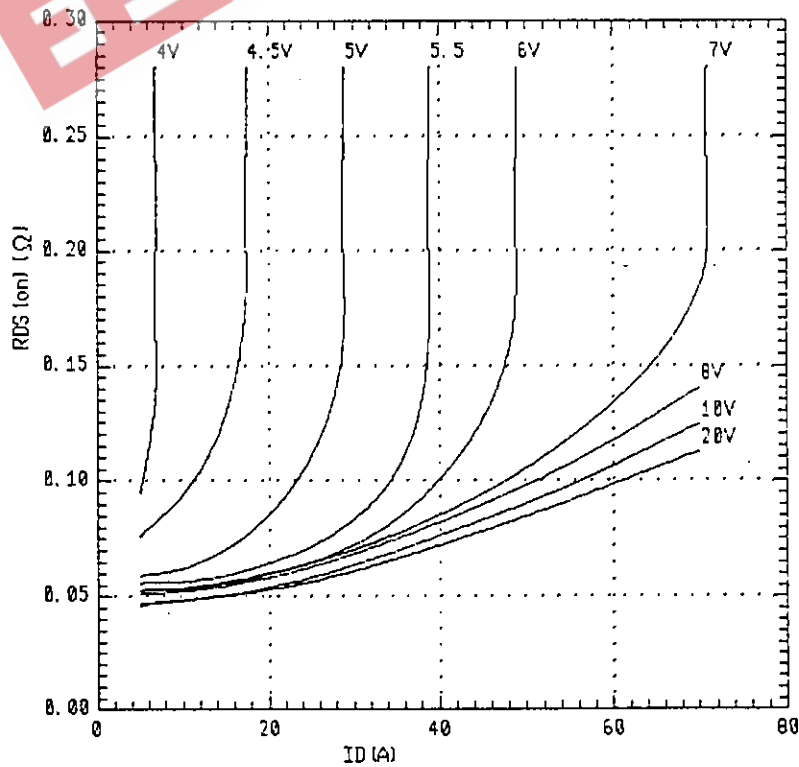


Drain-source on-state resistance
 $R_{DS(on)} = f(T_{ch}) : I_D = 16A, V_{GS} = 10V$

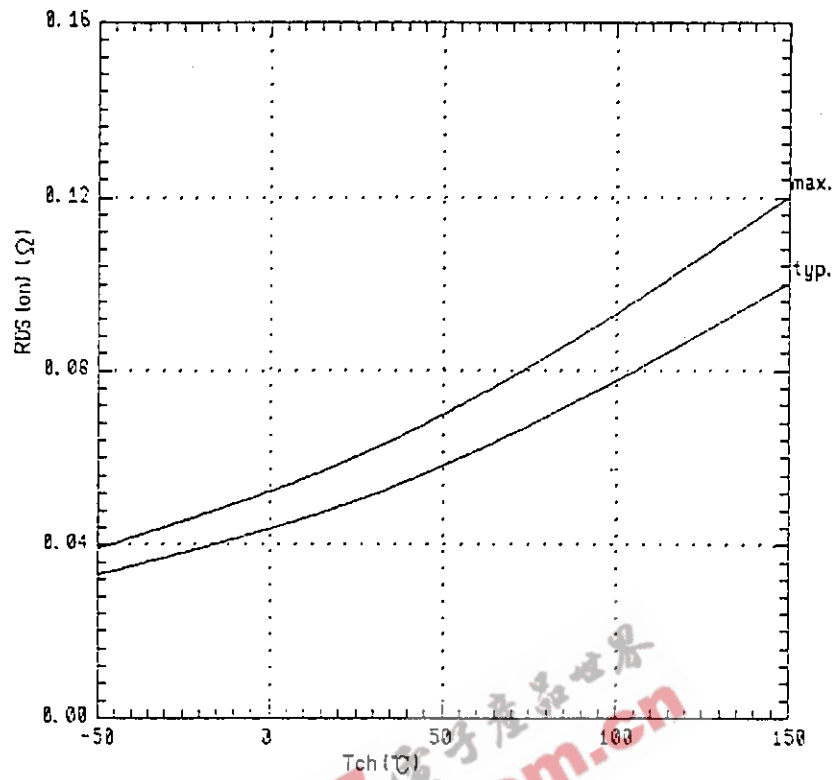


Gate threshold voltage
 $V_{GS(th)} = f(T_{ch}) : V_{DS} = V_{GS}, I_D = 10mA$

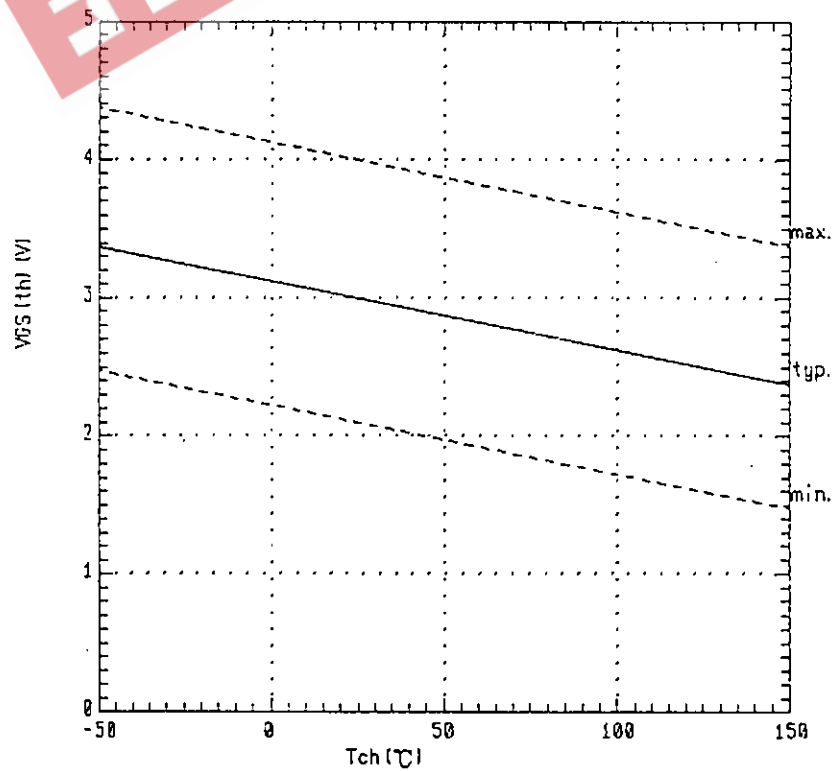


Typical gate charge characteristics
 $V_{GS} = f(Q_g) : I_D = 32A, T_{ch} = 25^\circ C$

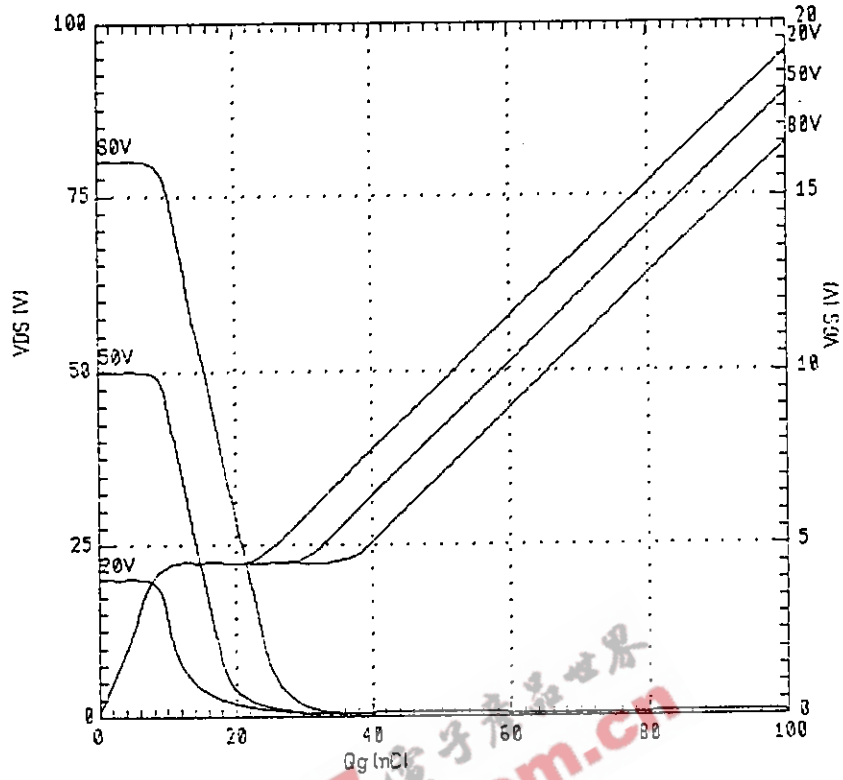

Typical capacitances
 $C = f(V_{DS}) : V_{GS} = 0V, f = 1MHz$

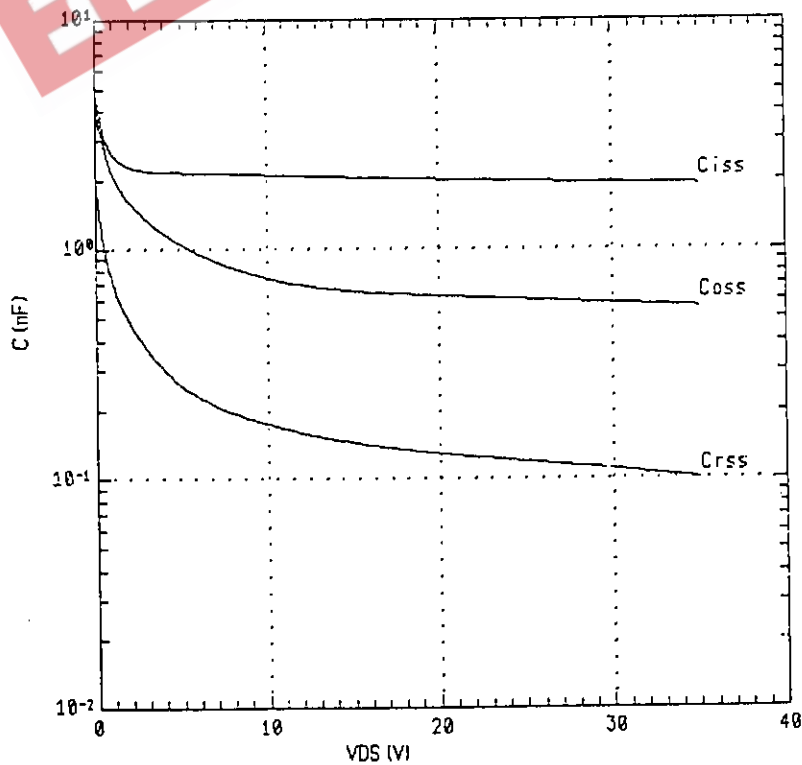

Forward characteristic of reverse diode
 $I_F=f(V_{SD}):80\mu s$ pulse test

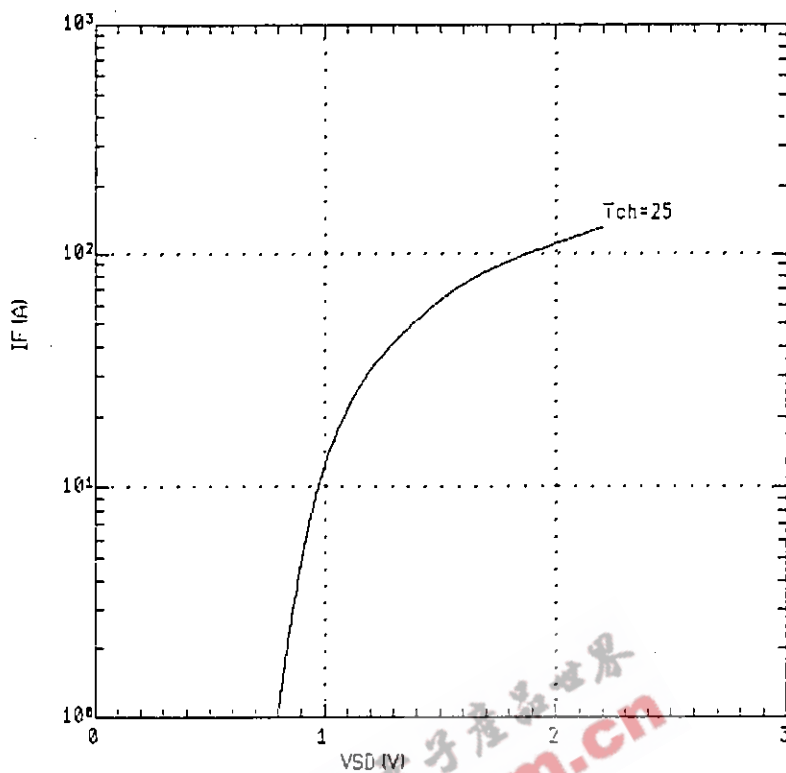

Transient thermal impedance $Z_{thch-c}=f(t)$ parameter: $D=t/T$

