



DC COMPONENTS CO., LTD.
INTEGRATED CIRCUIT

DA78L09
DA78L09A

TECHNICAL SPECIFICATIONS OF 3-TERMINAL POSITIVE VOLTAGE REGULATOR

Description


These regulators employ internal current limiting and thermal shutdown, making them essentially indestructible. They can deliver up to 100mA output current, if the case temperature can keep in $T_c=25^\circ\text{C}$. They are intended as fixed voltage regulators in a wide range of applications including local(on-card) regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power pass elements to make high-current voltage regulators.

Pinning

- 1 = Output
- 2 = Ground
- 3 = Input

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Input Voltage	V_I	30	V
Total Power Dissipation	P_D	Internal limit	W
Operating Temperature Range	T_{OPR}	0 to $+125$	$^\circ\text{C}$
Maximum Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to $+150$	$^\circ\text{C}$
Lead Temperature(Soldering 10 Sec.)	T_L	260	$^\circ\text{C}$

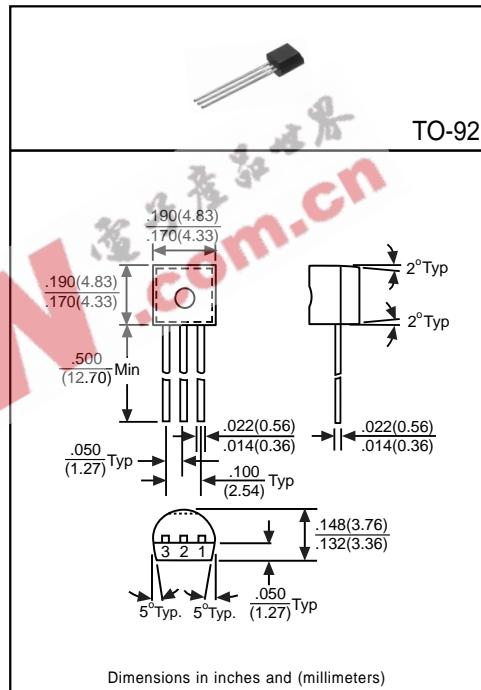

Electrical Characteristics

($V_{in}=15\text{V}$, $I_{out}=40\text{mA}$, $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$, $C_{in}=0.33\mu\text{F}$, $C_{out}=0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Output Voltage	DA78L09A	8.73	9.00	9.27	V	$T_J=25^\circ\text{C}$
	DA78L09	8.55	9.00	9.45		$1\text{mA} \leq I_{o} \leq 70\text{mA}$
	DA78L09A	8.55	-	9.45		$1\text{mA} \leq I_{o} \leq 40\text{mA}$ and $11.5\text{V} \leq V_{in} \leq 24\text{V}$
	DA78L09	8.50	-	9.50		$T_J=25^\circ\text{C}, 11.5\text{V} \leq V_{in} \leq 24\text{V}$
	DA78L09A	8.55	-	9.45		$T_J=25^\circ\text{C}, 13\text{V} \leq V_{in} \leq 24\text{V}$
	DA78L09	8.50	-	9.50		$T_J=25^\circ\text{C}, 1\text{mA} \leq I_{o} \leq 100\text{mA}$
Line Regulation		-	-	200	mV	$T_J=25^\circ\text{C}, 11.5\text{V} \leq V_{in} \leq 24\text{V}$
		-	-	150		$T_J=25^\circ\text{C}, 13\text{V} \leq V_{in} \leq 24\text{V}$
Load Regulation		-	-	45	mV	$T_J=25^\circ\text{C}, 1\text{mA} \leq I_{o} \leq 40\text{mA}$
		-	-	90		$T_J=25^\circ\text{C}, 1\text{mA} \leq I_{o} \leq 100\text{mA}$
Input Bias Current	I_{IB}	-	-	6.0	mA	$T_J=25^\circ\text{C}$
Input Bias Current Change		ΔI_{IB}	-	0.1	mA	$1\text{mA} \leq I_{o} \leq 40\text{mA}$
			-	1.5		$11.5\text{V} \leq V_{in} \leq 24\text{V}$
Output Noise Voltage	V_n	-	70	-	μV	$T_J=25^\circ\text{C}, 10\text{Hz} \leq f \leq 100\text{KHz}$
Ripple Rejection	RR	38	44	-	dB	$15\text{V} \leq V_{in} \leq 25\text{V}, f=120\text{Hz}$
Dropout Voltage	V_D	-	1.7	-	V	$T_J=25^\circ\text{C}$