




**MOTOROLA**

## OCTAL BIDIRECTIONAL TRANSCEIVER WITH 3-STATE INPUTS/OUTPUTS

The MC54/74F245 contains eight noninverting bidirectional buffers with 3-state outputs and is intended for bus-oriented applications. Current sinking capability is 24 mA at the A ports and 64 mA at the B ports. The Transmit/Receive ( $T/R$ ) input determines the direction of data flow through the bidirectional transceiver. Transmit (active HIGH) enables data from A ports to B ports; Receive (active LOW) enables data from B ports to A ports. The Output Enable input, when HIGH, disables both A and B ports by placing them in a high-Z condition.

- Noninverting Buffers
- Bidirectional Data Path
- B Outputs Sink 64 mA
- ESD > 4000 Volts

**CONNECTION DIAGRAM (TOP VIEW)**

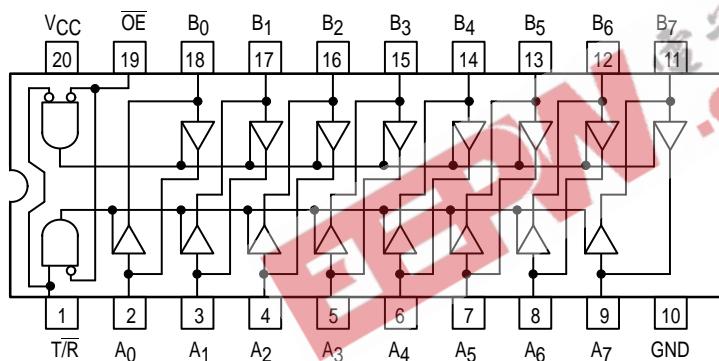


**FUNCTION TABLE**

Inputs		Output
OE	T/R	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	High-Z State

H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care

**MC54/74F245**

**OCTAL BIDIRECTIONAL TRANSCEIVER WITH 3-STATE INPUTS/OUTPUTS**  
**FAST™ SCHOTTKY TTL**

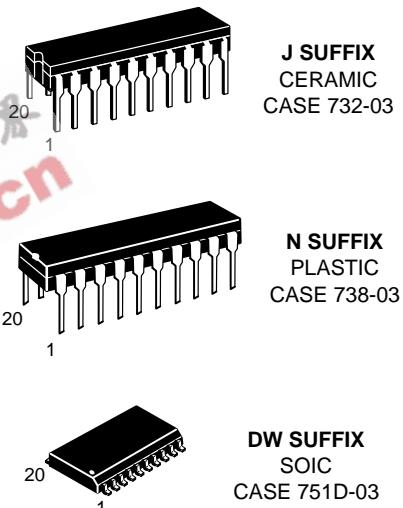

**ORDERING INFORMATION**

MC54FXXXJ	Ceramic
MC74FXXXN	Plastic
MC74FXXXDW	SOIC

**GUARANTEED OPERATING RANGES**

Symbol	Parameter			Min	Typ	Max	Unit
V <sub>CC</sub>	Supply Voltage		54, 74	4.5	5.0	5.5	V
T <sub>A</sub>	Operating Ambient Temperature Range		54	-55	25	125	°C
			74	0	25	70	
I <sub>OH</sub>	Output Current — High	A <sub>n</sub> Outputs	54, 74			-3.0	mA
I <sub>OL</sub>	Output Current — Low	A <sub>n</sub> Outputs	74			24	mA
			54			20	mA
I <sub>OH</sub>	Output Current — High	B <sub>n</sub> Outputs	54 74			-12 -15	mA
I <sub>OL</sub>	Output Current — Low	B <sub>n</sub> Outputs	54 74			48 64	mA

# MC54/74F245

## DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

Symbol	Parameter	Limits			Unit	Test Conditions		
		Min	Typ	Max				
V <sub>IH</sub>	Input HIGH Voltage	2.0			V	Guaranteed Input HIGH Voltage		
V <sub>IL</sub>	Input LOW Voltage			0.8	V	Guaranteed Input LOW Voltage		
V <sub>IK</sub>	Input Clamp Diode Voltage			-1.2	V	I <sub>IN</sub> = -18 mA	V <sub>CC</sub> = MIN	
V <sub>OH</sub>	Output HIGH Voltage, A <sub>n</sub> Outputs	54, 74	2.4	3.3	V	I <sub>OH</sub> = -3.0 mA	V <sub>CC</sub> = 4.50 V	
		74	2.7	3.3	V	I <sub>OH</sub> = -3.0 mA	V <sub>CC</sub> = 4.75 V	
V <sub>OH</sub>	Output HIGH Voltage, B <sub>n</sub> Outputs	54, 74	2.4	3.4	V	I <sub>OH</sub> = -3.0 mA	V <sub>CC</sub> = 4.50 V	
		74	2.7	3.4	V	I <sub>OH</sub> = -3.0 mA	V <sub>CC</sub> = 4.75 V	
		54	2.0		V	I <sub>OH</sub> = -12 mA	V <sub>CC</sub> = 4.50 V	
		74	2.0		V	I <sub>OH</sub> = -15 mA		
V <sub>OL</sub>	Output LOW Voltage, A <sub>n</sub> Outputs	54		0.35	V	I <sub>OL</sub> = 20 mA	V <sub>CC</sub> = MIN	
		74		0.35	V	I <sub>OL</sub> = 24 mA		
V <sub>OL</sub>	Output LOW Voltage, B <sub>n</sub> Outputs	54		0.55	V	I <sub>OL</sub> = 48 mA	V <sub>CC</sub> = MIN	
		74		0.55	V	I <sub>OL</sub> = 64 mA		
I <sub>OZH</sub> + I <sub>IH</sub>	Output Off Current HIGH			70	µA	V <sub>OUT</sub> = 2.7 V	V <sub>CC</sub> = MAX	
I <sub>OZL</sub> + I <sub>IL</sub>	Output Off Current LOW			-650	mA	V <sub>OUT</sub> = 0.5 V	V <sub>CC</sub> = MAX	
I <sub>IH</sub>	Input HIGH Current	OE, T/R Inputs		20	µA	V <sub>IN</sub> = 2.7 V	V <sub>CC</sub> = MAX	
		OE, T/R Inputs		100	µA	V <sub>IN</sub> = 7.0 V		
		A <sub>n</sub> , B <sub>n</sub> Inputs		1.0	mA	V <sub>IN</sub> = 5.5 V		
I <sub>IL</sub>	Input LOW Current	T/R Input		-0.8	mA	V <sub>IN</sub> = 0.5 V	V <sub>CC</sub> = MAX	
		OE Input		-1.2	mA			
I <sub>OS</sub>	Output Short Circuit Current (Note 2)	A <sub>n</sub> Outputs	-60		-150	mA	V <sub>OUT</sub> = GND	V <sub>CC</sub> = MAX
		B <sub>n</sub> Outputs	-100		-225	mA	V <sub>OUT</sub> = GND	V <sub>CC</sub> = MAX
I <sub>CCH</sub>	Power Supply Current HIGH			90	mA	V <sub>CC</sub> = MAX, Outputs HIGH		
I <sub>CCL</sub>	Power Supply Current LOW			120	mA	V <sub>CC</sub> = MAX, Outputs LOW		
I <sub>CCZ</sub>	Power Supply Current OFF			110	mA	V <sub>CC</sub> = MAX, Outputs OFF		

### NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.
- Not more than one output should be shorted at a time.

## AC CHARACTERISTICS

Symbol	Parameter	54/74F		54F		74F		Unit	
		T <sub>A</sub> = +25°C V <sub>CC</sub> = +5.0 V C <sub>L</sub> = 50 pF		T <sub>A</sub> = -55°C to +125°C V <sub>CC</sub> = 5.0 V ± 10% C <sub>L</sub> = 50 pF		T <sub>A</sub> = 0°C to +70°C V <sub>CC</sub> = 5.0 V ± 10% C <sub>L</sub> = 50 pF			
		Min	Max	Min	Max	Min	Max		
		2.5	6.0	2.5	8.0	2.5	7.0		
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay A <sub>n</sub> to B <sub>n</sub> or B <sub>n</sub> to A <sub>n</sub>	2.5	6.0	2.5	8.0	2.5	7.0	ns	
t <sub>PZH</sub> t <sub>PZL</sub>	Output Enable Time	3.0 3.5	7.0 8.0	3.0 3.5	9.0 10	3.0 3.5	8.0 9.0	ns	
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output Disable Time	2.5 2.0	6.5 6.5	2.5 2.0	8.5 8.5	2.5 2.0	7.5 7.5	ns	