

M2001 Series

5x7 mm, 3.3 Volt, CMOS/LVPECL/LVDS, Clock Oscillator



- Low cost oscillator series with jitter performance optimized specifically for Fibre Channel applications. CMOS, LVPECL, and LVDS versions available.
- Ideal for Fibre Channel, Storage Area Networks (SAN), and HDD Control

| Ordering Information | | M2001 1 5 T L N 00.0000 MHz | | | | | | |
|--------------------------------|--|-----------------------------|---|---|---|---|-------------|--|
| Product Series | M2001 | 1 | 5 | T | L | N | 00.0000 MHz | |
| Temperature Range | 1: 0°C to +70°C 2: -40°C to +85°C 6: -20°C to +70°C 7: -0°C to +85°C 8: 0°C to +50°C | | | | | | | |
| Stability | 3: ±100 ppm 4: ±50 ppm 6: ±25 ppm 5: ±35 ppm | | | | | | | |
| Output Type | F: Fixed T: Tristate | | | | | | | |
| Symmetry/Output Logic Type | C: 45/55% CMOS L: 45/55% LVDS P: 45/55% PECL | | | | | | | |
| Package/Lead Configurations | N: Leadless Ceramic | | | | | | | |
| Frequency (customer specified) | | | | | | | | |

| PARAMETER | Symbol | Min. | Typ. | Max. | Units | Condition/Notes |
|--|----------------------------------|--|-------------|---|----------------|--|
| Frequency Range | F | 53.125 | | 125 | MHz | CMOS |
| | | 53.125 | | 156.25 | MHz | PECL/LVDS |
| Operating Temperature | T _A | (See Ordering Information) | | | | |
| Storage Temperature | T _S | -55 | | +125 | °C | |
| Frequency Stability | ΔF/F | (See Ordering Information) | | | | |
| Aging | | | | | | See Note 1 |
| 1st Year | | | ±2 | | ppm | |
| Thereafter (per year) | | | ±1 | | ppm | |
| Input Voltage | V _{CC} /V _{DD} | 3.135 | 3.3 | 3.465 | V | |
| Input Current | V _{DD} /I _{DD} | | | 60 | mA | CMOS/LVDS |
| | | | | 100 | mA | PECL |
| Output Type | | | | | | CMOS/PECL/LVDS |
| Load | | 15 pF 50 Ohms to V _{CC} -2 VDC 100 Ohm differential load | | | | CMOS (See Note 2) PECL (See Note 3) LVDS (See Note 4) |
| Symmetry (Duty Cycle) (Per Symmetry Code) | | 45 | 50 | 55 | % | 50% V _{DD} (CMOS) V _{CC} -1.3 VDC (PECL) 1.25 VDC (LVDS) |
| Output Skew | | | | 200 | ps | PECL |
| Differential Voltage | V _O | 250 | 340 | 450 | mV | LVDS |
| Logic "1" Level | V _{OH} | 90% V _{DD} V _{CC} -1.02 1.375 | | | V V V | CMOS PECL LVDS |
| Logic "0" Level | V _{OL} | | | 10% V _{DD} V _{CC} -1.63 1.125 | V V V | CMOS PECL LVDS |
| Output Current | | -4 | | +4 | mA | CMOS |
| Rise/Fall Time | T _r /T _f | | 0.35 .50 | 3 0.55 1.0 | ns ns ns | CMOS @ 20/80% LVPECL @ 20/80% LVDS @ 20/80% |
| Tristate Function | | 80% V _{DD} min or floating: output active 20% V _{DD} max: output disables to high-Z | | | | |
| Start up Time | | 5 ms | | | | |
| Peak to Peak Jitter (+/-) | T _J | | 10 15 | 15 20 | ps ps | @ BER 1E-12 (See Note 5) CMOS PECL/LVDS |

1. Inclusive of initial tolerance, deviation over temperature, shock, vibration, voltage, and aging.
2. See load circuit diagram #2.
3. See load circuit diagram #5.
4. See load circuit diagram #9.
5. See jitter test circuit in Figure 1.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.


Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

M2001 Series

5x7 mm, 3.3 Volt, CMOS/LVPECL/LVDS, Clock Oscillator



CMOS Output

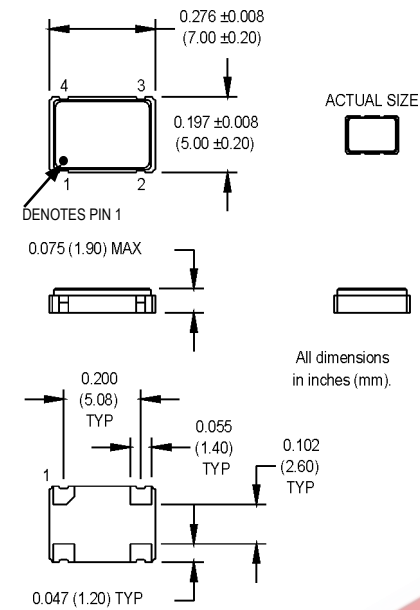


All dimensions in inches (mm).

Pin Connections

| PIN | FUNCTION |
|-----|-------------|
| 1 | Tristate/NC |
| 2 | Ground |
| 3 | Output |
| 4 | +Vdd |

LVPECL/LVDS Output

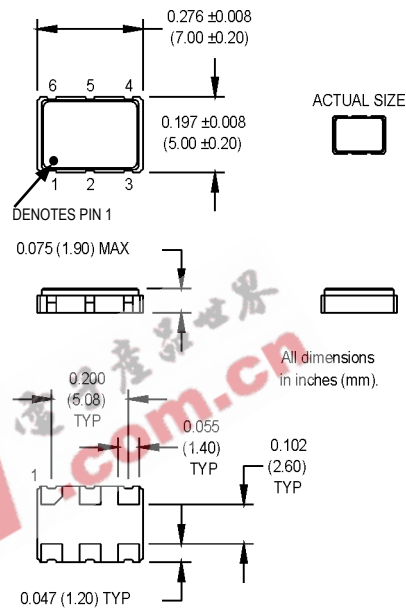


All dimensions in inches (mm).

Pin Connections

| PIN | FUNCTION |
|-----|--------------------|
| 1 | Tristate |
| 2 | N/C |
| 3 | Ground |
| 4 | Output1/ Q |
| 5 | Output2/ \bar{Q} |
| 6 | +Vdd |

Figure 1

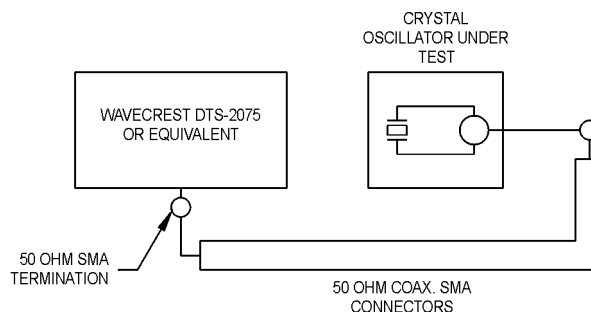

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

MtronPTI Lead Free Solder Profile

