


# SN54ABT16241A, SN74ABT16241A 16-BIT BUFFERS/DRIVERS WITH 3-STATE OUTPUTS

SCBS096G – FEBRUARY 1991 – REVISED OCTOBER 1998

- Members of the Texas Instruments *Widebus*™ Family
- State-of-the-Art *EPIC-II*™ BiCMOS Design Significantly Reduces Power Dissipation
- Typical  $V_{OLP}$  (Output Ground Bounce) < 1 V at  $V_{CC} = 5$  V,  $T_A = 25^\circ\text{C}$
- Distributed  $V_{CC}$  and GND Pin Configuration Minimizes High-Speed Switching Noise
- Flow-Through Architecture Optimizes PCB Layout
- High-Drive Outputs ( $-32\text{-mA } I_{OH}$ ,  $64\text{-mA } I_{OL}$ )
- Latch-Up Performance Exceeds 500 mA Per JESD 17
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model ( $C = 200$  pF,  $R = 0$ )
- Package Options Include Plastic 300-mil Shrink Small-Outline (DL), Thin Shrink Small-Outline (DGG), and Thin Very Small-Outline (DGV) Packages and 380-mil Fine-Pitch Ceramic Flat (WD) Package Using 25-mil Center-to-Center Spacings

SN54ABT16241A . . . WD PACKAGE  
SN74ABT16241A . . . DGG, DGV, OR DL PACKAGE  
(TOP VIEW)

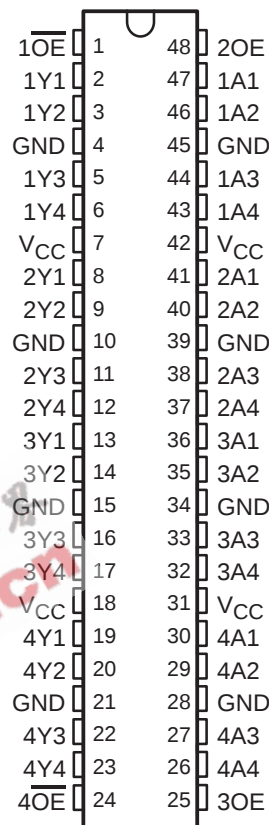

## description

The 'ABT16241A devices are 16-bit buffers and line drivers designed specifically to improve both the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.

These devices can be used as four 4-bit buffers, two 8-bit buffers, or one 16-bit buffer. These devices provide true outputs and complementary output-enable (OE and  $\overline{OE}$ ) inputs.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver. OE should be tied to GND through a pulldown resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.

The SN54ABT16241A is characterized for operation over the full military temperature range of  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ . The SN74ABT16241A is characterized for operation from  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus and EPIC-II are trademarks of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

SCBS096G – FEBRUARY 1991 – REVISED OCTOBER 1998

| INPUTS   |        | OUTPUTS<br>1Y, 4Y |
|----------|--------|-------------------|
| 1OE, 4OE | 1A, 4A |                   |
| L        | H      | H                 |
| L        | L      | L                 |
| H        | X      | Z                 |

logic symbol<sup>†</sup>




# SN54ABT16241A, SN74ABT16241A

## 16-BIT BUFFERS/DRIVERS

### WITH 3-STATE OUTPUTS

SCBS096G – FEBRUARY 1991 – REVISED OCTOBER 1998

#### logic diagram (positive logic)

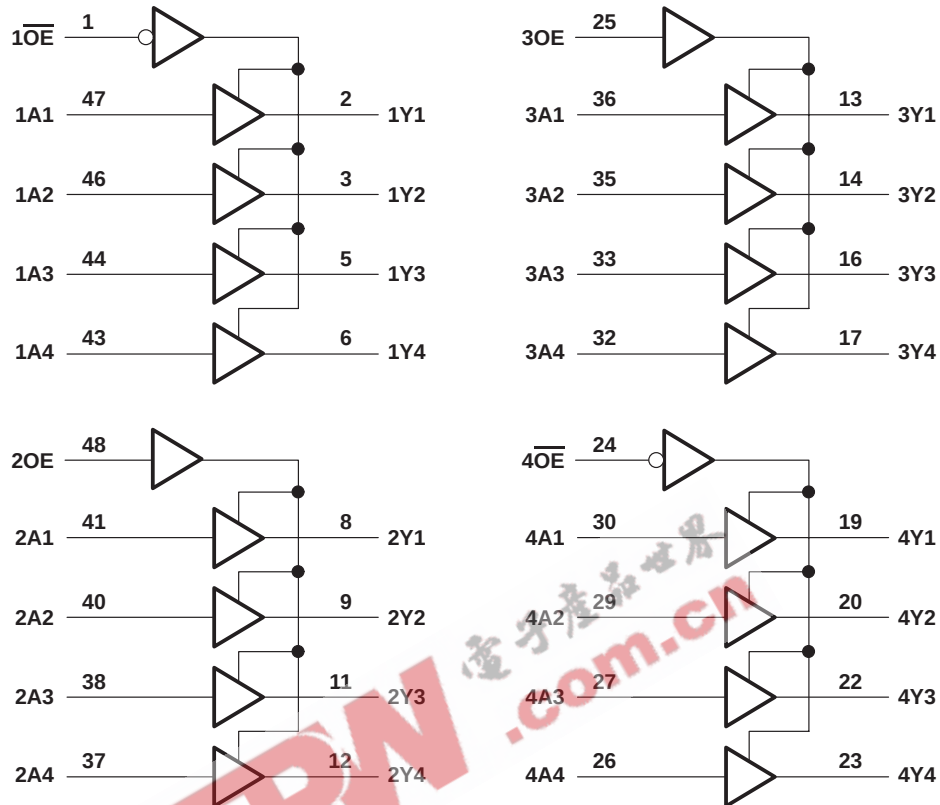

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                           |                 |
|---------------------------------------------------------------------------|-----------------|
| Supply voltage range, $V_{CC}$                                            | –0.5 V to 7 V   |
| Input voltage range, $V_I$ (see Note 1)                                   | –0.5 V to 7 V   |
| Voltage range applied to any output in the high or power-off state, $V_O$ | –0.5 V to 5.5 V |
| Current into any output in the low state, $I_O$ : SN54ABT16241A           | 96 mA           |
| SN74ABT16241A                                                             | 128 mA          |
| Input clamp current, $I_{IK}$ ( $V_I < 0$ )                               | –18 mA          |
| Output clamp current, $I_{OK}$ ( $V_O < 0$ )                              | –50 mA          |
| Package thermal impedance, $\theta_{JA}$ (see Note 2): DGG package        | 89°C/W          |
| DGV package                                                               | 93°C/W          |
| DL package                                                                | 94°C/W          |
| Storage temperature range, $T_{stg}$                                      | –65°C to 150°C  |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.  
2. The package thermal impedance is calculated in accordance with JESD 51.

# SN54ABT16241A, SN74ABT16241A

## 16-BIT BUFFERS/DRIVERS

### WITH 3-STATE OUTPUTS

SCBS096G – FEBRUARY 1991 – REVISED OCTOBER 1998

#### recommended operating conditions (see Note 3)

|                 |                                    | SN54ABT16241A   |                 | SN74ABT16241A |                 | UNIT |
|-----------------|------------------------------------|-----------------|-----------------|---------------|-----------------|------|
|                 |                                    | MIN             | MAX             | MIN           | MAX             |      |
| V <sub>CC</sub> | Supply voltage                     | 4.5             | 5.5             | 4.5           | 5.5             | V    |
| V <sub>IH</sub> | High-level input voltage           | 2               |                 | 2             |                 | V    |
| V <sub>IL</sub> | Low-level input voltage            |                 | 0.8             |               | 0.8             | V    |
| V <sub>I</sub>  | Input voltage                      | 0               | V <sub>CC</sub> | 0             | V <sub>CC</sub> | V    |
| I <sub>OH</sub> | High-level output current          |                 | –24             |               | –32             | mA   |
| I <sub>OL</sub> | Low-level output current           |                 | 48              |               | 64              | mA   |
| Δt/Δv           | Input transition rise or fall rate | Outputs enabled |                 |               | 10              | ns/V |
| T <sub>A</sub>  | Operating free-air temperature     | –55             | 125             | –40           | 85              | °C   |

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER          |                | TEST CONDITIONS                                                                                       | T <sub>A</sub> = 25°C |      |       | SN54ABT16241A |      | SN74ABT16241A |      | UNIT |
|--------------------|----------------|-------------------------------------------------------------------------------------------------------|-----------------------|------|-------|---------------|------|---------------|------|------|
|                    |                |                                                                                                       | MIN                   | TYP† | MAX   | MIN           | MAX  | MIN           | MAX  |      |
| V <sub>IK</sub>    |                | V <sub>CC</sub> = 4.5 V, I <sub>I</sub> = –18 mA                                                      |                       |      | –1.2  |               | –1.2 |               | –1.2 | V    |
| V <sub>OH</sub>    |                | V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = –3 mA                                                      | 2.5                   |      |       | 2.5           |      | 2.5           |      | V    |
|                    |                | V <sub>CC</sub> = 5 V, I <sub>OH</sub> = –3 mA                                                        | 3                     |      |       | 3             |      | 3             |      |      |
|                    |                | V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = –24 mA                                                     | 2                     |      |       | 2             |      |               |      |      |
|                    |                | V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = –32 mA                                                     | 2*                    |      |       |               |      | 2             |      |      |
| V <sub>OL</sub>    |                | V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 48 mA                                                      |                       |      | 0.55  |               | 0.55 |               |      | V    |
|                    |                | V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 64 mA                                                      |                       |      | 0.55* |               |      |               | 0.55 |      |
| V <sub>hys</sub>   |                |                                                                                                       |                       | 100  |       |               |      |               |      | mV   |
| I <sub>I</sub>     |                | V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = V <sub>CC</sub> or GND                                      |                       |      | ±1    |               | ±1   |               | ±1   | μA   |
| I <sub>OZH</sub>   |                | V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.7 V                                                       |                       |      | 10    |               | 10   |               | 10   | μA   |
| I <sub>OZL</sub>   |                | V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 0.5 V                                                       |                       |      | –10   |               | –10  |               | –10  | μA   |
| I <sub>off</sub>   |                | V <sub>CC</sub> = 0, V <sub>I</sub> or V <sub>O</sub> ≤ 4.5 V                                         |                       |      | ±100  |               |      |               | ±100 | μA   |
| I <sub>CEX</sub>   |                | V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 5.5 V, Outputs high                                         |                       |      | 50    |               | 50   |               | 50   | μA   |
| I <sub>O</sub> ‡   |                | V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.5 V                                                       | –50                   | –100 | –180  | –50           | –180 | –50           | –180 | mA   |
| I <sub>CC</sub>    |                | V <sub>CC</sub> = 5.5 V, I <sub>O</sub> = 0, Outputs high                                             |                       |      | 3     |               | 3    |               | 3    | mA   |
|                    |                | V <sub>CC</sub> = 5.5 V, I <sub>O</sub> = 0, Outputs low                                              |                       |      | 34    |               | 34   |               | 34   |      |
|                    |                | V <sub>CC</sub> = 5.5 V, I <sub>O</sub> = 0, Outputs disabled                                         |                       |      | 3     |               | 3    |               | 3    |      |
| ΔI <sub>CC</sub> § | Data inputs    | V <sub>CC</sub> = 5.5 V, One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND, Outputs enabled  |                       |      | 1     |               | 1.5  |               | 1    | mA   |
|                    |                | V <sub>CC</sub> = 5.5 V, One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND, Outputs disabled |                       |      | 0.05  |               | 1    |               | 0.05 |      |
|                    | Control inputs | V <sub>CC</sub> = 5.5 V, One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND                   |                       |      | 1.5   |               | 1.5  |               | 1.5  |      |
| C <sub>i</sub>     |                | V <sub>I</sub> = 2.5 V or 0.5 V                                                                       |                       |      | 3.5   |               |      |               |      | pF   |
| C <sub>O</sub>     |                | V <sub>O</sub> = 2.5 V or 0.5 V                                                                       |                       |      | 7.5   |               |      |               |      | pF   |

\* On products compliant to MIL-PRF-38535, this parameter does not apply.

† All typical values are at V<sub>CC</sub> = 5 V.

‡ Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

§ This is the increase in supply current for each input that is at the specified TTL voltage level rather than V<sub>CC</sub> or GND.

**SN54ABT16241A, SN74ABT16241A**  
**16-BIT BUFFERS/DRIVERS**  
**WITH 3-STATE OUTPUTS**

SCBS096G – FEBRUARY 1991 – REVISED OCTOBER 1998

switching characteristics over recommended ranges of supply voltage and operating free-air temperature,  $C_L = 50$  pF (unless otherwise noted) (see Figure 1)

| PARAMETER        | FROM<br>(INPUT)       | TO<br>(OUTPUT) | SN54ABT16241A                                   |     |     |     |     | UNIT |
|------------------|-----------------------|----------------|-------------------------------------------------|-----|-----|-----|-----|------|
|                  |                       |                | V <sub>CC</sub> = 5 V,<br>T <sub>A</sub> = 25°C |     |     | MIN | MAX |      |
|                  |                       |                | MIN                                             | TYP | MAX |     |     |      |
| t <sub>PLH</sub> | A                     | Y              | 0.9                                             | 2.7 | 3.4 | 0.9 | 3.8 | ns   |
| t <sub>PHL</sub> |                       |                | 0.9                                             | 2.7 | 3.9 | 0.9 | 4.6 |      |
| t <sub>PZH</sub> | OE or $\overline{OE}$ | Y              | 1.2                                             | 3.3 | 4.2 | 1.2 | 5.1 | ns   |
| t <sub>PZL</sub> |                       |                | 1.3                                             | 3.4 | 5.9 | 1.3 | 7   |      |
| t <sub>PHZ</sub> | OE or $\overline{OE}$ | Y              | 1.5                                             | 4.1 | 5.5 | 1.5 | 7   | ns   |
| t <sub>PLZ</sub> |                       |                | 1.7                                             | 3.6 | 5.1 | 1.7 | 5.7 |      |


switching characteristics over recommended ranges of supply voltage and operating free-air temperature,  $C_L = 50$  pF (unless otherwise noted) (see Figure 1)

| PARAMETER | FROM<br>(INPUT)       | TO<br>(OUTPUT) | SN74ABT16241A                                        |     |     |     |     | UNIT |
|-----------|-----------------------|----------------|------------------------------------------------------|-----|-----|-----|-----|------|
|           |                       |                | $V_{CC} = 5\text{ V},$<br>$T_A = 25^{\circ}\text{C}$ |     |     | MIN | MAX |      |
|           |                       |                | MIN                                                  | TYP | MAX |     |     |      |
| $t_{PLH}$ | A                     | Y              | 1                                                    | 2.7 | 3.4 | 1   | 3.7 | ns   |
| $t_{PHL}$ |                       |                | 1                                                    | 2.7 | 3.9 | 1   | 4.5 |      |
| $t_{PZH}$ | OE or $\overline{OE}$ | Y              | 1.2                                                  | 3.3 | 4.2 | 1.2 | 5   | ns   |
| $t_{PZL}$ |                       |                | 1.3                                                  | 3.4 | 5.9 | 1.3 | 6.9 |      |
| $t_{PHZ}$ | OE or $\overline{OE}$ | Y              | 1.5                                                  | 4.1 | 5.2 | 1.5 | 6.2 | ns   |
| $t_{PLZ}$ |                       |                | 1.7                                                  | 3.6 | 5.1 | 1.7 | 5.6 |      |

# SN54ABT16241A, SN74ABT16241A 16-BIT BUFFERS/DRIVERS WITH 3-STATE OUTPUTS


SCBS096G – FEBRUARY 1991 – REVISED OCTOBER 1998

## PARAMETER MEASUREMENT INFORMATION

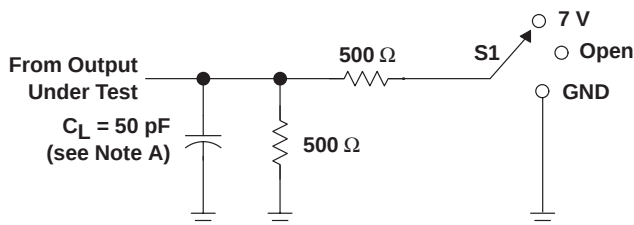


| TEST              | S1   |
|-------------------|------|
| $t_{PLH}/t_{PHL}$ | Open |
| $t_{PLZ}/t_{PZL}$ | 7 V  |
| $t_{PHZ}/t_{PZH}$ | Open |


LOAD CIRCUIT

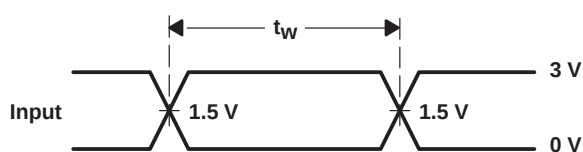


VOLTAGE WAVEFORMS  
PULSE DURATION

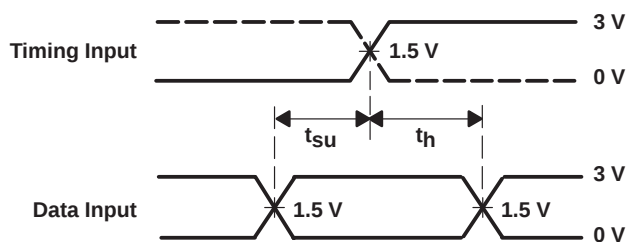

VOLTAGE WAVEFORMS  
SETUP AND HOLD TIMES

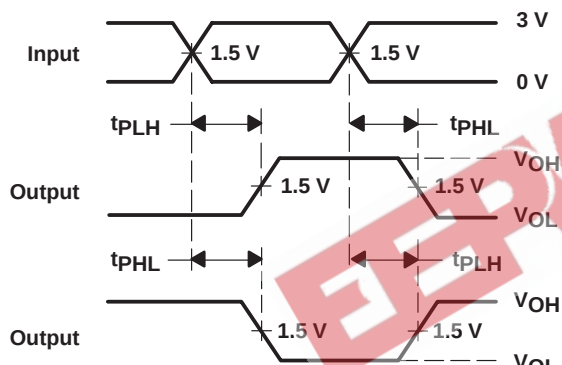

VOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES  
INVERTING AND NONINVERTING OUTPUTS

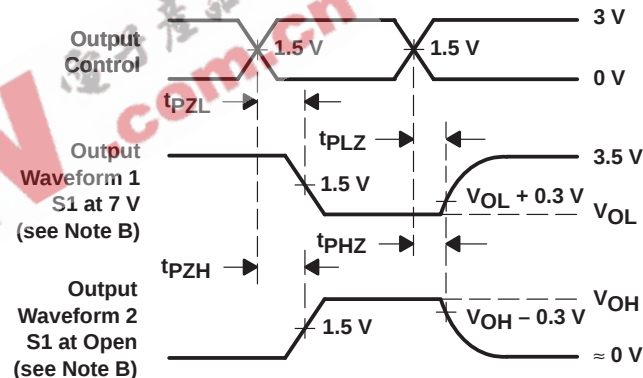

VOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES  
LOW- AND HIGH-LEVEL ENABLING

- NOTES:
- $C_L$  includes probe and jig capacitance.
  - Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r \leq 2.5 \text{ ns}$ ,  $t_f \leq 2.5 \text{ ns}$ .
  - The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

## IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.