



30CPQ080G
 30CPQ090G
 30CPQ100G

SCHOTTKY RECTIFIER

30 Amp

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 80 \text{ to } 100\text{V}$$

Major Ratings and Characteristics

| Characteristics | Values | Units |
|---|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform | 30 | A |
| V_{RRM} | 80 to 100 | V |
| I_{FSM} @ tp = 5 μ s sine | 920 | A |
| V_F @ 15 Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.67 | V |
| T_J | -55 to 175 | $^\circ\text{C}$ |

Description/ Features

The 30CPQ...G center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.


- 175° C T_J operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

30CPQ...G



TO-247AC



Voltage Ratings

| Part number | 30CPQ080G | 30CPQ090G | 30CPQ100G |
|---|-----------|-----------|-----------|
| V_R Max. DC Reverse Voltage (V) | 80 | 90 | 100 |
| V_{RWM} Max. Working Peak Reverse Voltage (V) | | | |

Absolute Maximum Ratings

| Parameters | 30CPQ... | Units | Conditions |
|---|----------|-------|--|
| $I_{F(AV)}$ Max. Average Forward Current * See Fig. 5 | 30 | A | 50% duty cycle @ $T_C = 140^\circ\text{C}$, rectangular wave form |
| I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7 | 920 | A | 5 μ s Sine or 3 μ s Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RRM} applied |
| | 240 | | |
| E_{AS} Non-Repetitive Avalanche Energy (Per Leg) | 7.50 | mJ | $T_J = 25^\circ\text{C}$, $I_{AS} = 0.50$ Amps, $L = 60$ mH |
| I_{AR} Repetitive Avalanche Current (Per Leg) | 0.50 | A | Current decaying linearly to zero in 1 μ sec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical |

Electrical Specifications

| Parameters | 30CPQ... | Units | Conditions |
|--|----------|------------|---|
| V_{FM} Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1) | 0.86 | V | @ 15A $T_J = 25^\circ\text{C}$ |
| | 1.05 | V | @ 30A |
| | 0.67 | V | @ 15A $T_J = 125^\circ\text{C}$ |
| | 0.81 | V | @ 30A |
| I_{RM} Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1) | 0.28 | mA | $T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$ |
| | 7 | mA | $T_J = 125^\circ\text{C}$ |
| C_T Max. Junction Capacitance (Per Leg) | 500 | pF | $V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C |
| L_S Typical Series Inductance (Per Leg) | 7.5 | nH | Measured lead to lead 5mm from package body |
| dv/dt Max. Voltage Rate of Change | 10000 | V/ μ s | (Rated V_R) |

(1) Pulse Width < 300 μ s, Duty Cycle <2%

Thermal-Mechanical Specifications

| Parameters | 30CPQ... | Units | Conditions |
|---|-----------------|---------------------------|--------------------------------------|
| T_J Max. Junction Temperature Range | -55 to 175 | $^\circ\text{C}$ | |
| T_{stg} Max. Storage Temperature Range | -55 to 175 | $^\circ\text{C}$ | |
| R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg) | 2.20 | $^\circ\text{C}/\text{W}$ | DC operation * See Fig. 4 |
| R_{thJC} Max. Thermal Resistance Junction to Case (Per Package) | 1.10 | $^\circ\text{C}/\text{W}$ | DC operation |
| R_{thCS} Typical Thermal Resistance, Case to Heatsink | 0.24 | $^\circ\text{C}/\text{W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight | 6 (0.21) | g (oz.) | |
| T Mounting Torque | Min. 6 (5) | Kg-cm (lbf-in) | Non-lubricated threads |
| | Max. 12 (10) | | |
| Case Style | TO-247AC(TO-3P) | JEDEC | |
| Device Marking | 30CPQ100G | | |

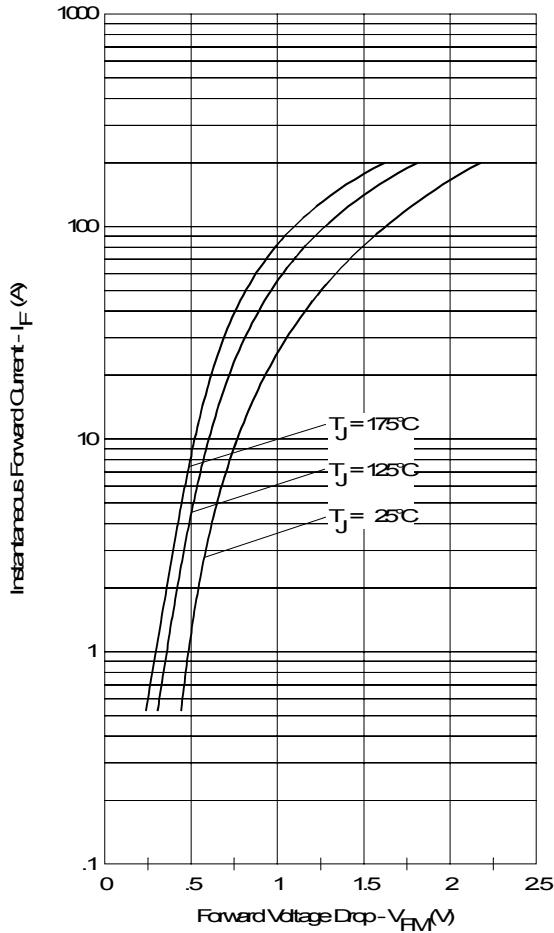


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

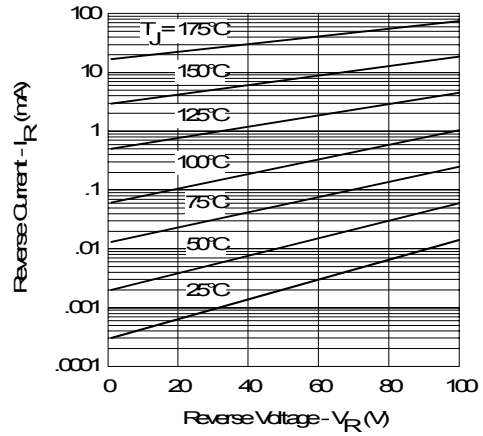


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

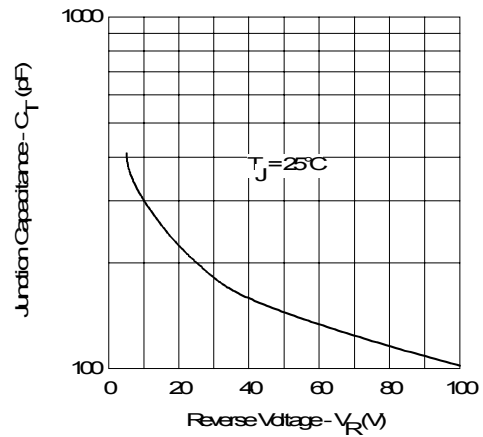


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

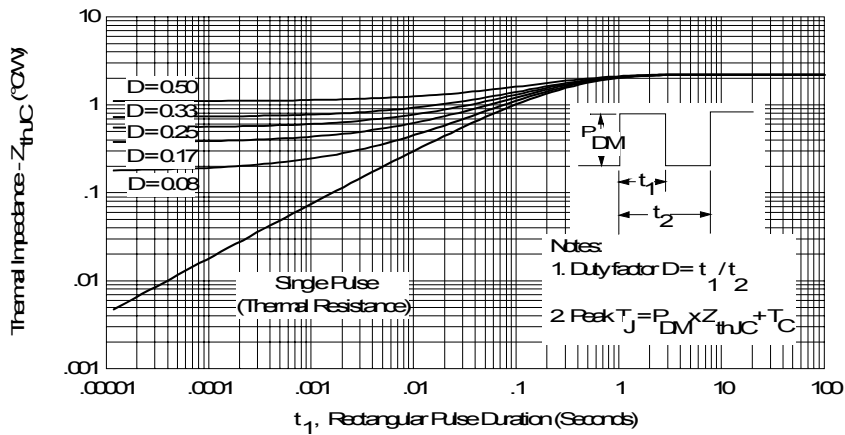


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

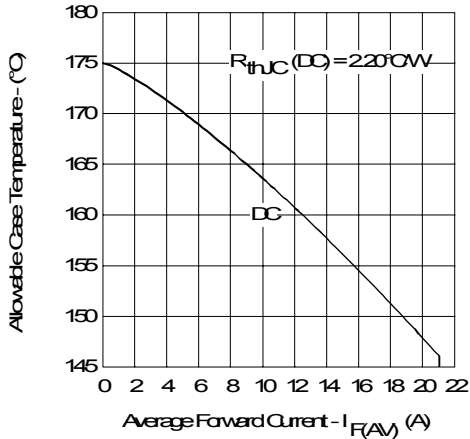


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

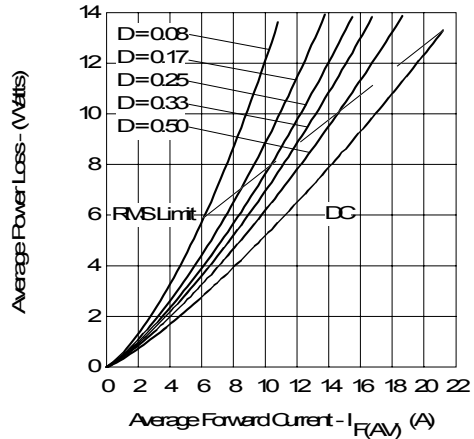


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

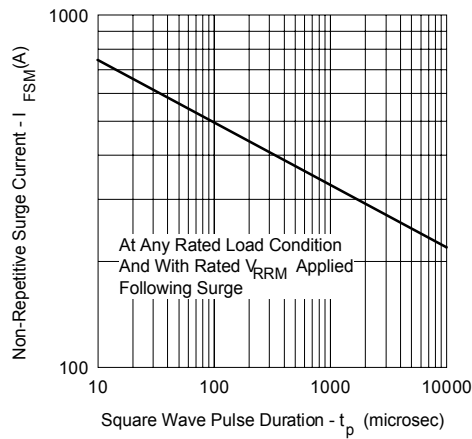


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)



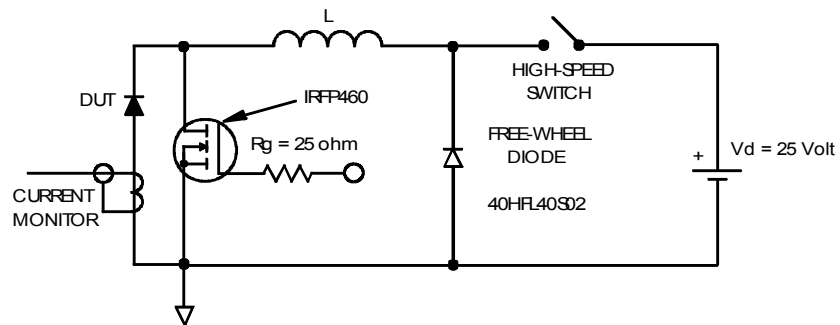


Fig. 8 - Unclamped Inductive Test Circuit

Outline Table

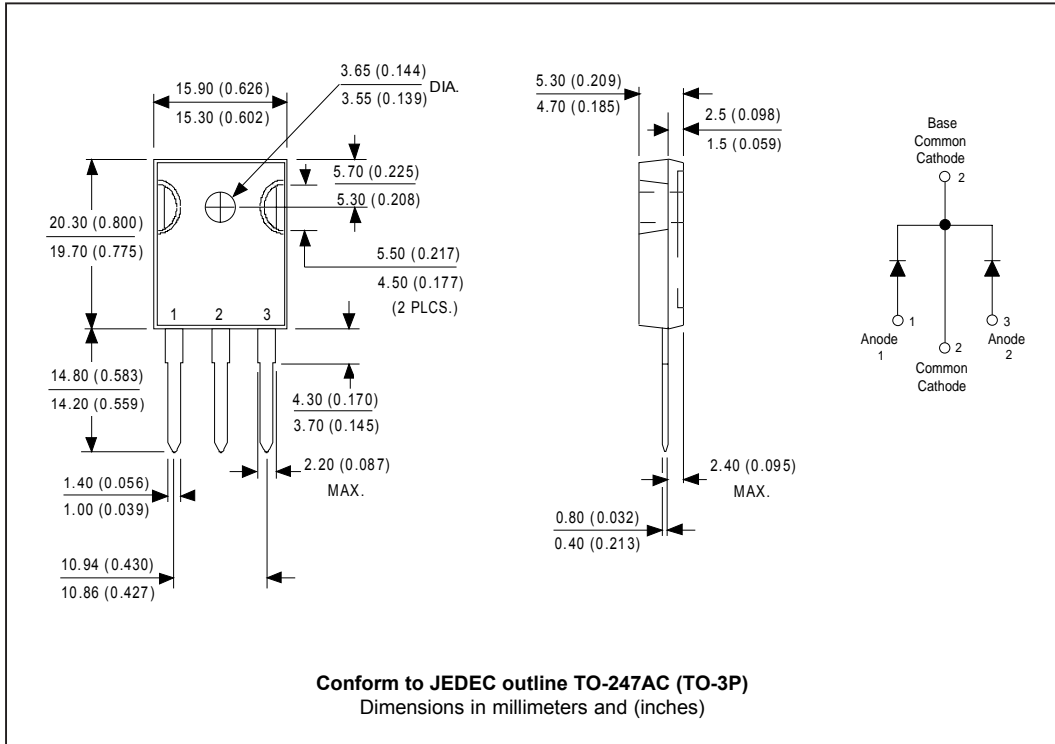

Marking Information

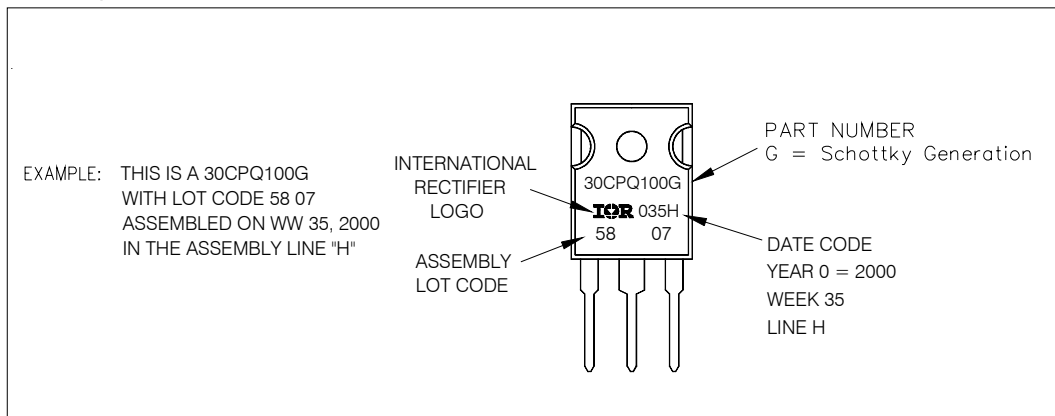

Ordering Information Table

| Device Code | | | | | | | | | |
|---|---|----------|----------|------------|----------|----------|-----------|-----------|------------|
| 30 | C | P | Q | 100 | G | - | | | |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | | | |
| 1 | - Current Rating (30 = 30A) | | | | | | | | |
| 2 | - Circuit Configuration C = Common Cathode | | | | | | | | |
| 3 | - Package P = TO-247 | | | | | | | | |
| 4 | - Schottky "Q" Series | | | | | | | | |
| 5 | - Voltage Code | | | | | | | | |
| 6 | - G = Schottky Generation | | | | | | | | |
| 7 | - • none = Standard Production • PbF = Lead-Free | | | | | | | | |
| <table border="1" style="margin-left: auto;"> <tr> <td>080 = 80V</td> </tr> <tr> <td>090 = 90V</td> </tr> <tr> <td>100 = 100V</td> </tr> </table> | | | | | | | 080 = 80V | 090 = 90V | 100 = 100V |
| 080 = 80V | | | | | | | | | |
| 090 = 90V | | | | | | | | | |
| 100 = 100V | | | | | | | | | |
| Tube Standard Pack Quantity : 25 pieces | | | | | | | | | |

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.