



1. Mechanical Dimensions:

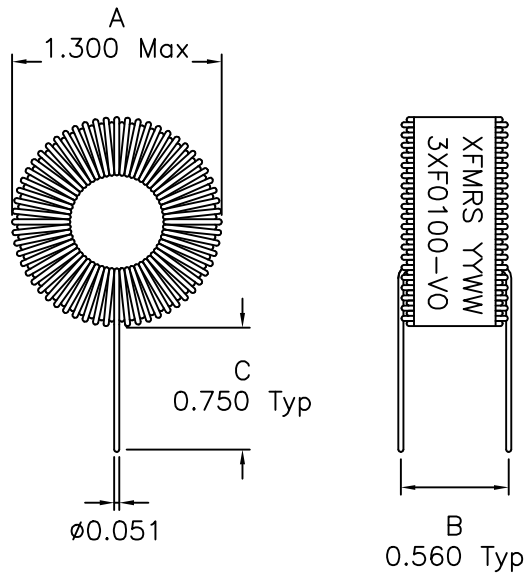

2. Schematic:



3. Electrical Specifications:

Inductance: 100uH $\pm 10\%$ @1.0KHz,1.0V

Current Rating: 5.0ADC

DC Resistance: 0.030 Ohms Max.

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: $> 28\%$,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C
6. the tinned length is the same as the lead length.

DOC. REV. A/1

XFMRS Inc.		Title: Toroid Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in Inch		P/N: 3XF0100-VO	REV. A
		DWN. 李小锋	Jun-07-01
		CHK. 廖玉坤	Jun-07-01
		APP. BW	Jun-07-01
SHEET 1 OF 1			