



1. Mechanical Dimensions:

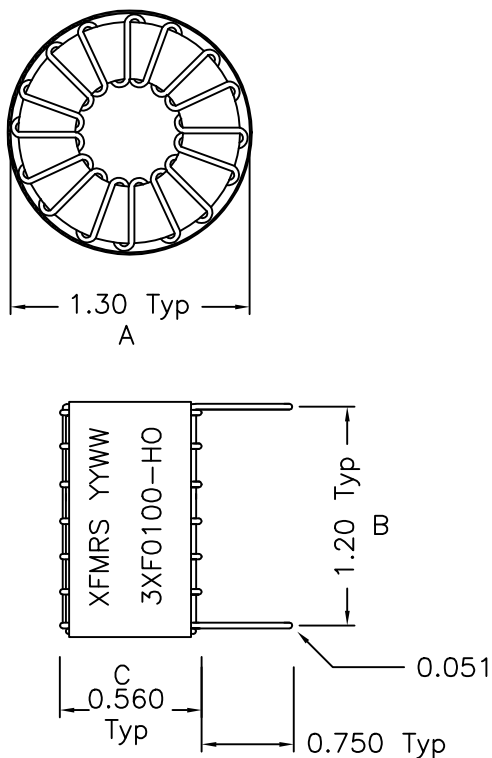

WINDING DETAIL:

STRIP AND TIN TO MOUNT PLAIN
VARNISH REQUIRED

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 100uH $\pm$ 10% @1.0KHz 1.0V

Current Rating: 5.0ADC

DC Resistance: 0.030 Ohms Maximum

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV: A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

XFMRS Inc		Title: HORIZONTAL OPEN TOROID	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx $\pm$ 0.010 Dimensions in INCH	P/N: 3XF0100-HO		REV. A
	DWN.	李小锋	Jun-07-01
	CHK.	廖玉坤	Jun-07-01
	APP.	BW	Jun-07-01

SHEET 1 OF 1