



## 40HF(R) SERIES

### POWER RECTIFIER

Reverse Voltage - 100 to 1600 Volts  
Forward Current - 40.0 Amperes

#### Features

- High surge current capability
- Designed for a wide range of applications
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600V  $V_{RRM}$

#### Typical Applications

- Battery charges
- Converters
- Power supplies
- Machine tool controls



case style  
DO-203AB (DO-5)

#### Mechanical Data

- **Case:** DO-203AB(DO-5)
- **Polarity:** Selection available
- **Weight:** 17 grams

#### Major Ratings and Characteristics

Parameters		40HF(R)		Units
		10 to 120	140 to 160	
$I_{F(AV)}$		40	40	Amps
	@ $T_C$	140	110	$^{\circ}C$
$I_{F(RMS)}$		62		Amps
$I_{FSM}$	@50Hz	570		Amps
	@60Hz	595		Amps
$I^2t$	@50Hz	1600		$A^2s$
	@60Hz	1450		$A^2s$
$V_{RRM}$	range	100 to 1200	1400 to 1600	Volts
$T_J$	range	-65 to 190	-65 to 160	$^{\circ}C$

## ELECTRICAL SPECIFICATIONS

### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ maximum repetitive peak reverse voltage Volts	$V_{RSM}$ maximum non-repetitive peak reverse voltage Volts	$V_{R(BR)}$ minimum avalanche voltage Volts <sup>(1)</sup>	$I_{RRM}$ max. @ $T_j=T_j$ max. mA
40HF(R)	10	100	200	-	15
	20	200	300	-	
	40	400	500	500	
	60	600	720	725	
	80	800	960	950	9
	100	1000	1200	1150	
	120	1200	1440	1350	
	140	1400	1650	1550	
160	1600	1900	1750	4.5	

(1) Avalanche version only available from  $V_{RRM}$  400V to 1600V.

### Forward Conduction

Parameter		40HF(R)		Units	Conditions		
		10 to 120	140 to 160				
$I_{F(AV)}$	Max. average forward current @ Case temperature	40	40	Amps	180° conduction, half sine wave		
		140	110	°C			
$I_{F(RMS)}$	Max. RMS forward current	62		Amps			
$I_{FSM}$	Max. peak, one-cycle forward, non-repetitive surge current	570		Amps	t=10ms	No voltage reapplied	Sinusoidal half wave Initial $T_j=T_j$ max.
		595			t=8.3ms		
		480			t=10ms	100% $V_{RRM}$ reapplied	
		500			t=8.3ms		
$I^2t$	Maximum $I^2t$ for fusing	1600		A <sup>2</sup> S	t=10ms	No voltage reapplied	
		1450			t=8.3s		
		1150			t=10ms	100% $V_{RRM}$ reapplied	
		1050			t=8.3ms		
$V_{FM}$	Max. forward voltage drop	1.30		Volts	$I_{pk}=125A, T_j=25^\circ C, t_p=400\mu s$ rectangular wave		

### Thermal and Mechanical Specifications


Parameter	40HF(R)		Units	Conditions
	10 to 120	140 to 160		
T <sub>J</sub> Max. junction operating temperature range	-65 to 190	-65 to 160	°C	
T <sub>stg</sub> Max. storage temperature range	-65 to 190	-65 to 160		
R <sub>thJC</sub> Max. thermal resistance, junction to case	1.0		K/W	DC operation
R <sub>thCS</sub> Max. thermal resistance, case to heatsink	0.25			Mounting surface, smooth, flat and greased
T Max. allowed mounting torque 10%	2.3-2.4		Nm	Not lubricated threads
	20-30		lbf-in	
wt approximate weight	17 (0.6)		g(oz)	
Case style	DO-203AB (DO-5)			See Outline Table

### Ordering information Table

Device Code:  $\frac{40}{1}$   $\frac{HF}{2}$   $\frac{R}{3}$   $\frac{160}{4}$   $\frac{M}{5}$

1. 40 - Standard device
2. HF - Standard diode
3. None - stud normal polarity (cathode to stud)  
R - stud reverse polarity (Anode to stud)
4. Voltage code: code x 10 = V<sub>RRM</sub>
5. None - stud base DO-203AB (DO-5) 1/4" 28 UNF-2A  
M - stud base DO-203AB (DO-5) M6x1

### Outlines Table

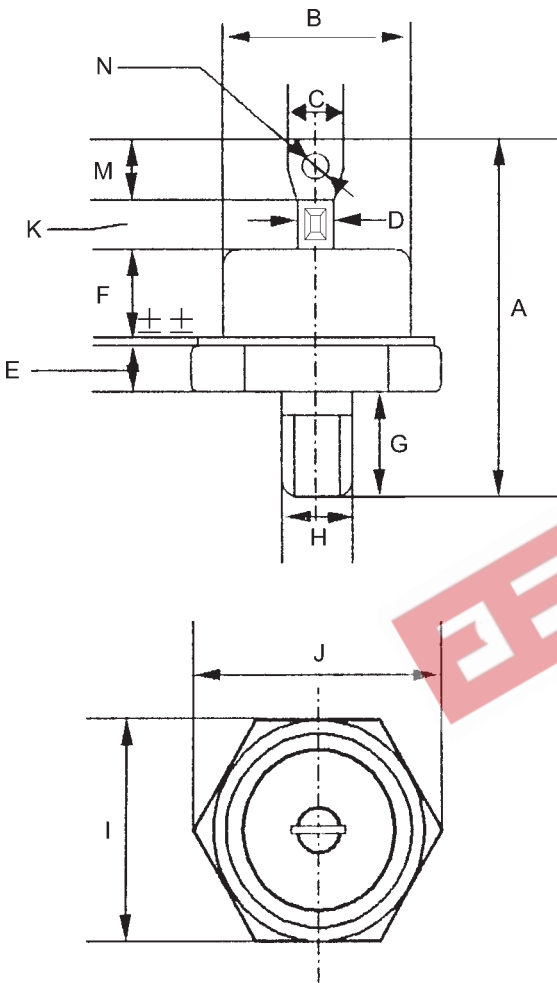

### 40HF(R)

Case Style DO-203AB(DO-5)

All dimensions in millimeters(inches)

DIMENSIONS			
DIM	Inches	mm	Note
A		34.06	
B		12.83	
C		6.48	
D		3.68	
E		3.30	
F		5.92	
G		11.10	
H		5.84	
I		17.27	
J		19.05	
K		5.38	
M		7.42	
N		φ3.8	

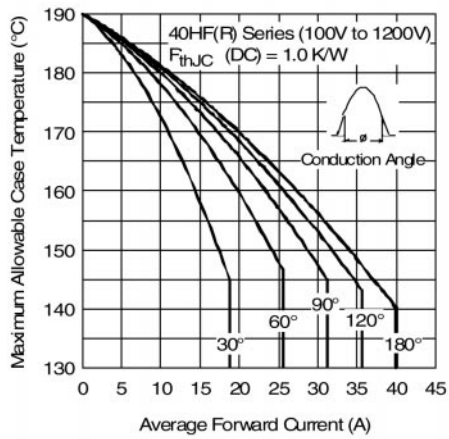


Fig. 1 - Current Ratings Characteristics

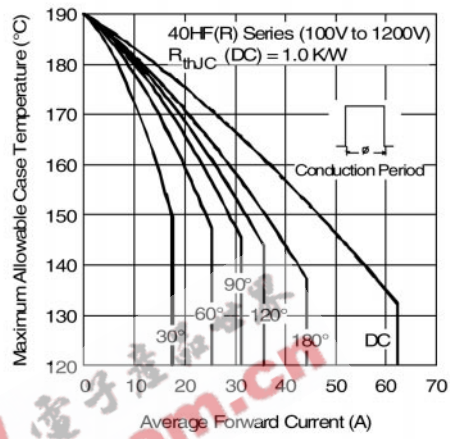


Fig. 2 - Current Ratings Characteristics

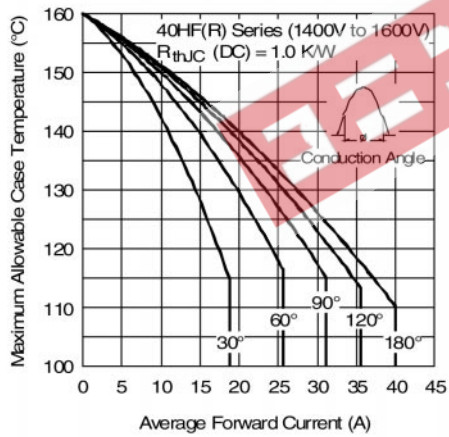


Fig. 3 - Current Ratings Characteristics

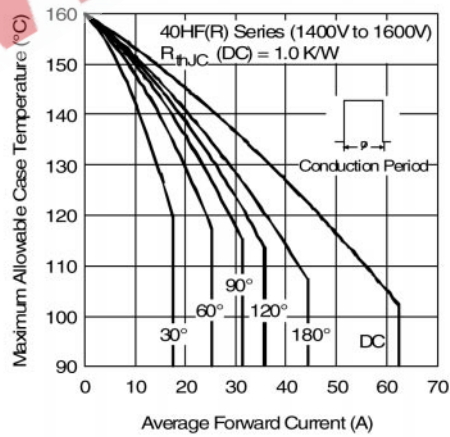


Fig. 4 - Current Ratings Characteristics

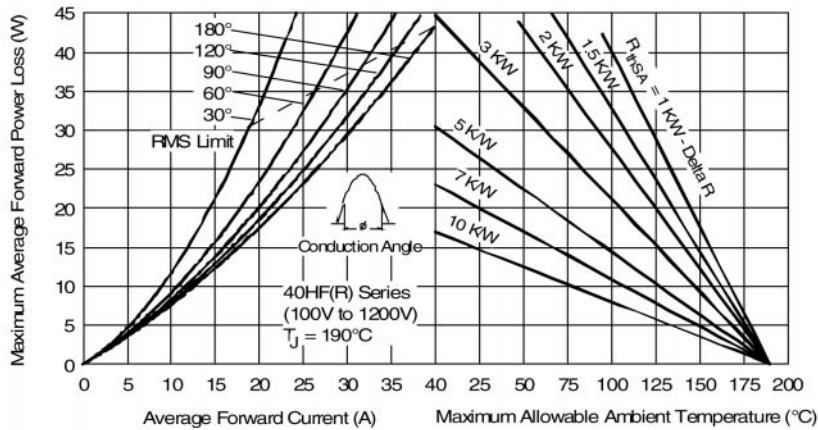


Fig. 5 - Forward Power Loss Characteristics

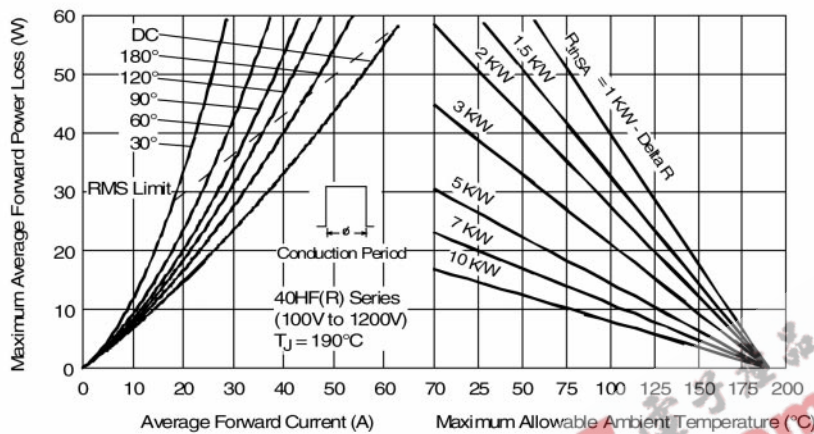


Fig. 6 - Forward Power Loss Characteristics

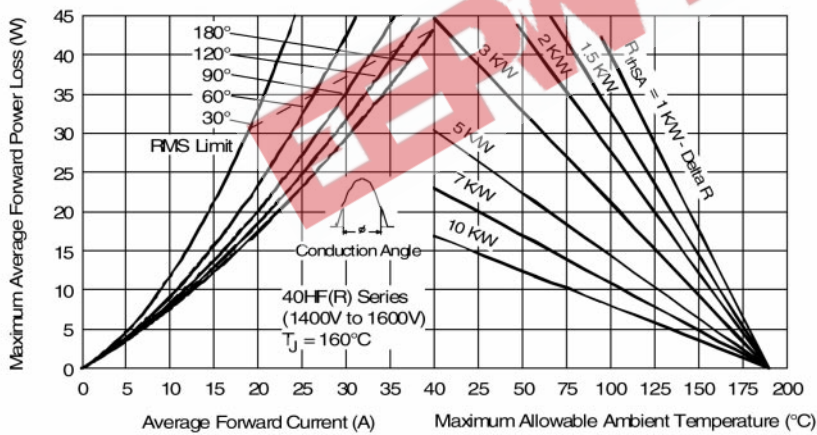


Fig. 7 - Forward Power Loss Characteristics

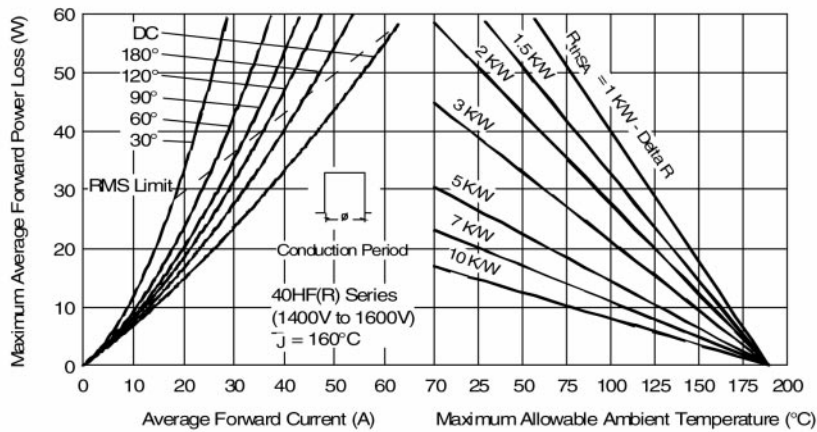


Fig. 8 - Forward Power Loss Characteristics

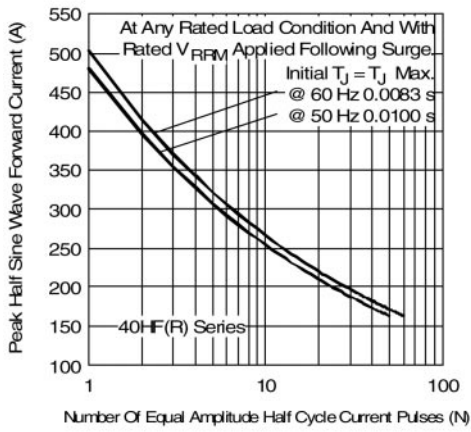


Fig. 9 - Maximum Non-Repetitive Surge Current

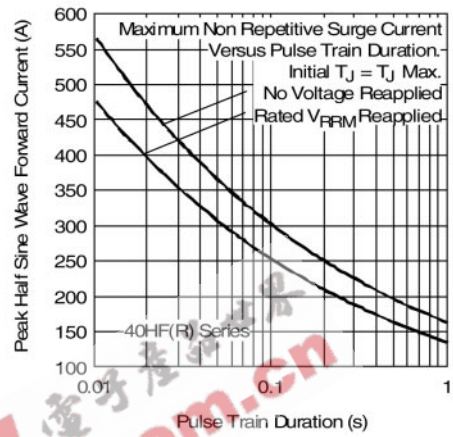


Fig. 10 - Maximum Non-Repetitive Surge Current

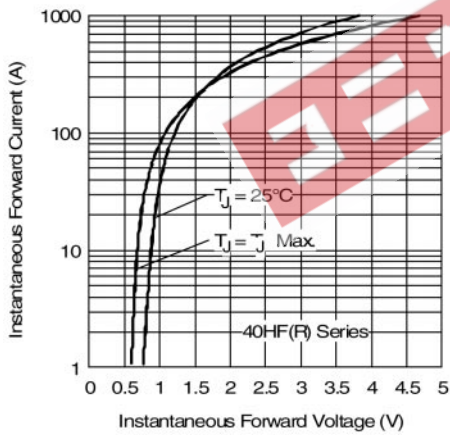


Fig. 11 - Forward Voltage Drop Characteristics

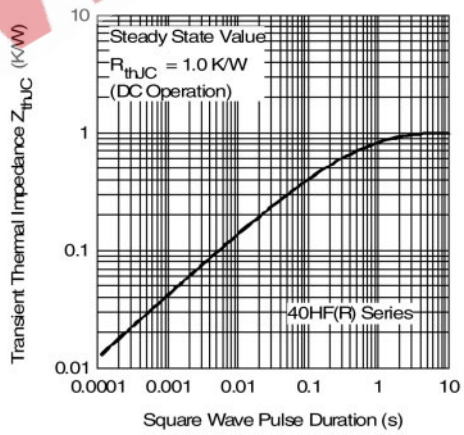


Fig. 12 - Thermal Impedance  $Z_{thJC}$  Characteristics