
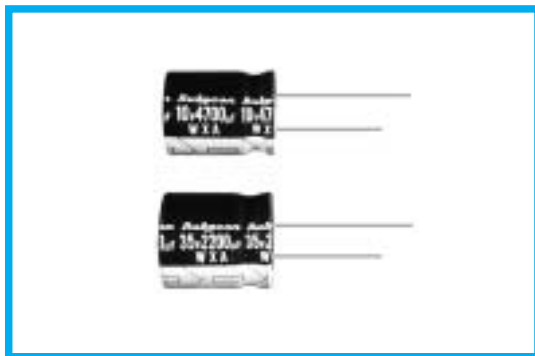


**WXA SERIES**
**105°C Miniaturized low profile.**
**◆ FEATURES**

- 9~25mm height.
- RoHS compliance.

**WXA**

**YXG**

**◆ SPECIFICATIONS**

Items	Characteristics																																																	
	−55~+105°C	−40~+105°C	−25~+105°C																																															
Category Temperature Range	−55~+105°C	−40~+105°C	−25~+105°C																																															
Rated Voltage Range	6.3~50V.DC	160~250V.DC	350~450V.DC																																															
Capacitance Tolerance	±20%(20°C, 120Hz)																																																	
Leakage Current(MAX)	6.3~50V.DC	160~450V.DC																																																
	$I=0.01CV$ or $3\mu A$ whichever is greater. (After 2 minutes application of rated voltage)	$CV \leq 1000$ $I=0.1CV+40\mu A$ (1 minute) $I=0.03CV+15\mu A$ (5 minutes)	$CV > 1000$ $I=0.04CV+100\mu A$ (1 minute) $I=0.02CV+25\mu A$ (5 minutes)																																															
		$I$ =Leakage Current( $\mu A$ )	$C$ =Rated Capacitance( $\mu F$ )	$V$ =Rated Voltage(V)																																														
Dissipation Factor(MAX) (tan $\delta$ )	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td><math>\phi 8, \phi 10</math></td> <td>0.30</td> <td>0.26</td> <td>0.20</td> <td>0.18</td> <td>0.14</td> <td>0.12</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> </tr> <tr> <td><math>\phi 12.5 \sim \phi 18</math></td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> </tr> </tbody> </table> (20°C, 120Hz)											Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450	$\phi 8, \phi 10$	0.30	0.26	0.20	0.18	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25	$\phi 12.5 \sim \phi 18$	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25
	Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450																																					
$\phi 8, \phi 10$	0.30	0.26	0.20	0.18	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25																																						
$\phi 12.5 \sim \phi 18$	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.20	0.25																																						
When rated capacitance is over 1000 $\mu F$ , tan $\delta$ shall be added 0.02 to the listed value with increase of every 1000 $\mu F$ .																																																		
Endurance	After applying rated voltage with rated ripple current for 2000hrs at 105°C, the capacitors shall meet the following requirements.																																																	
	Capacitance Change		Within $\pm 25\%$ of the initial value.																																															
	Dissipation Factor		Not more than 200% of the specified value.																																															
	Leakage Current		Not more than the specified value.																																															
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td><math>Z(-25^\circ C)/Z(20^\circ C)</math></td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> <td>6</td> </tr> <tr> <td><math>Z(-40^\circ C)/Z(20^\circ C)</math></td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table> (120Hz)											Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450	$Z(-25^\circ C)/Z(20^\circ C)$	4	3	2	2	2	2	3	3	3	6	6	6	$Z(-40^\circ C)/Z(20^\circ C)$	8	6	4	4	3	3	-	-	-	-	-	-
	Rated Voltage (V)	6.3	10	16	25	35	50	160	200	250	350	400	450																																					
	$Z(-25^\circ C)/Z(20^\circ C)$	4	3	2	2	2	2	3	3	3	6	6	6																																					
$Z(-40^\circ C)/Z(20^\circ C)$	8	6	4	4	3	3	-	-	-	-	-	-																																						

**◆ MULTIPLIER FOR RIPPLE CURRENT**

Frequency coefficient

Coefficient	Frequency (Hz)	60 (50)	120	500	1k	10k $\leq$
		1.5~6.8 $\mu F$	0.65	1.0	1.20	1.30
10~68 $\mu F$		0.8	1.0	1.20	1.30	1.50
100~1000 $\mu F$		0.8	1.0	1.10	1.15	1.20
2200~10000 $\mu F$		0.8	1.0	1.05	1.10	1.15

**◆ PART NUMBER**

<input type="text"/>	WXA	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	DXL
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

