


BXC SERIES

Load Life: 105°C 5000~10000 Hours.

◆ **FEATURES**

- High Ripple Current
- For Electronic Ballast
- RoHS compliance.

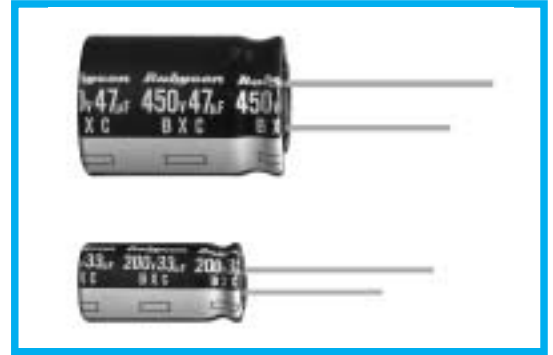

◆ **SPECIFICATIONS**

Items	Characteristics															
Category Temperature Range	-25~+105℃															
Rated Voltage Range	160~450V.DC															
Capacitance Tolerance	±20% (20℃, 120Hz)															
Leakage Current(MAX)	<table><tr><th colspan="2">160~450V.DC</th></tr><tr><th>CV≤1000</th><th>CV>1000</th></tr><tr><td>I=0.1CV+40μA (1minute) I=0.03CV+15μA (5minutes)</td><td>I=0.04CV+100μA (1minute) I=0.02CV+25μA (5minutes)</td></tr></table>	160~450V.DC		CV≤1000	CV>1000	I=0.1CV+40μA (1minute) I=0.03CV+15μA (5minutes)	I=0.04CV+100μA (1minute) I=0.02CV+25μA (5minutes)	I=Leakage Current(μA) C=Rated Capacitance(μF) V=Rated Voltage(V)								
160~450V.DC																
CV≤1000	CV>1000															
I=0.1CV+40μA (1minute) I=0.03CV+15μA (5minutes)	I=0.04CV+100μA (1minute) I=0.02CV+25μA (5minutes)															
Dissipation Factor(MAX) (tanδ)	<table><tr><th>Rated Voltage (V)</th><th>160</th><th>200</th><th>250</th><th>350</th><th>400</th><th>450</th></tr><tr><th>tanδ</th><td>0.15</td><td>0.15</td><td>0.15</td><td>0.20</td><td>0.20</td><td>0.20</td></tr></table>	Rated Voltage (V)	160	200	250	350	400	450	tanδ	0.15	0.15	0.15	0.20	0.20	0.20	(20℃, 120Hz)
Rated Voltage (V)	160	200	250	350	400	450										
tanδ	0.15	0.15	0.15	0.20	0.20	0.20										
Endurance	After life test with rated ripple current at conditions stated in the table below, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td>Within ±20% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value.</td></tr></table> <table><tr><th>Size</th><th>Life Time (hrs)</th></tr><tr><td>8×11.5, 10×12.5</td><td>5000</td></tr><tr><td>10×16, 10×20</td><td>8000</td></tr><tr><td>φD≥12.5</td><td>10000</td></tr></table>		Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	Size	Life Time (hrs)	8×11.5, 10×12.5	5000	10×16, 10×20	8000	φD≥12.5	10000
Capacitance Change	Within ±20% of the initial value.															
Dissipation Factor	Not more than 200% of the specified value.															
Leakage Current	Not more than the specified value.															
Size	Life Time (hrs)															
8×11.5, 10×12.5	5000															
10×16, 10×20	8000															
φD≥12.5	10000															
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><th>Rated Voltage (V)</th><th>160</th><th>200</th><th>250</th><th>350</th><th>400</th><th>450</th></tr><tr><th>Z(-25℃)/Z(20℃)</th><td>3</td><td>3</td><td>3</td><td>6</td><td>6</td><td>6</td></tr></table>	Rated Voltage (V)	160	200	250	350	400	450	Z(-25℃)/Z(20℃)	3	3	3	6	6	6	(120Hz)
Rated Voltage (V)	160	200	250	350	400	450										
Z(-25℃)/Z(20℃)	3	3	3	6	6	6										

◆ **MULTIPLIER FOR RIPPLE CURRENT**

Frequency coefficient


Frequency (Hz)		120	1k	10k	≥100k
Coefficient	1~4.7 μF	0.2	0.4	0.8	1.0
	6.8~15 μF	0.3	0.6	0.9	1.0
	22~82 μF	0.4	0.7	0.9	1.0
	100~220 μF	0.45	0.75	0.9	1.0

◆ **PART NUMBER**

□□□
BXC
□□□□□
□
□□□
□□
D×L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆ DIMENSIONS

(mm)

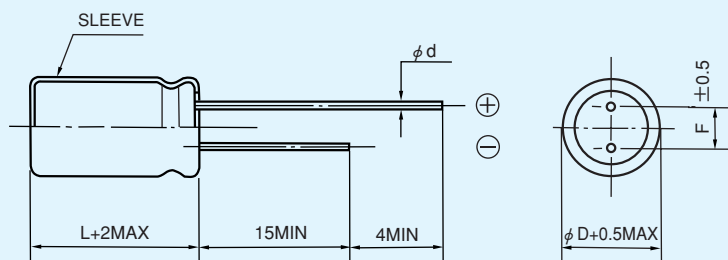

ϕD	8	10	12.5	16	18
ϕd	0.6			0.8	
F	3.5	5.0		7.5	

◆ STANDARD SIZE, RATED RIPPLE CURRENT

Size $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 100kHz)

WV (V.DC) Cap (μF)	160V (2C)		200V (2D)		250V (2E)	
	Size	Ripple	Size	Ripple	Size	Ripple
4.7					8×11.5	160
6.8					10×12.5	250
10	10×16	320	10×16	320	10×16	320
22	10×20	500	10×20	500	10×20	500
33	10×20	650	10×20	650	12.5×20	800
47	10×20	750	12.5×20	980	12.5×20	980
68	12.5×20	1180	12.5×25 16×20	1300	16×20	1300
82			16×20	1380	16×20	1380
100	12.5×25 16×20	1420	16×20	1420	16×25	1530
150	16×25	1890	16×25	1890	18×25	1940
220	18×25	2370				

WV (V.DC) Cap (μF)	350V (2V)		400V (2G)		450V (2W)	
	Size	Ripple	Size	Ripple	Size	Ripple
1			8×11.5 10×12.5	60 70		
1.5			8×11.5 10×12.5	90 100		
1.8			8×11.5 10×12.5	95 120		
2.2			8×11.5 10×12.5	95 140		
3.3			10×12.5 10×16	150 180		
4.7	10×12.5	150	10×16	220	10×20	220
5.6	10×12.5	180	10×16	250	10×20	250
6.8	10×16	280	10×16	280	10×20	280
10	10×20	350	10×20	350	12.5×20	450
15			12.5×20	550	12.5×25	600
22	12.5×20	650	12.5×25 16×20	760	16×20	730
33	16×20	900	16×20	900	16×25	980
47	16×20	1080	16×25 18×20	1180	18×25	1200
68	18×25	1470	18×25	1470		
82	18×25	1530				