

- MONOLITHIC TEMPERATURE COMPENSATED ZENER REFERENCE CHIPS
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- 8.4 VOLT NOMINAL ZENER VOLTAGE $\pm 5\%$
- ELECTRICALLY SIMILAR TO 1N3154 THRU 1N3156
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES, WITH THE EXCEPTION OF SOLDER REFLOW

CD3154
thru
CD3156

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C

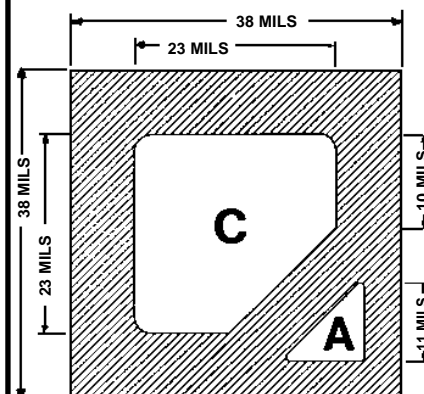


FIGURE 1

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

JEDEC TYPE NUMBER	ZENER VOLTAGE $V_{ZT} @ I_{ZT}$	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE Z_{ZT} (Note 1)	MAXIMUM VOLTAGE TEMPERATURE STABILITY ΔV_{ZT} MAXIMUM (Note 2)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT
	VOLTS	mA	OHMS	mV	°C	% / °C
CD3154	8.00-8.80	10	25	130	-55 to + 100	0.01
CD3155	8.00-8.80	10	25	65	-55 to + 100	0.005
CD3156	8.00-8.80	10	25	26	-55 to + 100	0.002

NOTE 1 Zener impedance is derived by superimposing on I_{ZT} @ 60Hz rms a.c. current equal to 10% of I_{ZT}

NOTE 2 The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No. 5.

DESIGN DATA

METALLIZATION:

Top: C (Cathode).....Al
A (Anode).....Al
Back:.....Au

AL THICKNESS.....25,000 Å Min

GOLD THICKNESS...4,000 Å Min

CHIP THICKNESS.....10 Mils

CIRCUIT LAYOUT DATA:

Backside must be electrically isolated.

Backside is not cathode.

For Zener operation cathode must be operated positive with respect to anode.

TOLERANCES: ALL

Dimensions ± 2 mils



COMPENSATED DEVICES INCORPORATED

22 COREY STREET, MELROSE, MASSACHUSETTS 02176


PHONE (781) 665-1071

WEBSITE: <http://www.cdi-diodes.com>


FAX (781) 665-7379

E-mail: mail@cdi-diodes.com


CD3154 thru CD3156

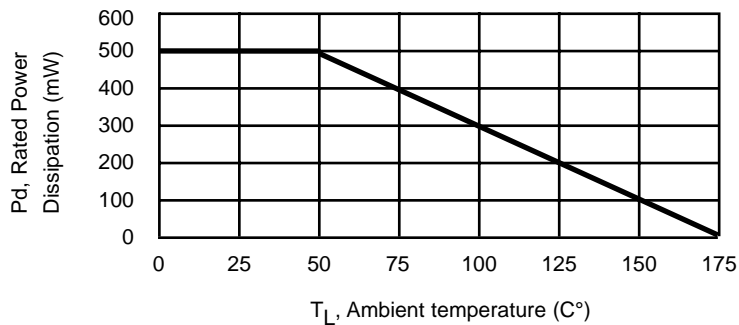

**FIGURE 2
POWER DERATING CURVE**

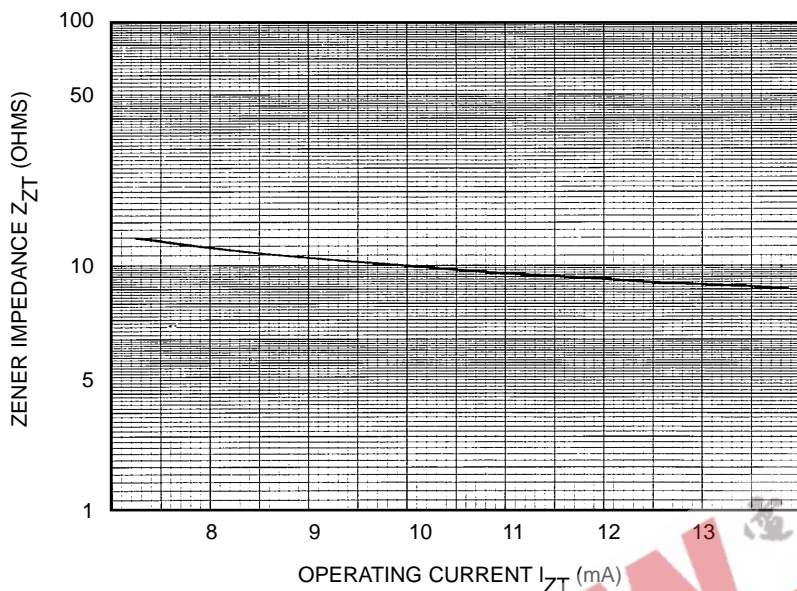

**FIGURE 3
ZENER IMPEDANCE
VS.
OPERATING CURRENT**

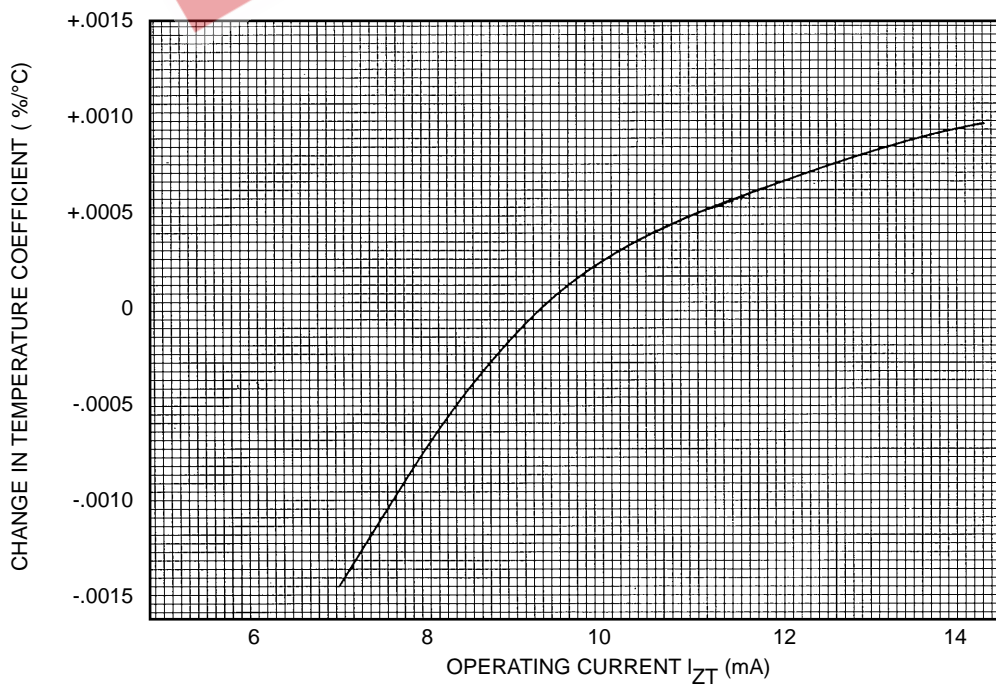

**FIGURE 4
TYPICAL CHANGE OF TEMPERATURE COEFFICIENT
WITH CHANGE IN OPERATING CURRENT**