




KBU4005 Thru KBU410

4 AMP SILICON BRIDGE RECTIFIER

■ FEATURES


- Rating to 1000V PRV
- Ideal for printed circuit board
- Surge overload rating to 200 Amperes peak
- Reliable low cost construction utilizing molded plastic technique
- UL recognized: File #E106441
- UL recognized 94V-O plastic material

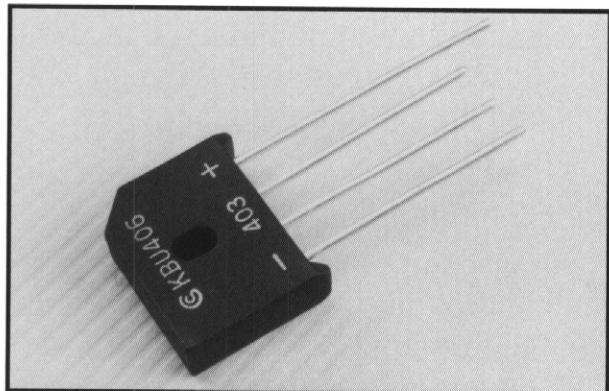

■ Mechanical Data

- Case: Molded Plastic
- Mounting torque: 5 in. lb. max.
- Mounting position: Any
- Weight: 0.3 ounce, 8.0 grams

■ Outline Drawing

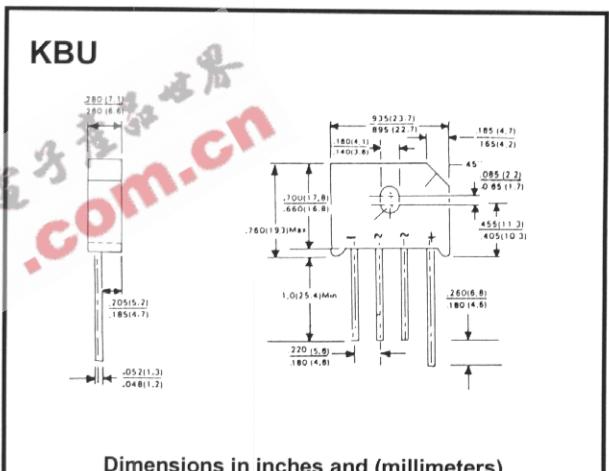

Dimensions in inches and (millimeters)

■ Maximum Ratings & Characteristics

- Ratings at 25° C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load, derate current by 20%

		KBU4005	KBU401	KBU402	KBU404	KBU406	KBU408	KBU410	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	60	100	200	400	600	800	1000	V
Maximum Average Forward Output Current @ T _C = 100°C @ T _A = 65°C	I _(AV)				4.0				A
Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave Superimposed On Rated Load	I _{FSM}				200				A
Maximum DC Forward Voltage Drop per Element At 2.0A DC	V _F				1				V
Maximum DC Reverse Current At Rated @ T _A = 25°C DC Blocking Voltage per Element @ T _C = 100°C	I _R				10 1				µA mA
Maximum Thermal Resistance (Note)	R _{THJC}				3.3				°C/W
Operating Temperature Range	T _J				-55 to +125				°C
Storage Temperature Range	T _{STG}				-55 to +150				°C

Note: Thermal resistance junction to case per diode