


Features

- Glass Passivated Die Construction
- High Case Dielectric Strength of 1500V_{RMS}
- Low Reverse Leakage Current
- Surge Overload Rating to 120A Peak
- Ideal for Printed Circuit Board Applications
- Plastic Material - UL Flammability Classification 94V-0
- UL Listed Under Recognized Component Index, File Number E94661

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads, Solderable per MIL-STD-202, Method 208
- Polarity: Molded on Body
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 in-lbs Maximum
- Approx. Weight: 4.6 grams
- Marking: Type Number

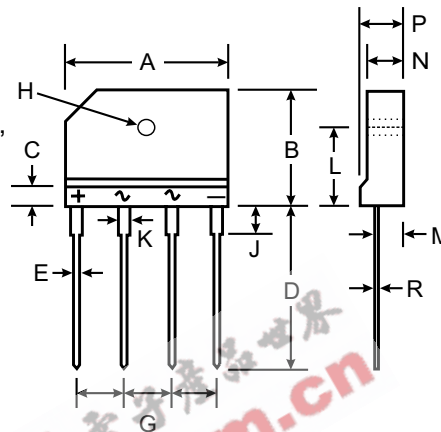

| KBJ | | |
|----------------------|--------------------|--------------------|
| Dim | Min | Max |
| A | 24.80 | 25.20 |
| B | 14.70 | 15.30 |
| C | 4.00 Nominal | |
| D | 17.20 | 17.80 |
| E | 0.90 | 1.10 |
| G | 7.30 | 7.70 |
| H | 3.10 \varnothing | 3.40 \varnothing |
| J | 3.30 | 3.70 |
| K | 1.50 | 1.90 |
| L | 9.30 | 9.70 |
| M | 2.50 | 2.90 |
| N | 3.40 | 3.80 |
| P | 4.40 | 4.80 |
| R | 0.60 | 0.80 |
| All Dimensions in mm | | |

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| Characteristic | Symbol | KBJ 4005G | KBJ 401G | KBJ 402G | KBJ 404G | KBJ 406G | KBJ 408G | KBJ 410G | Unit |
|---|--|-------------|----------|----------|----------|----------|----------|----------|------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V _{RRM} V _{RWM} V _R | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| RMS Reverse Voltage | V _{R(RMS)} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Average Rectified Output Current @ T _C = 115°C | I _O | 4.0 | | | | | | | A |
| Non-Repetitive Peak Forward Surge Current, 8.3 ms single half-sine-wave superimposed on rated load (JEDEC method) | I _{FSM} | 120 | | | | | | | A |
| Forward Voltage per element @ I _F = 2.0A | V _{FM} | 1.0 | | | | | | | V |
| Peak Reverse Current @ T _C = 25°C at Rated DC Blocking Voltage @ T _C = 125°C | I _{RM} | 5.0 500 | | | | | | | μA |
| Typical Junction Capacitance per Element (Note 1) | C _j | 40 | | | | | | | pF |
| Typical Thermal Resistance (Note 2) | R _{θJC} | 5.5 | | | | | | | °C/W |
| Operating and Storage Temperature Range | T _J , T _{STG} | -65 to +150 | | | | | | | °C |

- Notes: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
2. Thermal resistance from junction to case per element. Unit mounted on 300 x 300 x 1.6mm aluminum plate heat sink.

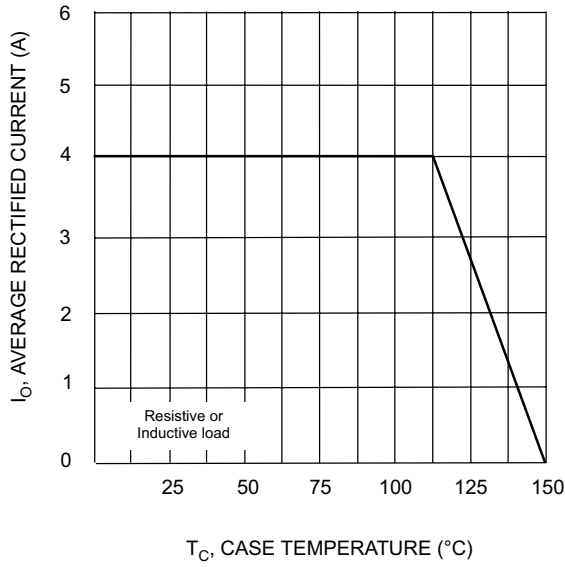


Fig. 1 Forward Current Derating Curve

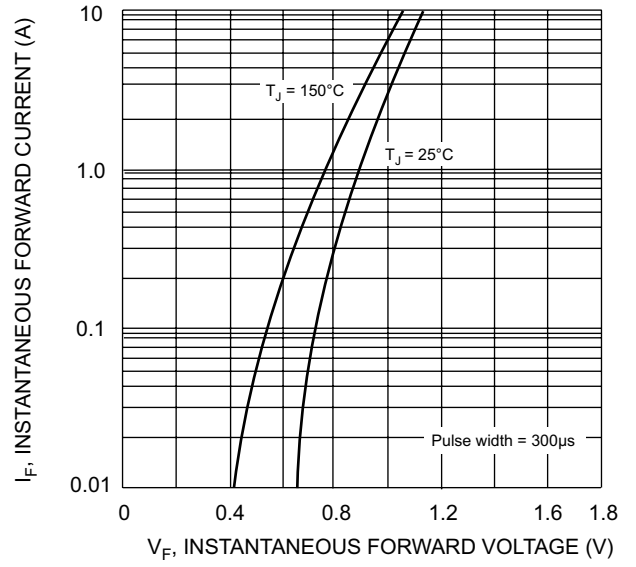


Fig. 2 Typical Forward Characteristics

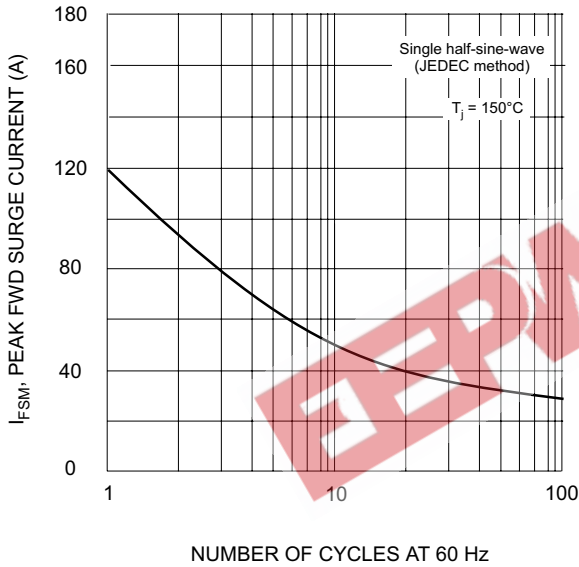


Fig. 3 Max Non-Repetitive Surge Current

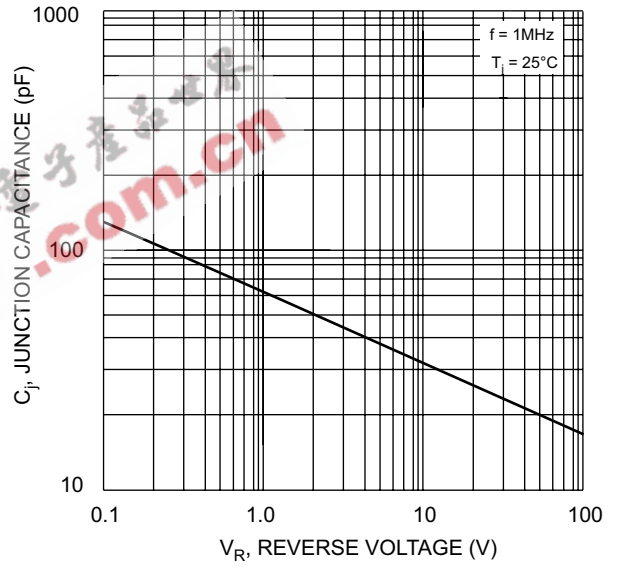


Fig. 4 Typical Junction Capacitance

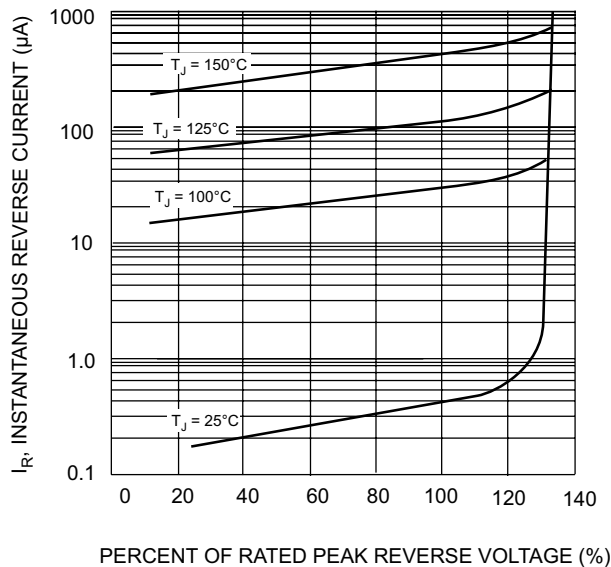


Fig. 5 Typical Reverse Characteristics