

## SN54284, SN54285, SN74284, SN74285 4-BIT BY 4-BIT PARALLEL BINARY MULTIPLIERS

MAY 1972 — REVISED MARCH 1988

- Fast Multiplication of Two Binary Numbers  
8-Bit Product in 40 ns Typical
- Expandable for N-Bit-by-n-Bit Applications:  
16-Bit Product in 70 ns Typical  
32-Bit Product in 103 ns Typical
- Fully Compatible with Most TTL Circuits
- Diode-Clamped Inputs Simplify System Design

### description


These high-speed TTL circuits are designed to be used in high-performance parallel multiplication applications. When connected as shown in Figure A, these circuits perform the positive-logic multiplication of two 4-bit binary words. The eight-bit binary product is generated with typically only 40 nanoseconds delay.

This basic four-by-four multiplier can be utilized as a fundamental building block for implementing larger multipliers. For example, the four-by-four building blocks can be connected as shown in Figure B to generate submultiple partial products. These results can then be summed in a Wallace tree, and, as illustrated, will produce a 16-bit product for the two eight-bit words typically in 70 nanoseconds. SN54H183/SN74H183 carry-save adders and SN54S181/SN74S181 arithmetic logic units with the SN54S182/SN74S182 look-ahead generator are used to achieve this high performance. The scheme is expandable for implementing N × M bit multipliers.

The SN54284 and SN54285 are characterized for operation over the full military temperature range of -55°C to 125°C; the SN74284 and SN74285 are characterized for operation from 0°C to 70°C.


SN54284 . . . J OR W PACKAGE  
SN74284 . . . N PACKAGE

(TOP VIEW)



SN54285 . . . J OR W PACKAGE  
SN74285 . . . N PACKAGE



(TOP VIEW)



2

TTL Devices


### logic symbols†



†These symbols are in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.

**SN54284, SN54285, SN74284, SN74285  
4-BIT BY 4-BIT PARALLEL BINARY MULTIPLIERS**

schematics

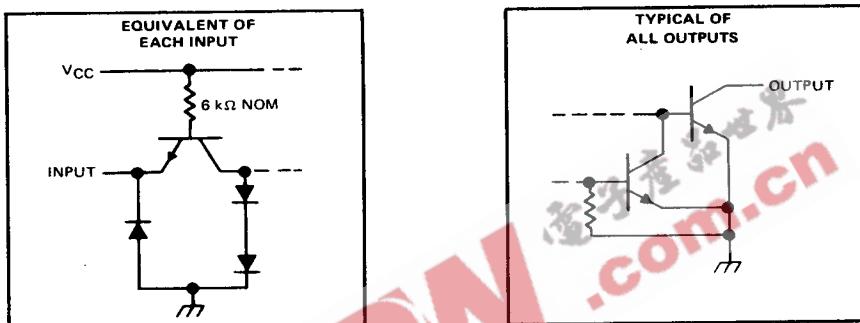

2

TTL Devices

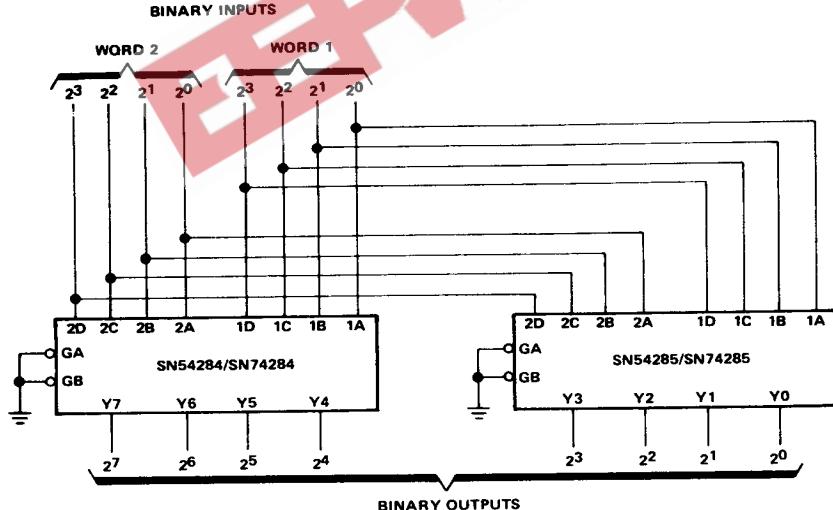
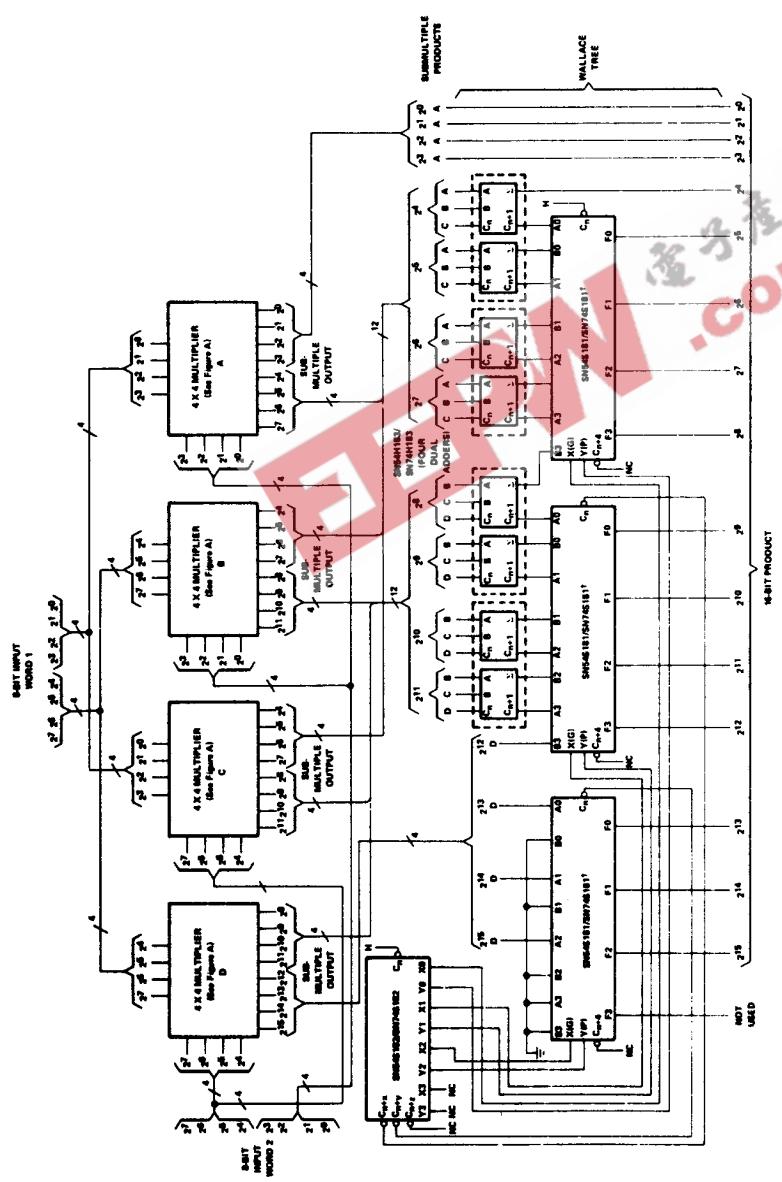


FIGURE A-4 X 4 MULTIPLIER

**SN54284, SN54285, SN74284, SN74285  
4-BIT BY 4-BIT PARALLEL BINARY MULTIPLIERS**



**FIGURE 8-8 X 8 MULTIPLIER**

<sup>†</sup>Other terminals of the three SN54S181/SN74S181 ALU's are connected as follows:  $S_3 = H$ ,  $S_2 = L$ ,  $S_1 = L$ ,  $S_0 = H$ ,  $M = L$ . Output  $A = B$  is not used for this application.

**TTL Devices**

**SN54284, SN54285, SN74284, SN74285  
4-BIT BY 4-BIT PARALLEL BINARY MULTIPLIERS**
**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

Supply voltage, V <sub>CC</sub> (see Note 1)	7 V
Input voltage	5.5 V
Operating free-air temperature range: SN54' Circuits	-55°C to 125°C
SN74' Circuits	0°C to 70°C

Storage temperature range

-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

**recommended operating conditions**

	SN54284			SN74284			UNIT
	SN54285	SN54285	SN74285	MIN	NOM	MAX	
Supply voltage, V <sub>CC</sub>	4.5	5	5.5	4.75	5	5.25	V
High-level output voltage, V <sub>OH</sub>			5.5			5.5	V
Low-level output current, I <sub>OL</sub>			16			16	mA
Operating free-air temperature, T <sub>A</sub>	-55	125	0	70			°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS <sup>†</sup>	MIN	TYP <sup>‡</sup>	MAX	UNIT
V <sub>IH</sub> High-level input voltage		2			V
V <sub>IL</sub> Low-level input voltage			0.8		V
V <sub>I</sub> Input clamp voltage	V <sub>CC</sub> = MIN, I <sub>I</sub> = -12 mA			-1.5	V
I <sub>OH</sub> High-level output current	V <sub>CC</sub> = MIN, V <sub>IH</sub> = 2 V, V <sub>IL</sub> = 0.8 V, V <sub>OH</sub> = 5.5 V		40		μA
V <sub>OL</sub> Low-level output voltage	V <sub>CC</sub> = MIN, I <sub>OL</sub> = 12 mA V <sub>IH</sub> = 2 V, V <sub>IL</sub> = 0.8 V	0.4			V
I <sub>I</sub> Input current at maximum input voltage	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5 V		1		mA
I <sub>IH</sub> High-level input current	V <sub>CC</sub> = MAX, V <sub>I</sub> = 2.4 V		40		μA
I <sub>IL</sub> Low-level input current	V <sub>CC</sub> = MAX, V <sub>I</sub> = 0.4 V		-1		mA
I <sub>CC</sub> Supply current	V <sub>CC</sub> = MAX, T <sub>A</sub> = 125°C, See Note 2		99		mA
	V <sub>CC</sub> = MAX, See Note 2	SN54284, SN54285 N package only			
	V <sub>CC</sub> = MAX, See Note 2	SN54284, SN54285 SN74284, SN74285	92	110	
		SN74284, SN74285	92	130	

<sup>†</sup>For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

<sup>‡</sup>All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

NOTE 2: With outputs open and both enable inputs grounded, I<sub>CC</sub> is measured first by selecting an output product which contains three or more high-level bits, then by selecting an output product which contains four low-level bits.

**switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C**

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PLH</sub> Propagation delay time, low-to-high-level output from enable	C <sub>L</sub> = 30 pF to GND,	20	30		ns
t <sub>PHL</sub> Propagation delay time, high-to-low-level output from enable	R <sub>L1</sub> = 300 Ω to V <sub>CC</sub> ,	20	30		ns
t <sub>PLH</sub> Propagation delay time, low-to-high-level output from word inputs	R <sub>L2</sub> = 600 Ω to GND,	40	60		ns
t <sub>PHL</sub> Propagation delay time, high-to-low-level output from word inputs	See Note 3	40	60		ns

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.