



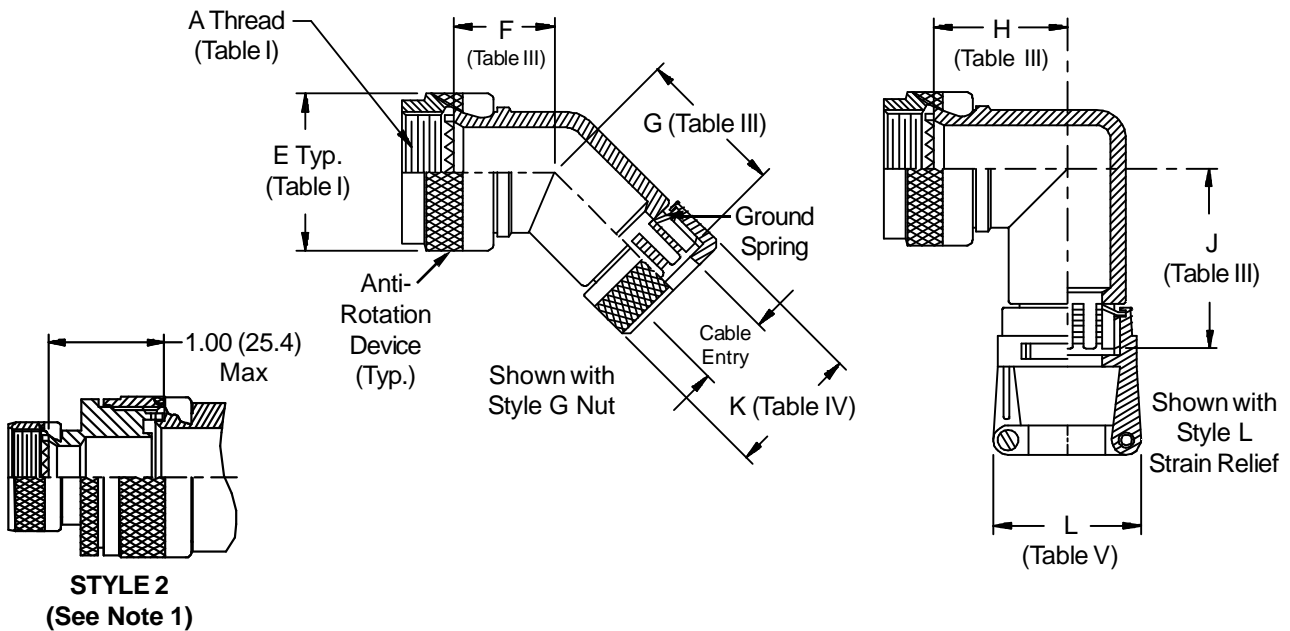


**CONNECTOR
 DESIGNATORS
 A-F-H-L-S
 SELF-LOCKING
 ROTATABLE
 COUPLING**

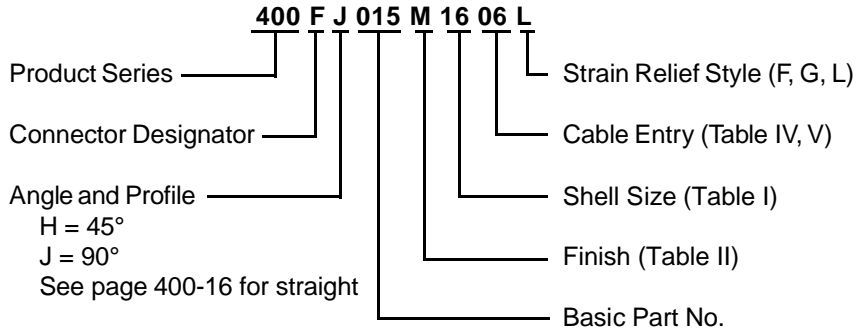

See inside back cover
fold-out or pages 13 and
14 for Tables I and II.

| TABLE III: ELBOW DIMENSIONS | | | | | | | |
|------------------------------------|----|-------------|--------------|--------------|--------------|--|--|
| Shell Size | | F Max | G Max | H Max | J Max | | |
| Conn. Desig. A-F-L-S | H | | | | | | |
| 08 | 09 | .795 (20.2) | 1.510 (38.4) | .906 (23.0) | 1.620 (41.1) | | |
| 10 | 11 | .820 (20.8) | 1.540 (39.1) | .966 (24.5) | 1.680 (42.7) | | |
| 12 | 13 | .844 (21.4) | 1.560 (39.6) | 1.026 (26.1) | 1.740 (44.2) | | |
| 14 | 15 | .861 (21.9) | 1.590 (40.4) | 1.076 (27.3) | 1.810 (46.0) | | |
| 16 | 17 | .888 (22.6) | 1.610 (40.9) | 1.136 (28.9) | 1.870 (47.5) | | |
| 18 | 19 | .904 (23.0) | 1.620 (41.1) | 1.176 (29.9) | 1.890 (48.0) | | |
| 20 | 21 | .929 (23.6) | 1.640 (41.7) | 1.236 (31.4) | 1.950 (49.5) | | |
| 22 | 23 | .956 (24.3) | 1.680 (42.7) | 1.296 (32.9) | 2.030 (51.6) | | |
| 24 | 25 | .979 (24.9) | 1.710 (43.4) | 1.356 (34.4) | 2.100 (53.3) | | |

| TABLE IV: CABLE ENTRY | | | |
|------------------------------|--------------|--------------------|-------------|
| Dash No. | K Max | Cable Entry Max | |
| | | 02 | .545 (13.8) |
| 03 | .670 (17.0) | .375 (9.5) | |
| 04 | .795 (20.2) | .500 (12.7) | |
| 05 | .920 (23.4) | .625 (15.9) | |
| 06 | 1.045 (26.5) | .750 (19.1) | |
| 07 | 1.170 (29.7) | .875 (22.2) | |
| 08 | 1.295 (32.9) | 1.000 (25.4) | |
| 09 | 1.420 (36.1) | 1.125 (28.6) | |
| 10 | 1.670 (42.4) | 1.250 (31.8) | |

| TABLE V: CABLE ENTRY | | | | | |
|-----------------------------|--------------|-------------|--------------|--------------|--------------|
| Dash No. | L Max | Cable Range | | | |
| | | Min | | Max | |
| 02 | .968 (24.6) | .125 (3.2) | .250 (6.4) | .375 (9.5) | .500 (12.7) |
| 03 | 1.046 (26.6) | .250 (6.4) | .375 (9.5) | .500 (12.7) | .750 (19.1) |
| 04 | 1.156 (29.4) | .250 (6.4) | .500 (12.7) | .625 (15.9) | .875 (22.2) |
| 05 | 1.218 (30.9) | .375 (9.5) | .625 (15.9) | .750 (19.1) | 1.000 (25.4) |
| 06 | 1.343 (34.1) | .500 (12.7) | .750 (19.1) | 1.000 (25.4) | 1.250 (31.8) |
| 07 | 1.468 (37.3) | .625 (15.9) | .875 (22.2) | 1.000 (25.4) | 1.250 (31.8) |
| 08 | 1.593 (40.5) | .625 (15.9) | .875 (22.2) | 1.000 (25.4) | 1.250 (31.8) |
| 09 | 1.718 (43.6) | .750 (19.1) | 1.125 (28.6) | 1.250 (31.8) | 1.250 (31.8) |
| 10 | 1.843 (46.8) | .875 (22.2) | 1.250 (31.8) | 1.250 (31.8) | 1.250 (31.8) |

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions F, G, H and J will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.