

**HXC SERIES****NEW****105°C Higher Ripple, Snap-in Terminal Type****◆ FEATURES**

- Load Life : 105°C 2000 hours.
- Higher ripple current endurance than MXC series.
- RoHS compliance.

**◆ SPECIFICATIONS**

Items	Characteristics								
Category Temperature Range	-25 ~ +105℃								
Rated Voltage Range	200 ~ 450V.DC								
Capacitance Tolerance	± 20% (20℃, 120Hz)								
Leakage Current(MAX)	I=3√CV (After 5 minutes application of rated voltage) I=Leakage Current (μA) V= Rated Voltage (V) C= Rated Capacitance (μ F)								
Dissipation Factor(MAX) (tanδ)	<table><tr><td>Rated Voltage (V)</td><td>200 ~ 400</td><td>450</td></tr><tr><td>tanδ</td><td>0.15</td><td>0.20</td></tr></table>	Rated Voltage (V)	200 ~ 400	450	tanδ	0.15	0.20	(20℃, 120Hz)	
Rated Voltage (V)	200 ~ 400	450							
tanδ	0.15	0.20							
Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (V)</td><td>200</td><td>400 ~ 450</td></tr><tr><td>Z(-25℃) /Z(20℃)</td><td>3</td><td>8</td></tr></table>	Rated Voltage (V)	200	400 ~ 450	Z(-25℃) /Z(20℃)	3	8	(120Hz)	
Rated Voltage (V)	200	400 ~ 450							
Z(-25℃) /Z(20℃)	3	8							
Endurance	After applying rated voltage with rated ripple current for 2000hrs at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td>Within ±20% of the initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200% of the specified value.</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value.</td></tr></table>			Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.								
Dissipation Factor	Not more than 200% of the specified value.								
Leakage Current	Not more than the specified value.								

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)		60(50)	120	500	1k	10k \leq
Coefficient	200WV	0.80	1.00	1.20	1.30	1.50
	400~450WV	0.80	1.00	1.20	1.25	1.40

◆ PART NUMBER


<input type="text"/>	HXC	<input type="text"/>	<input type="text"/>	OOE	SN	D × L
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Terminal Code	Case Size

◆ Option

	Code
without plate	OOE
with plate	Blank

◆ DIMENSIONS

(mm)

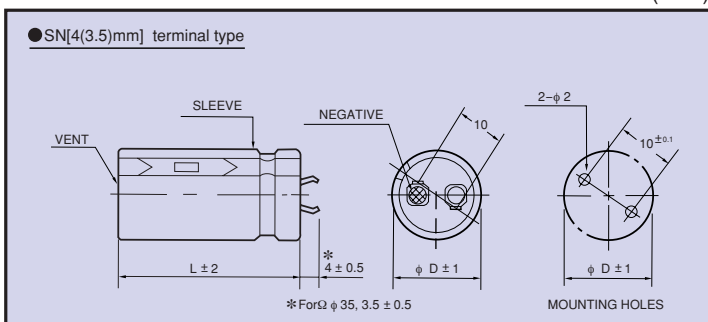

◆ STANDARD SIZE, RATED RIPPLE CURRENT

Cap(μF) WV φ D	200							
	φ 22		φ 25		φ 30		φ 35	
270	22 × 25	1.64						
330	22 × 30	1.89						
390	22 × 35	2.14	25 × 25	1.99				
470	22 × 40	2.41	25 × 30	2.32	30 × 25	2.27		
560	22 × 45	2.71	25 × 35	2.63	30 × 25	2.43		
680	22 × 50	3.06	25 × 35	2.81	30 × 30	2.82		
820			25 × 45	3.32	30 × 30	2.94	35 × 25	2.56
1000			25 × 50	3.72	30 × 35	3.36	35 × 30	3.07
1200					30 × 40	3.78	35 × 35	3.57
1500					30 × 50	4.48	35 × 40	4.01
1800							35 × 45	4.44
2200							35 × 50	4.90

Cap(μF) WV φ D	400							
	φ 22		φ 25		φ 30		φ 35	
82	22 × 30	0.81						
100	22 × 35	0.99	25 × 25	0.99				
120	22 × 40	1.19	25 × 30	1.19				
150	22 × 45	1.43	25 × 35	1.43	30 × 25	1.41		
180	22 × 50	1.60	25 × 40	1.61	30 × 30	1.61		
220			25 × 45	1.83	30 × 35	1.84		
270			25 × 50	2.06	30 × 40	2.10	35 × 30	2.00
330					30 × 45	2.36	35 × 35	2.29
390					30 × 50	2.62	35 × 40	2.56
470							35 × 45	2.86
560							35 × 50	3.15

Cap(μF) WV φ D	450							
	φ 22		φ 25		φ 30		φ 35	
68	22 × 30	0.67						
82	22 × 35	0.81	25 × 25	0.81				
100	22 × 40	0.99	25 × 30	0.99				
120	22 × 45	1.19	25 × 35	1.19	30 × 25	1.19		
150			25 × 40	1.49	30 × 30	1.49	35 × 25	1.49
180			25 × 45	1.68	30 × 35	1.70	35 × 25	1.61
220			25 × 50	1.89	30 × 40	1.92	35 × 30	1.85
270					30 × 45	2.18	35 × 35	2.12
330					30 × 50	2.45	35 × 40	2.41
390							35 × 45	2.67
470							35 × 50	2.97

↑ Ripple Current (A r.m.s./120Hz, 105°C)
 ↑ Case Size φ D × L(mm)