

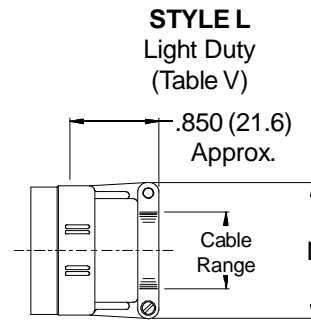
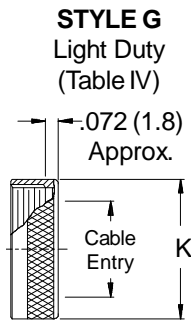
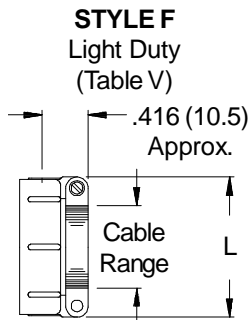


**CONNECTOR
 DESIGNATORS
 A-F-H-L-S
 SELF-LOCKING
 ROTATABLE
 COUPLING**

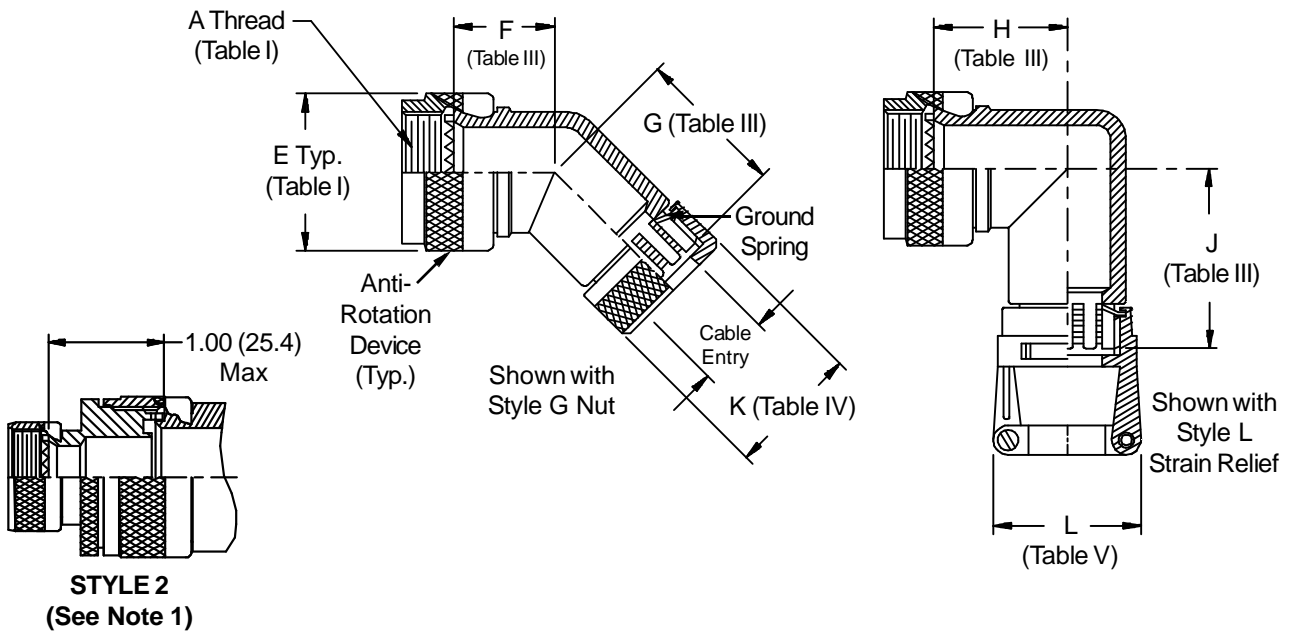

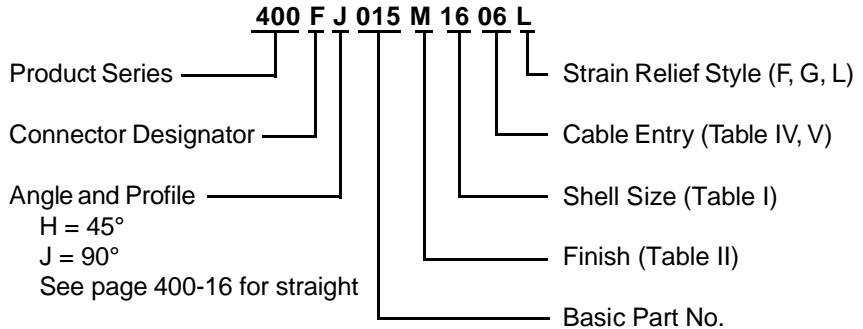

See inside back cover
fold-out or pages 13 and
14 for Tables I and II.

TABLE III: ELBOW DIMENSIONS									
Shell Size		F		G		H		J	
Conn. Desig.	H	Max		Max		Max		Max	
A-F-L-S	H	F	G	H	J	F	G	H	J
08	09	.795 (20.2)	1.510 (38.4)	.906 (23.0)	1.620 (41.1)				
10	11	.820 (20.8)	1.540 (39.1)	.966 (24.5)	1.680 (42.7)				
12	13	.844 (21.4)	1.560 (39.6)	1.026 (26.1)	1.740 (44.2)				
14	15	.861 (21.9)	1.590 (40.4)	1.076 (27.3)	1.810 (46.0)				
16	17	.888 (22.6)	1.610 (40.9)	1.136 (28.9)	1.870 (47.5)				
18	19	.904 (23.0)	1.620 (41.1)	1.176 (29.9)	1.890 (48.0)				
20	21	.929 (23.6)	1.640 (41.7)	1.236 (31.4)	1.950 (49.5)				
22	23	.956 (24.3)	1.680 (42.7)	1.296 (32.9)	2.030 (51.6)				
24	25	.979 (24.9)	1.710 (43.4)	1.356 (34.4)	2.100 (53.3)				

TABLE IV: CABLE ENTRY				
Dash No.	K		Cable Entry	
	Max		Max	
02	.545 (13.8)	.250 (6.4)		
03	.670 (17.0)	.375 (9.5)		
04	.795 (20.2)	.500 (12.7)		
05	.920 (23.4)	.625 (15.9)		
06	1.045 (26.5)	.750 (19.1)		
07	1.170 (29.7)	.875 (22.2)		
08	1.295 (32.9)	1.000 (25.4)		
09	1.420 (36.1)	1.125 (28.6)		
10	1.670 (42.4)	1.250 (31.8)		

TABLE V: CABLE ENTRY					
Dash No.	L		Cable Range		
	Max		Min	Max	
02	.968 (24.6)	.125 (3.2)	.250 (6.4)		
03	1.046 (26.6)	.250 (6.4)	.375 (9.5)		
04	1.156 (29.4)	.250 (6.4)	.500 (12.7)		
05	1.218 (30.9)	.375 (9.5)	.625 (15.9)		
06	1.343 (34.1)	.500 (12.7)	.750 (19.1)		
07	1.468 (37.3)	.625 (15.9)	.875 (22.2)		
08	1.593 (40.5)	.625 (15.9)	1.000 (25.4)		
09	1.718 (43.6)	.750 (19.1)	1.125 (28.6)		
10	1.843 (46.8)	.875 (22.2)	1.250 (31.8)		

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions F, G, H and J will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.