


LARGE SIZE CAPACITOR CHIPS 50 - 5,000 VDC



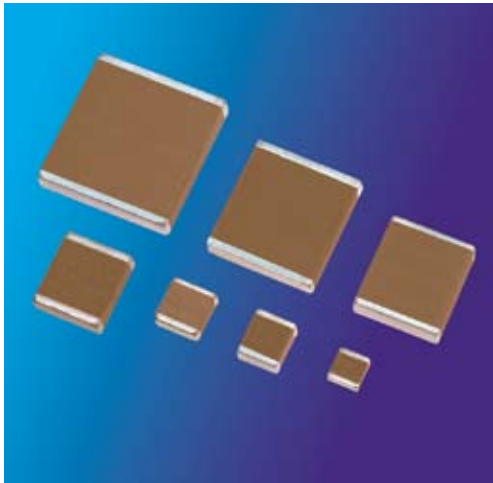


KEY FEATURES

- Rated Working Voltages from 50 to 15,000 VDC
- Low ESR Ceramic Out-performs Tantalums
- Compact MLC Designs Smaller Than Film or Disc
- MIL-PRF-55681 & Hi-Rel Screened Versions Available
- Custom Sizes, Voltages, and Values Available

APPLICATIONS


- Power Supplies
- Voltage Multipliers
- Data Isolation
- Surge Protection
- Industrial Control Circuits
- Custom Applications

MAXIMUM CAPACITANCE VS DC VOLTAGE RATING





			50 V	100 V	250 V	500 V	1K V	2K V	3K V	4K V	5K V	
S49 / 1825	 Inches (mm) L .180 ±.010 (4.57 ±.25) W .250 ±.010 (6.35 ±.25) T .140 Max. (3.56 Max) E/B .025 ±.015 (0.64±.38)	NPO	473	383	273	273	153	562	222	102	271	
		X7R	185	105	125	334	104	223	822	202	821	
S47 / 2220	 Inches (mm) L .225 ±.015 (5.72 ±.38) W .200 ±.015 (5.08 ±.38) T .150 Max. (3.81 Max) E/B .025 ±.015 (0.64±.38)	NPO	683	473	333	273	183	682	272	122	391	
		X7R	185	125	105	564	184	273	822	332	152	
S48 / 2225	 Inches (mm) L .225 ±.010 (5.72 ±.25) W .255 ±.015 (6.48 ±.38) T .150 Max. (3.81 Max) E/B .025 ±.015 (0.64±.38)	NPO	753	563	393	333	223	822	472	222	681	
		X7R	225	225	125	824	224	473	153	563	222	

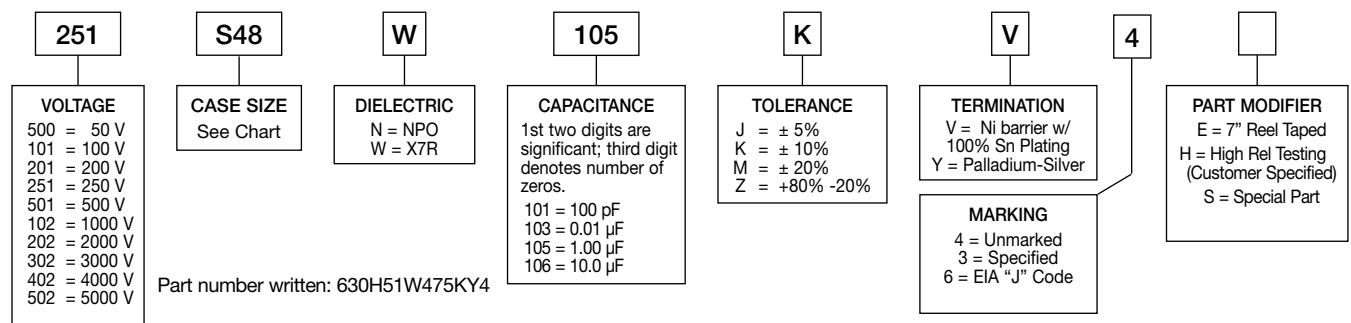Available capacitance values include the following significant retma values and their multiples
 1.0 1.2 1.5 1.8 2.2 2.7 3.3 3.9 4.7 5.6 6.8 8.2 (1.0 = 1.0, 10, 100, 1000, etc.)

HOW TO ORDER



MAXIMUM CAPACITANCE VS DC VOLTAGE RATING

			500 V	1K V	2K V	3K V	4K V	5K V				
H42 / 1515 		Inches (mm)										
	L	.150 ±.015 (3.81 ±.38)	NPO	472	152	681	331	151	101			
	W	.150 ±.015 (3.81 ±.38)	X7R	683	223	332	222	681	331			
	T	.150 Max. (3.81 Max)										
E/B	.025 ±.015 (0.64±.38)											
H47 / 2520 		Inches (mm)										
	L	.250 ±.018 (6.35 ±.46)	NPO	223	332	152	681	331	221			
	W	.200 ±.015 (5.08 ±.38)	X7R	224	683	153	682	222	102			
	T	.150 Max. (3.81 Max)										
E/B	.025 ±.015 (0.64±.38)											
H51 / 3530 		Inches (mm)										
	L	.350 ±.035 (8.89 ±.89)	NPO	563	472	332	152	102	471			
	W	.300 ±.030 (7.62 ±.76)	X7R	474	154	473	333	103	682			
	T	.200 Max (5.08 Max)										
E/B	.025 ±.015 (0.64±.38)											
H54 / 3640 		Inches (mm)										
	L	.360 ± .030 (9.14 ± .76)	NPO	224	184	154	683	822	332	222	152	681
	W	.400 ± .030 (10.16 ±.76)	X7R	825	565	475	155	474	683	473	153	822
	T	.200 Max (5.08 Max)										
E/B	.025 ±.015 (0.64±.38)											

Available capacitance values include the following significant retma values and their multiples:
 1.0 1.2 1.5 1.8 2.2 2.7 3.3 3.9 4.7 5.6 6.8 8.2 (1.0 = 1.0, 10, 100, 1000, etc.)
 Consult factory for sizes, values, & voltages not shown.

ELECTRICAL CHARACTERISTICS

Meets the standard NPO & X7R dielectric specifications listed on page 28 & 29 except

Dielectric Withstanding Voltage DWV = 750 VDC for 500 WVDC rated units,
 DWV = 945 VDC for 630 WVDC rated units,
 DWV = 1.2 X rated WVDC for ratings ≥ 1,000 WVDC

NOTE: Circuit applications above 1KVDC may require surface coating to prevent external arcing.

