

54F/74F544 Octal Registered Transceiver

General Description

The 'F544 octal transceiver contains two sets of D-type latches for temporary storage of data flowing in either direction. Separate Latch Enable and Output Enable inputs are provided for each register to permit independent control of inputting and outputting in either direction of data flow. The A outputs are guaranteed to sink 24 mA (20 mA Mil) while the B outputs are rated for 64 mA (48 mA Mil). The 'F544 inverts data in both directions.

Features


- 8-bit octal transceiver
- Back-to-back registers for storage
- Separate controls for data flow in each direction
- A outputs sink 24 mA (20 mA Mil), B outputs sink 64 mA (48 mA Mil)
- 300 mil slim PDIP

Commercial	Military	Package Number	Package Description
74F544SPC		N24C	24-Lead (0.300" Wide) Molded Dual-In-Line
	54F544DM (Note 2)	J24A	24-Lead Ceramic Dual-In-Line
	54F544SDM (Note 2)	J24F	24-Lead (0.300" Wide) Ceramic Dual-In-Line
74F544SC (Note 1)		M24B	24-Lead (0.300" Wide) Molded Small Outline, JEDEC
74F544MSA (Note 1)		MSA24	24-Lead Molded Shrink Small Outline, EIAJ, Type II
	54F544FM (Note 2)	W24C	24-Lead Cerpack
	54F544LM (Note 2)	E28A	24-Lead Ceramic Leadless Chip Carrier, Type C


Note 1: Devices also available in 13" reel. Use suffix = SCX and MSAX.

Note 2: Military grade device with environmental and burn-in processing. Use suffix = DMQB, FMQB and LMQB

Logic Symbols




TL/F/9555-2

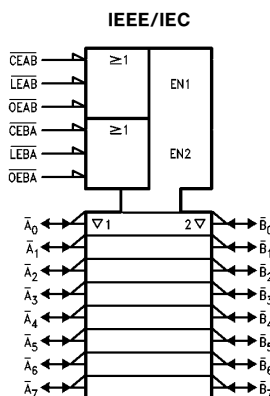


TL/F/9555-1

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

Connection Diagrams

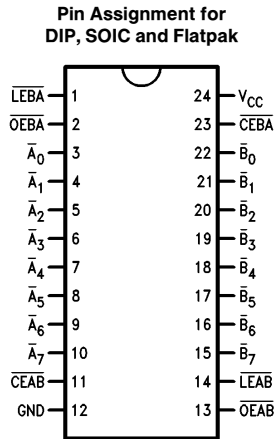

TL/F/9555-3

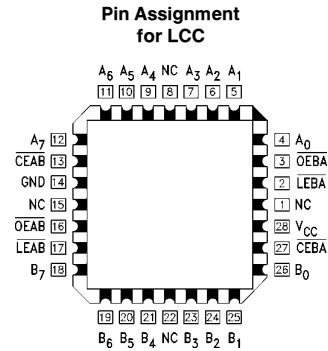

TL/F/9555-4

Unit Loading/Fan Out

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
$\overline{OEAB}$	A-to-B Output Enable Input (Active LOW)	1.0/1.0	20 μA / -0.6 mA
$\overline{OEBA}$	B-to-A Output Enable Input (Active LOW)	1.0/1.0	20 μA / -0.6 mA
$\overline{CEAB}$	A-to-B Enable Input (Active LOW)	1.0/2.0	20 μA / -1.2 mA
$\overline{CEBA}$	B-to-A Enable Input (Active LOW)	1.0/2.0	20 μA / -1.2 mA
$\overline{LEAB}$	A-to-B Latch Enable Input (Active LOW)	1.0/1.0	20 μA / -0.6 mA
$\overline{LEBA}$	B-to-A Latch Enable Input (Active LOW)	1.0/1.0	20 μA / -0.6 mA
$\overline{A_0}-\overline{A_7}$	A-to-B Data Inputs or B-to-A TRI-STATE Outputs	3.5/1.083 150/40(33.3)	70 μA / -650 μA -3 mA/24 mA (20 mA)
$\overline{B_0}-\overline{B_7}$	B-to-A Data Inputs or A-to-B TRI-STATE Outputs	3.5/1.083 600/106.6(80)	70 μA / -650 μA -12 mA/64 mA (48 mA)

Functional Description

The 'F544 contains two sets of eight D-type latches, with separate input and output controls for each set. For data flow from A to B, for example, the A-to-B Enable ($\overline{CEAB}$) input must be LOW in order to enter data from $\overline{A_0}-\overline{A_7}$ or take data from $\overline{B_0}-\overline{B_7}$, as indicated in the Data I/O Control Table. With $\overline{CEAB}$ LOW, a LOW signal on the A-to-B Latch Enable ($\overline{LEAB}$) input makes the A-to-B latches transparent; a subsequent LOW-to-HIGH transition of the $\overline{LEAB}$ signal puts the A latches in the storage mode and their outputs no longer change with the A inputs. With $\overline{CEAB}$ and $\overline{OEAB}$ both LOW, the TRI-STATE® B output buffers are active and reflect the data present at the output of the A latches. Control of data flow from B to A is similar, but using the $\overline{CEBA}$, $\overline{LEBA}$ and $\overline{OEBA}$ inputs.

Data I/O Control Table

Inputs			Latch Status	Output Buffers
$\overline{CEAB}$	$\overline{LEAB}$	$\overline{OEAB}$		
H	X	X	Latched	High Z
X	H	X	Latched	—
L	L	X	Transparent	—
X	X	H	—	High Z
L	X	L	—	Driving


H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

A-to-B data flow shown; B-to-A flow control is the same, except using $\overline{CEBA}$, $\overline{LEBA}$ and $\overline{OEBA}$

Logic Diagram

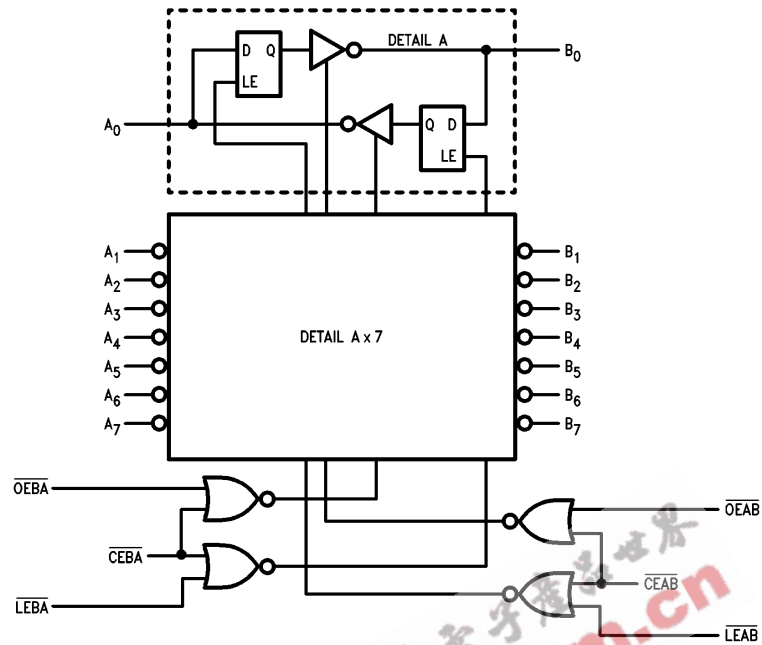

TL/F/9555-5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
Plastic	−55°C to +150°C
V _{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Voltage Applied to Output in HIGH State (with V _{CC} = 0V)	−0.5V to V _{CC}
Standard Output	−0.5V to +5.5V
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I _{OL} (mA)

Recommended Operating Conditions

Free Air Ambient Temperature	−55°C to +125°C
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter	54F/74F			Units	V _{CC}	Conditions
		Min	Typ	Max			
V _{IH}	Input HIGH Voltage	2.0			V		Recognized as a HIGH Signal
V _{IL}	Input LOW Voltage			0.8	V		Recognized as a LOW Signal
V _{CD}	Input Clamp Diode Voltage			−1.2	V	Min	I _{IN} = −18 mA (except $\bar{A}_n, \bar{B}_n$)
V _{OH}	Output HIGH Voltage	54F 10% V _{CC}	2.5		V	Min	I _{OH} = −1 mA ($\bar{A}_n$)
		54F 10% V _{CC}	2.4				I _{OH} = −3 mA ($\bar{A}_n, \bar{B}_n$)
		54F 10% V _{CC}	2.0				I _{OH} = −12 mA ($\bar{B}_n$)
		74F 10% V _{CC}	2.5				I _{OH} = −1 mA ($\bar{A}_n$)
		74F 10% V _{CC}	2.4				I _{OH} = −3 mA ($\bar{A}_n, \bar{B}_n$)
		74F 10% V _{CC}	2.0				I _{OH} = −15 mA ($\bar{B}_n$)
		74F 5% V _{CC}	2.7				I _{OH} = −1 mA ($\bar{A}_n$)
		74F 5% V _{CC}	2.7				I _{OH} = −3 mA ($\bar{A}_n, \bar{B}_n$)
V _{OL}	Output LOW Voltage	54F 10% V _{CC}		0.5	V	Min	I _{OL} = 20 mA ($\bar{A}_n$)
		54F 10% V _{CC}		0.55			I _{OL} = 48 mA ($\bar{B}_n$)
		74F 10% V _{CC}		0.5			I _{OL} = 24 mA ($\bar{A}_n$)
		74F 10% V _{CC}		0.55			I _{OL} = 64 mA ($\bar{B}_n$)
I _{IH}	Input HIGH Current	54F		20.0	μA	Max	V _{IN} = 2.7V (except $\bar{A}_n, \bar{B}_n$)
		74F		5.0			
I _{BVI}	Input HIGH Current Breakdown Test	54F		100	μA	Max	V _{IN} = 7.0V (except $\bar{A}_n, \bar{B}_n$)
		74F		7.0			
I _{BVIT}	Input HIGH Current Breakdown (I/O)	54F		1.0	mA	Max	V _{IN} = 5.5V ($\bar{A}_n, \bar{B}_n$)
		74F		0.5			
I _{CEX}	Output HIGH Leakage Current	54F		250	μA	Max	V _{OUT} = V _{CC} ($\bar{A}_n, \bar{B}_n$)
		74F		250			
V _{ID}	Input Leakage Test	74F	4.75		V	0.0	I _{ID} = 1.9 μA All Other Pins Grounded
I _{OD}	Output Leakage Circuit Current	74F		3.75	μA	0.0	V _{IOD} = 150 mV All Other Pins Grounded
I _{IL}	Input LOW Current			−0.6	mA	Max	V _{IN} = 0.5V ($\overline{OEAB}, \overline{OEBA}$)
				−1.2			V _{IN} = 0.5V ($\overline{CEAB}, \overline{CEBA}$)
I _{IH} + I _{OZH}	Output Leakage Current			70	μA	Max	V _{OUT} = 2.7V ($\bar{A}_n, \bar{B}_n$)
I _{IL} + I _{OZL}	Output Leakage Current			−650	μA	Max	V _{OUT} = 0.5V ($\bar{A}_n, \bar{B}_n$)


DC Electrical Characteristics (Continued)							
Symbol	Parameter	54F/74F			Units	V _{CC}	Conditions
		Min	Typ	Max			
I _{OS}	Output Short-Circuit Current	−60 −100		−150 −225	mA	Max	V _{OUT} = 0V ($\overline{A}_n$) V _{OUT} = 0V ($\overline{B}_n$)
I _{ZZ}	Bus Drainage Test			500	μA	0.0V	V _{OUT} = 5.25V ($\overline{A}_n$, $\overline{B}_n$)
I _{CCH}	Power Supply Current		70	105	mA	Max	V _O = HIGH
I _{CCL}	Power Supply Current		85	130	mA	Max	V _O = LOW
I _{CCZ}	Power Supply Current		83	125	mA	Max	V _O = HIGH Z

AC Electrical Characteristics									
Symbol	Parameter	74F			54F		74F		Units
		T _A = +25°C V _{CC} = +5.0V C _L = 50 pF			T _A , V _{CC} = Mil C _L = 50 pF		T _A , V _{CC} = Com C _L = 50 pF		
		Min	Typ	Max	Min	Max	Min	Max	
t _{PLH} t _{PHL}	Propagation Delay Transparent Mode $\overline{A}_n$ to $\overline{B}_n$ or $\overline{B}_n$ to $\overline{A}_n$	3.0 3.0	7.0 5.0	9.5 6.5	3.0 2.5	12.0 8.5	3.0 3.0	10.5 7.5	ns
t _{PLH} t _{PHL}	Propagation Delay LEBA to $\overline{A}_n$	6.0 4.0	10.0 7.0	13.0 9.5	6.0 4.0	18.0 11.5	6.0 4.0	14.5 10.5	ns
t _{PLH} t _{PHL}	Propagation Delay LEAB to $\overline{B}_n$	6.0 4.0	10.0 7.0	13.0 9.5	6.0 4.0	18.0 11.5	6.0 4.0	14.5 10.5	ns
t _{PZH} t _{PZL}	Output Enable Time $\overline{OEBA}$ or $\overline{OEAB}$ to $\overline{A}_n$ or $\overline{B}_n$ $\overline{CEBA}$ or $\overline{CEAB}$ to $\overline{A}_n$ or $\overline{B}_n$	3.0 4.0	7.0 7.5	9.0 10.5	3.0 4.0	11.0 13.0	3.0 4.0	10.0 12.0	ns
t _{PHZ} t _{PLZ}	Output Disable Time $\overline{OEBA}$ or $\overline{OEAB}$ to $\overline{A}_n$ or $\overline{B}_n$ $\overline{CEBA}$ or $\overline{CEAB}$ to $\overline{A}_n$ or $\overline{B}_n$	1.0 2.5	6.0 5.5	8.0 10.5	2.0 2.0	10.0 9.5	1.0 2.5	9.0 11.5	

AC Operating Requirements								
Symbol	Parameter	74F		54F		74F		Units
		T _A = +25°C V _{CC} = +5.0V		T _A , V _{CC} = Mil		T _A , V _{CC} = Com		
		Min	Max	Min	Max	Min	Max	
t _s (H) t _s (L)	Setup Time, HIGH or LOW $\overline{A}_n$ or $\overline{B}_n$ to LEBA or LEAB	3.0 3.0		3.0 3.0		3.0 3.0		ns
t _h (H) t _h (L)	Hold Time, HIGH or LOW $\overline{A}_n$ or $\overline{B}_n$ to LEBA or LEAB	3.0 3.0		3.0 3.0		3.0 3.0		
t _w (L)	Latch Enable, B to A Pulse Width, LOW	6.0		9.0		7.5		ns

Ordering Information

The device number is used to form part of a simplified purchasing code where the package type and temperature range are defined as follows:

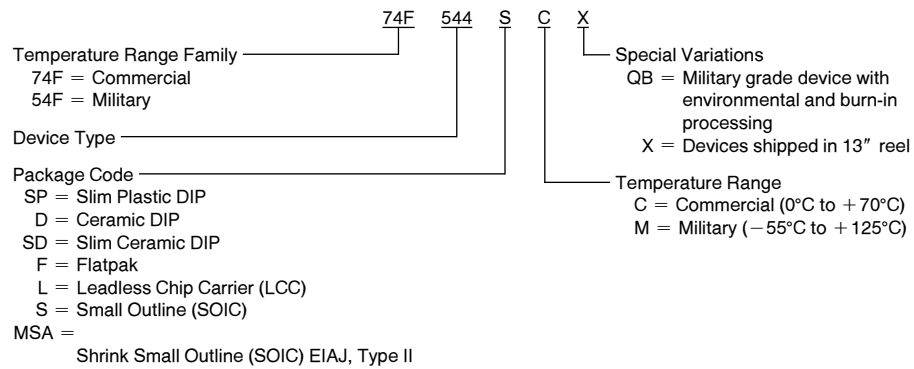

EEPW 电子產品世界
.com.cn

Technical drawing of a square micro-component, showing dimensions and views.

TOP VIEW: Overall dimensions are 0.450 ± 0.008 (width) and 0.450 ± 0.008 (height).

BOTTOM VIEW: Dimensions include:

- Top edge: 0.015 MIN TYP (fillet), 0.300 ± 0.005 TYP (width), $45^\circ \times 0.015 \pm 0.010$ (fillet angle and height).
- Right edge: $R 0.011$ TYP (radius), 0.028 TYP (width), 0.022 TYP (width).
- Bottom edge: 0.055 TYP (width), 0.045 TYP (width), 19 (feature number), $45^\circ \times 0.040 \pm 0.010$ (fillet angle and height), 3 PLCS (plating).
- Left edge: 0.093 (width), 0.077 (width), 25 (feature number), 26 (feature number), 4 (feature number), 11 (feature number), 12 (feature number), 0.083 TYP (width), 0.067 TYP (width).
- Pin #1 INDEX (location).

SIDE VIEW: Dimensions include:

- Top edge: 0.075 (width), 0.063 (width).
- Bottom edge: 0.003 MIN TYP (width), 0.015 MAX TYP (width), 0.022 MAX TYP (width), 0.006 MIN TYP (width).
- DETAIL A (location).

DETAIL A: Shows a cross-section of the component, highlighting the internal structure and the 0.006 MIN TYP dimension.

E28A (REV D)

Technical drawing of a 12-pin connector assembly, showing dimensions in inches and millimeters.

Top View Dimensions:

- Overall width: 1.290 (32.766) MAX
- Pin pitch (between pins 13 and 14): 0.060 (1.524) MAX GLASS
- Pin pitch (between pins 17 and 18): 0.0514-0.0526 (13.06-13.36)
- Pin pitch (between pins 21 and 22): 0.025 (0.635) RAD
- Pin pitch (between pins 25 and 26): 0.030-0.055 (0.762-1.397) RAD TYP

Side View Dimensions:

- Overall height: 0.590-0.620 (14.986-15.748)
- Pin height: 0.008-0.012 (0.203-0.305)
- Pin pitch (between pins 1 and 2): 0.100 ± 0.010 (2.540 ± 0.254)
- Pin pitch (between pins 7 and 8): 0.018 ± 0.003 (0.457 ± 0.076)
- Pin pitch (between pins 11 and 12): 0.125-0.200 (3.175-5.080) MIN
- Pin pitch (between pins 15 and 16): 0.150 (3.810) MIN

Detail View Dimensions:


- Pin pitch (between pins 1 and 2): 0.005 (0.127) MIN
- Pin pitch (between pins 7 and 8): 0.055 ± 0.005 (1.397 ± 0.127)
- Pin pitch (between pins 11 and 12): 0.020-0.070 (0.508-1.778)
- Pin pitch (between pins 15 and 16): 0.180 (4.572) MAX

Other Dimensions:

- Pin pitch (between pins 1 and 2): 0.685 ± 0.025 (17.40 ± 0.635)
- Pin pitch (between pins 7 and 8): 0.098 (2.489) MAX
- Pin pitch (between pins 11 and 12): 0.0125-0.0150 (0.3175-0.3810) MIN


24-Lead Ceramic Dual-In-Line Package (D)
NS Package Number J24A

Physical Dimensions inches (millimeters) (Continued)

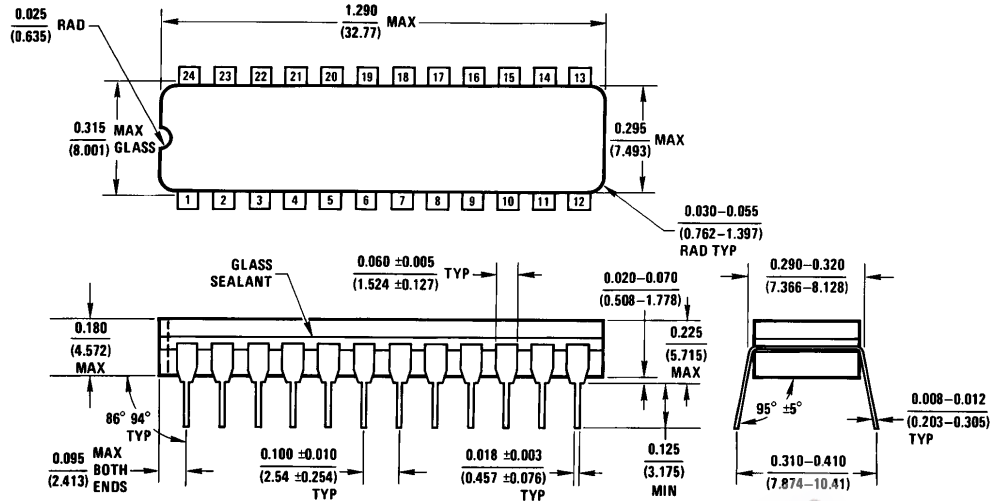

J24F (REV G)


24-Lead (0.300" Wide) Ceramic Dual-In-Line Package (SD)
NS Package Number J24F

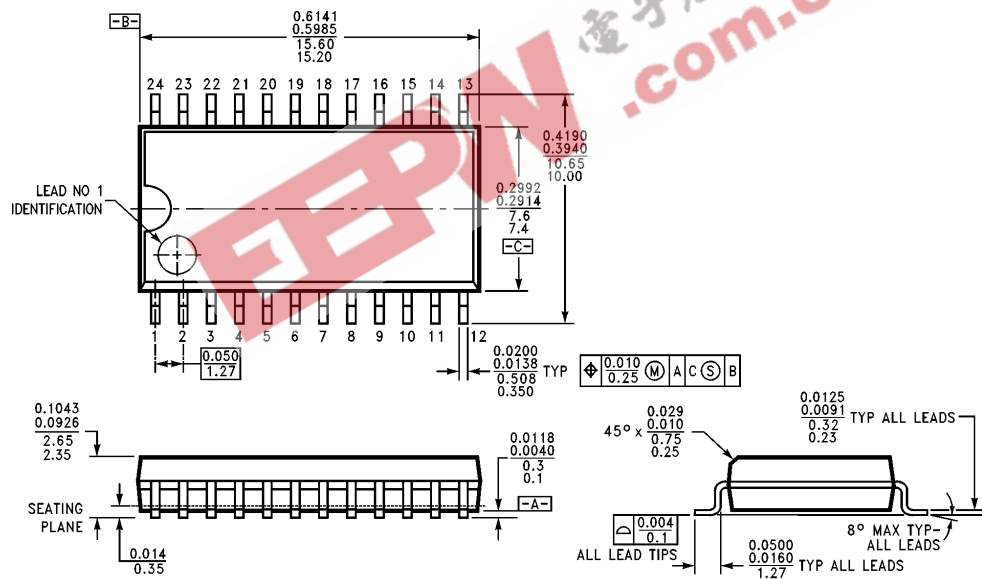


M24B (REV F)

24-Lead (0.300" Wide) Molded Small Outline Package, JEDEC (S)
NS Package Number M24B


Physical Dimensions inches (millimeters) (Continued)

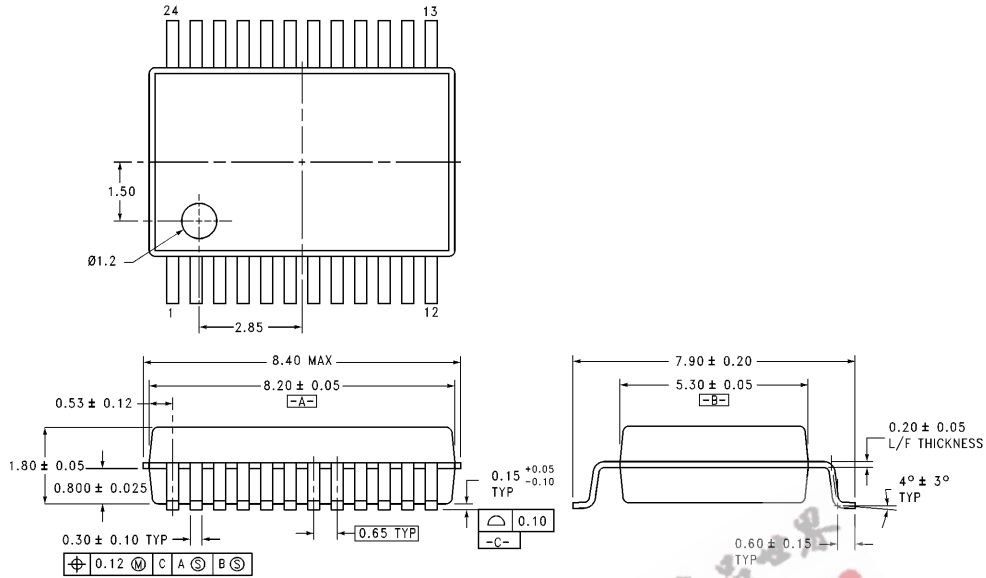

24-Lead Molded Shrink Small Outline, EIAJ, Type II (MSA)
NS Package Number MSA24

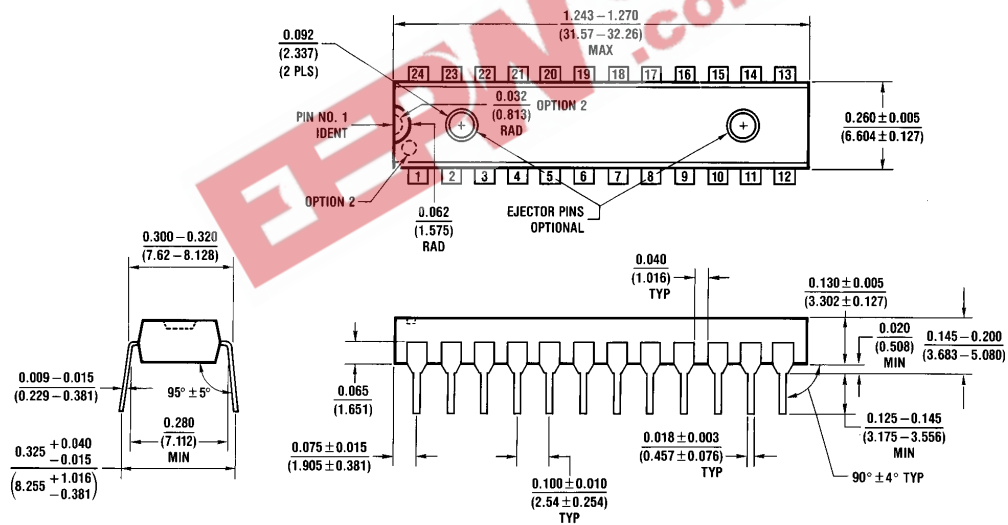

24-Lead (0.300" Wide) Molded Dual-In-Line Package (SP)
NS Package Number N24C

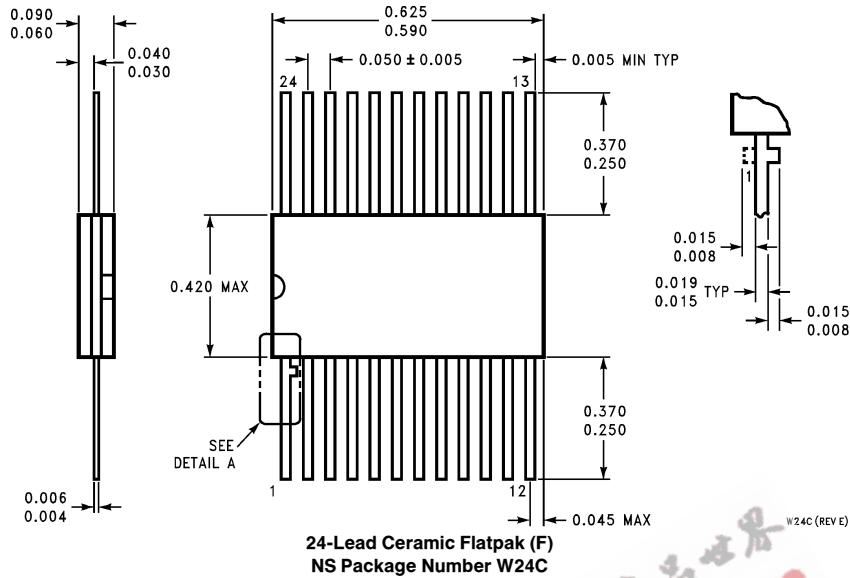Physical Dimensions inches (millimeters) (Continued)**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
2900 Semiconductor Drive
P.O. Box 58090
Santa Clara, CA 95052-8090
Tel: 1 (800) 272-9959
TWX: (910) 339-9240

National Semiconductor GmbH
Livry-Gargan-Str. 10
D-82256 Fürstentfeldbruck
Germany
Tel: (81-41) 35-0
Telex: 527649
Fax: (81-41) 35-1

National Semiconductor Japan Ltd.
Sumitomo Chemical
Engineering Center
Bldg. 7F
1-7-1, Nakase, Mihama-Ku
Chiba-City,
Chiba Prefecture 261
Tel: (043) 299-2300
Fax: (043) 299-2500

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semicondutores Do Brazil Ltda.
Rue Deputado Lacorda Franco
120-3A
Sao Paulo-SP
Brazil 05418-000
Tel: (55-11) 212-5066
Telex: 391-1131931 NSBR BR
Fax: (55-11) 212-1181

National Semiconductor (Australia) Pty, Ltd.
Building 16
Business Park Drive
Monash Business Park
Nottingham, Melbourne
Victoria 3168 Australia
Tel: (3) 558-9888
Fax: (3) 558-9898

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.