


M2250 Series

5x7 mm, 2.5 Volt, HCMOS/TTL, Clock Oscillator




- 2.5 Volt Operation
- Standby Option
- High density boards, low power circuits, portable test sets

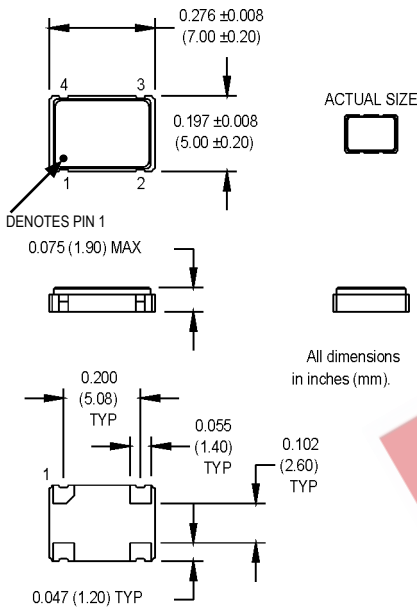

Pin Connections

| PIN | FUNCTION |
|-----|---------------------------|
| 1 | N/C, Tri-state or Standby |
| 2 | Ground |
| 3 | Output |
| 4 | +Vdd |

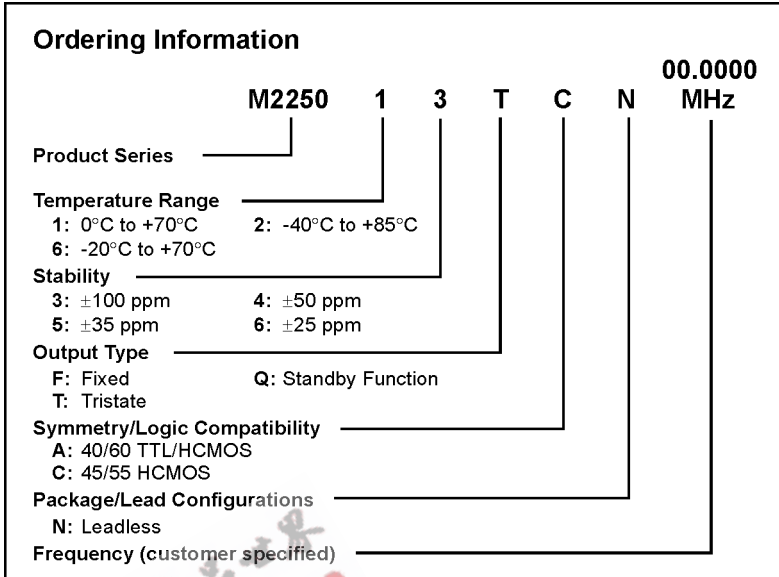

| | PARAMETER | Symbol | Min. | Typ. | Max. | Units | Condition |
|---------------------------|---------------------------|--|---|------|---------------------|--------|--------------------|
| Electrical Specifications | Frequency Range | F | 1.0 | | 125 | MHz | See Note 1 |
| | Frequency Stability | $\Delta F/F$ | (See Ordering Information) | | | | |
| | Operating Temperature | T _A | (See Ordering Information) | | | | |
| | Storage Temperature | T _s | -55 | | +125 | °C | |
| | Input Voltage | V _{dd} | 2.375 | 2.5 | 2.625 | V | |
| | Input Current | I _{dd} | | | 30 | mA | |
| | Standby Current | | | | 10 | μA | Standby Mode |
| | Symmetry (Duty Cycle) | | (See Ordering Information) | | | | |
| | Load | | | | 15/10 | pF/TTL | |
| | Rise/Fall Time | T _r /T _f | | | 6 | ns | Ref. 0.25 - 2.25 V |
| | Logic "1" Level | V _{oh} | 90% V _{dd} | | | V | HCMOS Load |
| | Logic "0" Level | V _{ol} | | | 10% V _{dd} | V | HCMOS Load |
| | Cycle to Cycle Jitter | | | 8 | 15 | ps RMS | 1 Sigma |
| | Standby/Tristate Function | | Input Logic "1" or floating; output active Input Logic "0"; output to high-Z | | | | |
| Environmental | Mechanical Shock | Per MIL-STD-202, Method 213, Condition C | | | | | |
| | Vibration | Per MIL-STD-202, Method 201 & 204 | | | | | |
| | Hermeticity | Per MIL-STD-202, Method 112 (1 x 10 ⁻⁶ at m.cc/s of helium) | | | | | |
| | Solderability | Per EIAJ-STD-002 | | | | | |

1. Not all frequencies are available. Please contact factory for availability.

NOTE: A capacitor of value 0.01 μF or greater between V_{dd} and Ground is recommended.

MtronPTI Lead Free Solder Profile

