



TO-5 Photocells

Hermetic Package

Features


- Six Photoconductive Materials
- Tolerance: $\pm 40\%$ @ 1 ftc, $\pm 33\%$ @ 2 ftc

Description

The Silonex TO-5 series of photocells provide up to seven standard resistance ranges in CdS or CdSe materials.

Absolute Maximum Ratings

Operating & Storage Temperature -60°C to $+75^{\circ}\text{C}$
 Power Dissipation @ 25°C (1) 200 mW

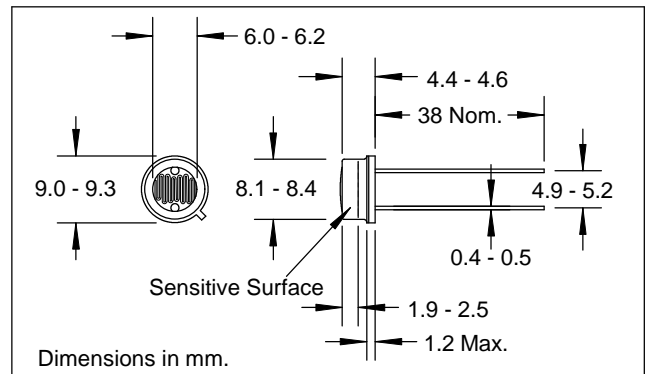

Electrical Characteristics ($T_A=25^{\circ}\text{C}$, source at 2854°K)

Silonex Part No	Sensitive Material	Spectral Peak (nm)	R @ 1 ftc (Kohms) (3)	R @ 2 ftc (Kohms) (3)	R _{TYP} @ 100 ftc (ohms)	Min. R _{DARK} (Mohms) (2)	V _{MAX} (Volts) (peak AC or DC)
NSL-3510	Type 3 CdSe	725		2.7	200	18	120
NSL-3520			5.4	300	36	120	
NSL-3530			66	5,000	440	320	
NSL-3540			132	10,000	880	320	
NSL-4510	Type 4 CdS	515	43	3.3	1,000	2.5	120
NSL-4520			18.6	10	400	1.0	120
NSL-4530			8.0	230	0.40	120	
NSL-4540			3.5	120	0.10	120	
NSL-4550			330	8,000	20	320	
NSL-4560			155	4,600	10	320	
NSL-4570			65	3,800	4.0	320	
NSL-5510	Type 5 CdS	550		3.3	300	0.22	120
NSL-5520			10	700	0.67	120	
NSL-5530			165	10,000	11	320	
NSL-5540			30	1,000	20	120	
NSL-6510	Type 6 CdSe	690		0.60	50	0.40	120
NSL-6520			1.2	100	0.80	120	
NSL-6530			30	2,000	20	320	
NSL-7510	Type 7 CdS	615		2.7	250	0.45	120
NSL-7520			5.4	500	0.90	120	
NSL-7530			10	500	6.7	120	
NSL-7540			100	5,000	67	250	
NSL-7550			600	20,000	400	320	

Specifications subject to change without notice

103287 REV 2

- Notes: (1) derate linearly to zero at 75°C .
 (2) 5 sec. after removal of test light.
 (3) cells light adapted at 30 to 50 Ftc for 16 hrs minimum prior to electrical tests.

5200 St. Patrick St., Montreal
 Que., H4E 4N9, Canada
 Tel: 514-768-8000
 Fax: 514-768-8889

The Old Railway, Princes Street
 Ulverston, Cumbria, LA12 7NQ, UK
 Tel: 01 229 581 551
 Fax: 01 229 581 554