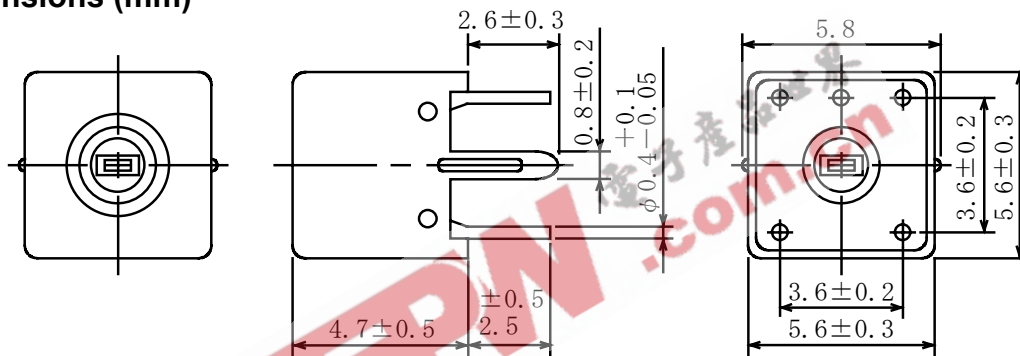


**Type: S-5E**
**◆ Product Description**


- 5.9×5.9mm Max.(L×W), 5.2mm Max. Height.
- Inductance: 1.0  $\mu$  H Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


**◆ Feature**

- Variable shielded type.
- RoHS Compliance

**◆ Dimensions (mm)**


- \* Dimension does not include solder used on coil.
- \* Pin pitch should be measured at the root of terminal.
- \* Dimensions without tolerance are approx.

**◆ Connection (Bottom View)**


“S” is winding start.

**◆ Specification (Part No. 2279-T039)**

Item	(1-4)	Measuring Condition
Tuning Capacity	52pF±1% Variable	100MHz
Unloaded Qu	Min.40	100MHz