





Pin carrier assemblies assure maximum ventilation and better visibility for inspection and repair

Easy mounting due to the disposable plastic carrier. No solder or flux wicking problems


Insertion characteristics:  
4-finger standard

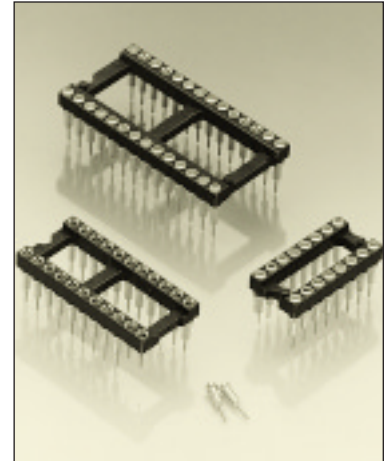

Platings	Sleeve 	Clip 	Pin 
91	5 $\mu$ m Sn Pb	0.25 $\mu$ m Au	
93	5 $\mu$ m Sn Pb	0.75 $\mu$ m Au	
99	5 $\mu$ m Sn Pb	5 $\mu$ m Sn Pb	

### Ordering information

For complete part number see Order Codes list below

No. of poles	Order Codes			Insulator dimensions 
	Plating 91	Plating 93	Plating 99	
	See page 50	A	B	C
10	612-91-210-41-001	612-93-210-41-001	612-99-210-41-001	Fig. 1 12.6 5.08 7.6
4	612-91-304-41-001	612-93-304-41-001	612-99-304-41-001	Fig. 2 5.0 7.62 10.1
6	612-91-306-41-001	612-93-306-41-001	612-99-306-41-001	Fig. 3 7.6 7.62 10.1
8	612-91-308-41-001	612-93-308-41-001	612-99-308-41-001	Fig. 4 10.1 7.62 10.1
10	612-91-310-41-001	612-93-310-41-001	612-99-310-41-001	Fig. 5 12.6 7.62 10.1
12	612-91-312-41-001	612-93-312-41-001	612-99-312-41-001	Fig. 5a 15.2 7.62 10.1
14	612-91-314-41-001	612-93-314-41-001	612-99-314-41-001	Fig. 6 17.7 7.62 10.1
16	612-91-316-41-001	612-93-316-41-001	612-99-316-41-001	Fig. 7 20.3 7.62 10.1
18	612-91-318-41-001	612-93-318-41-001	612-99-318-41-001	Fig. 8 22.8 7.62 10.1
20	612-91-320-41-001	612-93-320-41-001	612-99-320-41-001	Fig. 9 25.3 7.62 10.1
22	612-91-322-41-001	612-93-322-41-001	612-99-322-41-001	Fig. 10 27.8 7.62 10.1
24	612-91-324-41-001	612-93-324-41-001	612-99-324-41-001	Fig. 11 30.4 7.62 10.1
28	612-91-328-41-001	612-93-328-41-001	612-99-328-41-001	Fig. 12 35.5 7.62 10.1
20	612-91-420-41-001	612-93-420-41-001	612-99-420-41-001	Fig. 12a 25.3 10.16 12.6
22	612-91-422-41-001	612-93-422-41-001	612-99-422-41-001	Fig. 13 27.8 10.16 12.6
24	612-91-424-41-001	612-93-424-41-001	612-99-424-41-001	Fig. 14 30.4 10.16 12.6
28	612-91-428-41-001	612-93-428-41-001	612-99-428-41-001	Fig. 15 35.5 10.16 12.6
32	612-91-432-41-001	612-93-432-41-001	612-99-432-41-001	Fig. 16 40.6 10.16 12.6
10	612-91-610-41-001	612-93-610-41-001	612-99-610-41-001	Fig. 16a 12.6 15.24 17.7
24	612-91-624-41-001	612-93-624-41-001	612-99-624-41-001	Fig. 17 30.4 15.24 17.7
28	612-91-628-41-001	612-93-628-41-001	612-99-628-41-001	Fig. 18 35.5 15.24 17.7
32	612-91-632-41-001	612-93-632-41-001	612-99-632-41-001	Fig. 19 40.6 15.24 17.7
36	612-91-636-41-001	612-93-636-41-001	612-99-636-41-001	Fig. 20 45.7 15.24 17.7
40	612-91-640-41-001	612-93-640-41-001	612-99-640-41-001	Fig. 21 50.6 15.24 17.7
42	612-91-642-41-001	612-93-642-41-001	612-99-642-41-001	Fig. 22 53.2 15.24 17.7
48	612-91-648-41-001	612-93-648-41-001	612-99-648-41-001	Fig. 23 60.9 15.24 17.7
50	612-91-650-41-001	612-93-650-41-001	612-99-650-41-001	Fig. 24 63.4 15.24 17.7
52	612-91-652-41-001	612-93-652-41-001	612-99-652-41-001	Fig. 25 65.9 15.24 17.7
50	612-91-950-41-001	612-93-950-41-001	612-99-950-41-001	Fig. 26 63.4 22.86 25.3
52	612-91-952-41-001	612-93-952-41-001	612-99-952-41-001	Fig. 27 65.9 22.86 25.3
64	612-91-964-41-001	612-93-964-41-001	612-99-964-41-001	Fig. 28 81.1 22.86 25.3