

WP06R

5-6 Watt High Density, Wide Input Range DC/DC Converter



- 2:1 Input Voltage Range
- Operating Temperature Range: -40°C to +100°C
- Industrial Standard 24 Pin DIL
- Metal Case
- Low Profile 0.4 Inch
- Short Circuit Protection
- Temperature Shutdown
- Overvoltage Protection

The WP06R SERIES is a family of high performance DC/DC converters that offers regulated output power over three input voltage ranges of 9-18V, 18-36V, and 34-75V and over a wide operating temperature range of -40°C to +100°C without derating.

The 200kHz switching frequency and flyback converter topology provide

optimum performance in a space-saving package. The design utilizes all surface mounted components, including magnetics, to provide enhanced reliability. All models will operate under no-load conditions, although a minimum load is specified for load regulation measurement purposes.

The converter is packaged in a metal

case for improved EMI shielding and immunity, and for superior thermal performance.

Applications include: Telecommunications, Battery Powered Systems, Portable Instruments, Process Control Equipment, Transportation Equipment and Distributed Power Systems.

PRODUCT SELECTION CHART

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage, rated output current unless otherwise specified.

| MODEL* | NOMINAL INPUT VOLTAGE (VDC) | RATED OUTPUT VOLTAGE (VDC) | OUTPUT CURRENT (mA) | | INPUT CURRENT (mA) | | EFFICIENCY (%) |
|------------|-----------------------------|----------------------------|---------------------|------------|--------------------|------------|----------------|
| | | | MIN LOAD | RATED LOAD | MIN LOAD | RATED LOAD | |
| WP06R12S05 | 12 | 5.0 | 100 | 1,000 | 75 | 540 | 75 |
| WP06R12S12 | 12 | 12.0 | 42 | 416 | 75 | 520 | 77 |
| WP06R12S15 | 12 | 15.0 | 33 | 333 | 75 | 520 | 77 |
| WP06R12D05 | 12 | +/-5.0 | +/-50 | +/-500 | 75 | 540 | 75 |
| WP06R12D12 | 12 | +/-12.0 | +/-21 | +/-208 | 75 | 520 | 77 |
| WP06R12D15 | 12 | +/-15.0 | +/-17 | +/-167 | 75 | 520 | 77 |
| WP06R24S05 | 24 | 5.0 | 100 | 1,000 | 35 | 265 | 79 |
| WP06R24S12 | 24 | 12.0 | 50 | 500 | 40 | 305 | 80 |
| WP06R24S15 | 24 | 15.0 | 40 | 400 | 40 | 305 | 80 |
| WP06R24D05 | 24 | +/-5.0 | +/-50 | +/-500 | 35 | 265 | 79 |
| WP06R24D12 | 24 | +/-12.0 | +/-25 | +/-250 | 40 | 310 | 80 |
| WP06R24D15 | 24 | +/-15.0 | +/-20 | +/-200 | 40 | 310 | 80 |
| WP06R48S05 | 48 | 5.0 | 100 | 1,000 | 18 | 130 | 80 |
| WP06R48S12 | 48 | 12.0 | 50 | 500 | 22 | 150 | 81 |
| WP06R48S15 | 48 | 15.0 | 40 | 400 | 22 | 150 | 81 |
| WP06R48D05 | 48 | +/-5.0 | +/-50 | +/-500 | 18 | 133 | 78 |
| WP06R48D12 | 48 | +/-12.0 | +/-25 | +/-250 | 22 | 151 | 81 |
| WP06R48D15 | 48 | +/-15.0 | +/-20 | +/-200 | 22 | 151 | 81 |

NOTES: Other input to output voltages may be available. Please consult factory.

*A "P" at the end of the part number indicates positive ground option. "N" indicates negative ground option — this designator is mandatory.

SPECIFICATIONS, ALL MODELS

Specifications are at $T_A = +25^\circ\text{C}$ nominal input voltage, rated output current unless otherwise specified.

| | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------|--|---|------|-------|-------|-----------------|
| INPUT | Voltage Range | | 9 | 12 | 18 | V _{DC} |
| | | | 18 | 24 | 36 | V _{DC} |
| | | | 34 | 48 | 75 | V _{DC} |
| | Reflected Ripple Current | | 20 | | mAp-p | |
| OUTPUT | Rated Power | 12V Input Models | | | 5.0 | W |
| | | 5V Output Models | | | 5.0 | W |
| | | All Other Models | | | 6.0 | W |
| | Voltage Setpoint Accuracy | | | | ±1.5 | % |
| | Temperature Coefficient | | | ±0.02 | | %/°C |
| | Line Regulation - Singles | Low Line to High Line | | | ±0.25 | % |
| | Line Regulation - Duals | | | | ±1.0 | % |
| | Load Regulation - Singles | Min. Load to Rated Load | | | ±0.5 | % |
| | Load Regulation - Duals | | | | ±2.0 | % |
| | Ripple & Noise | BW = 5Hz to 20MHz | | 30 | 50 | mVp-p |
| GENERAL | ISOLATION | | | | | |
| | Rated Voltage | | 1500 | | | V _{DC} |
| | Test Voltage | 60 Hz, 10 Seconds | 1500 | | | VPK |
| | Resistance | | | 10 | | GΩ |
| | Capacitance | | | 200 | | pF |
| | Leakage Current | V _{iso} = 240VAC, 60Hz | | 15 | | μArms |
| | Switching Frequency | | | 200 | | KHz |
| | MTTF per MIL-HDBK-217, Rev. F Ground Benign | Circuit Stress Method T _A = +25°C | | 1200 | | KHr |
| | Package Weight | | | 15 | | g |
| | TEMPERATURE | | | | | |
| | Specification (Ambient) | | -40 | | +71 | °C |
| | Operation (Case) | Derate linearly from 71°C | -40 | | +100 | °C |
| | Storage | | -55 | | +125 | °C |

REMOTE ON/OFF CONTROL

Logic Compatibility CMOS or Open Collector TTL
 EOn Open Circuit or > 3VDC
 EC Off < 1VDC
 Shutdown Idle Current 1mA
 Control Common -Vin

ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Protection
 (At T_A+25°C, nominal input voltage) Continuous
 Internal Power Dissipation 1.5W
 Lead Temperature (Soldering, 10s Max) +300°C
 Max Case Temperature +100°C

ORDERING INFORMATION


Device Family _____ WP06R XXYZZ PN R
 5-6W regulated DC/DC

Model Number _____
 xx = Input Voltage
 y = Number of Outputs (S=single; D=dual)
 zz = Output Voltage

Ground Connection (Specify N=Neg. or P=Pos.) _____

Remote On/Off (Optional) _____

MECHANICAL

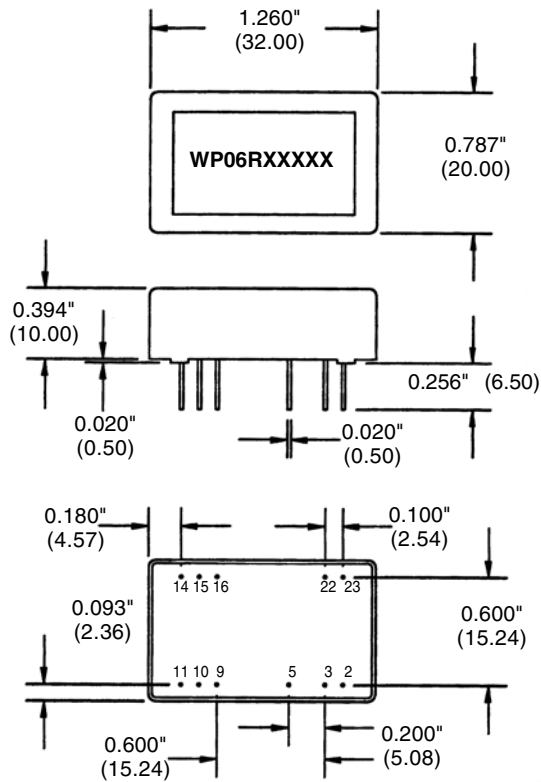


| PIN CONNECTIONS | | |
|-----------------|-------------------|-------------------|
| Number | Pin Function | |
| | Singles | Duals |
| 2 | -Vin | -Vin |
| 3 | -Vin | -Vin |
| 5 | On/Off (Optional) | On/Off (Optional) |
| 9 | No Connection | Com |
| 10 | No Connection | No Connection |
| 11 | No Connection | -Vout |
| 14 | +Vout | +Vout |
| 15 | No Connection | No Connection |
| 16 | -Vout | Com |
| 22 | +Vin | +Vin |
| 23 | +Vin | +Vin |


NOTES:

- 1) All dimensions in inches (mm)
- 2) Case is metal and lead material is brass with a solder plated surface to allow ease of solderability.

SIMPLIFIED CIRCUIT SCHEMATIC

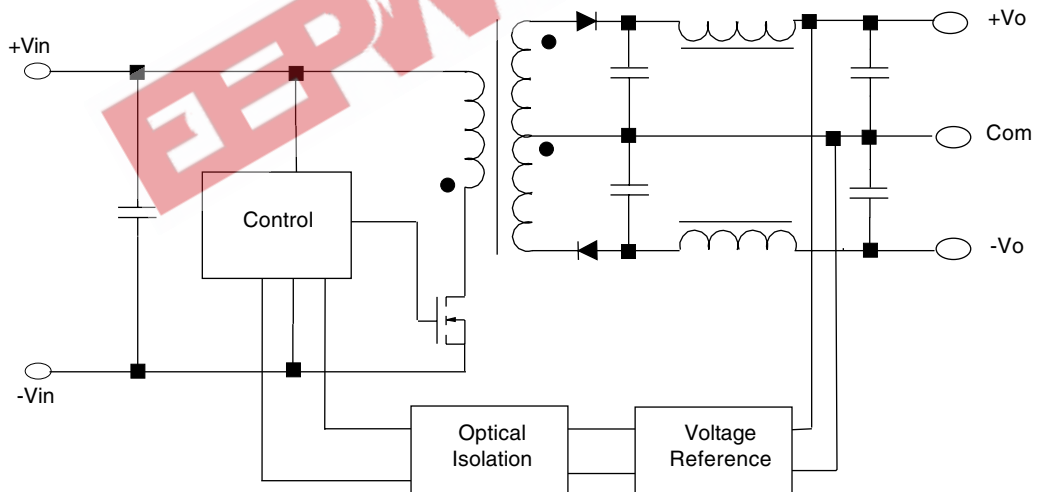

THERMAL DERATING CURVE

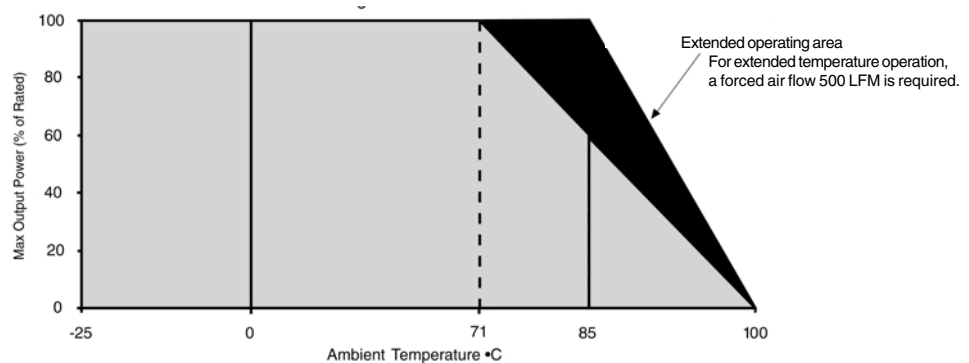

EEPW 电子產品世界
.com.cn

Power Electronics Division, United States
3400 E Britannia Drive, Tucson, Arizona 85706
Tel: 800.547.2537 Fax: 520.770.9369

C&D Technologies, (NCL)
Milton Keynes MK14 5BU UK
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.