

DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

EEBN 爱好者社区
.com.cn

74HC/HCT4024 **7-stage binary ripple counter**

Product specification

File under Integrated Circuits, IC06

December 1990

7-stage binary ripple counter**74HC/HCT4024****FEATURES**

- Output capability: standard
- I_{CC} category: MSI

GENERAL DESCRIPTION

The 74HC/HCT4024 are high-speed Si-gate CMOS devices and are pin compatible with the "4024" of the "4000B" series. They are specified in compliance with JEDEC standard no. 7A.

The 74HC/HCT4024 are 7-stage binary ripple counters with a clock input (\overline{CP}), an overriding asynchronous master reset input (MR) and seven fully buffered parallel outputs (Q_0 to Q_6).

QUICK REFERENCE DATA

GND = 0 V; T_{amb} = 25 °C; $t_r = t_f = 6$ ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			HC	HCT	
t_{PHL}/t_{PLH}	propagation delay \overline{CP} to Q_0	$C_L = 15$ pF; $V_{CC} = 5$ V	14	14	ns
f_{max}	maximum clock frequency		90	70	MHz
C_I	input capacitance		3.5	3.5	pF
C_{PD}	power dissipation capacitance per package	notes 1 and 2	25	27	pF

Notes

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$$
 where:
 f_i = input frequency in MHz
 f_o = output frequency in MHz
 $\sum (C_L \times V_{CC}^2 \times f_o)$ = sum of outputs
 C_L = output load capacitance in pF
 V_{CC} = supply voltage in V
2. For HC the condition is $V_I = GND$ to V_{CC}
For HCT the condition is $V_I = GND$ to $V_{CC} - 1.5$ V

ORDERING INFORMATION

See "*74HC/HCT/HCU/HCMOS Logic Package Information*".

7-stage binary ripple counter

74HC/HCT4024

PIN DESCRIPTION

PIN NO.	SYMBOL	NAME AND FUNCTION
1	\overline{CP}	clock input (HIGH-to-LOW, edge-triggered)
2	MR	master reset input (active HIGH)
12, 11, 9, 6, 5, 4, 3	Q_0 to Q_6	parallel outputs
7	GND	ground (0 V)
8, 10, 13	n.c.	not connected
14	V_{CC}	positive supply voltage

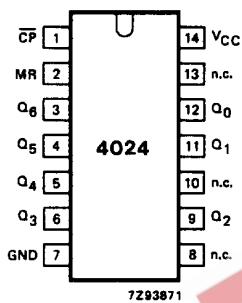


Fig.1 Pin configuration.




Fig.2 Logic symbol.

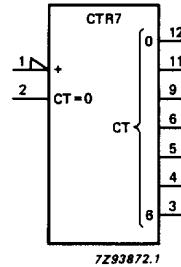


Fig.3 IEC logic symbol.

7-stage binary ripple counter

74HC/HCT4024

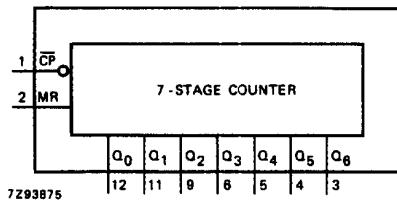


Fig.4 Functional diagram.

FUNCTION TABLE

INPUTS		OUTPUTS
\overline{CP}	MR	Q_n
\uparrow	L	no change
\downarrow	L	count
X	H	L

Notes

1. H = HIGH voltage level
- L = LOW voltage level
- X = don't care
- \uparrow = LOW-to-HIGH clock transition
- \downarrow = HIGH-to-LOW clock transition

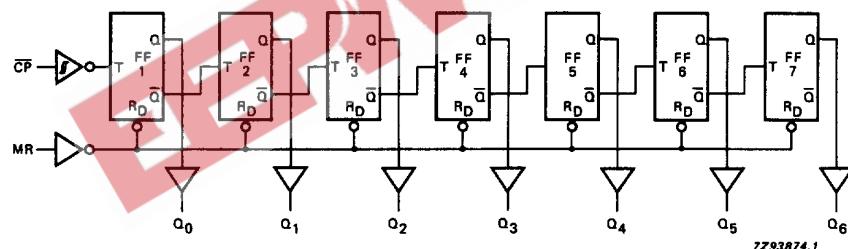


Fig.5 Logic diagram.

7-stage binary ripple counter

74HC/HCT4024

DC CHARACTERISTICS FOR 74HC

For the DC characteristics see "*74HC/HCT/HCU/HCMOS Logic Family Specifications*".

Output capability: standard

I_{CC} category: MSI

AC CHARACTERISTICS FOR 74HC

GND = 0 V; t_r = t_f = 6 ns; C_L = 50 pF

SYMBOL	PARAMETER	T _{amb} (°C)						UNIT	TEST CONDITIONS			
		74HC							V _{CC} (V)	WAVEFORMS		
		+25			−40 to +125		−40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
t _{PHL} / t _{PLH}	propagation delay CP to Q ₀	47 17 14	175 35 30		220 44 37		265 53 45	ns	2.0 4.5 6.0	Fig.6		
t _{PHL}	propagation delay MR to Q ₀	63 23 18	200 40 34		250 50 43		300 60 51	ns	2.0 4.5 6.0	Fig.6		
t _{PHL} / t _{PLH}	propagation delay Q _n to Q _{n+1}	25 9 7	80 16 14		100 20 17		120 24 20	ns	2.0 4.5 6.0	Fig.6		
t _{THL} / t _{TLH}	output transition time	19 7 6	75 15 13		95 19 16		110 22 19	ns	2.0 4.5 6.0	Fig.6		
t _W	clock pulse width HIGH or LOW	80 16 14	17 6 5		100 20 17		120 24 20	ns	2.0 4.5 6.0	Fig.6		
t _W	master reset pulse width HIGH	80 16 14	22 8 6		100 20 17		120 24 20	ns	2.0 4.5 6.0	Fig.6		
t _{rem}	removal time MR to CP	50 10 9	6 2 2		65 13 11		75 15 13	ns	2.0 4.5 6.0	Fig.6		
f _{max}	maximum clock pulse frequency	6.0 30 35	27 82 98		4.8 24 28		4.0 20 24	MHz	2.0 4.5 6.0	Fig.6		

7-stage binary ripple counter

74HC/HCT4024

DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see "74HC/HCT/HCU/HCMOS Logic Family Specifications".

Output capability: standard

I_{CC} category: MSI

Note to HCT types

The value of additional quiescent supply current (ΔI_{CC}) for a unit load of 1 is given in the family specifications.To determine ΔI_{CC} per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT
CP	0.75
MR	0.85

AC CHARACTERISTICS FOR 74HCT


GND = 0 V; t_r = t_f = 6 ns; C_L = 50 pF

SYMBOL	PARAMETER	T _{amb} (°C)						UNIT	TEST CONDITIONS			
		74HCT							V _{CC} (V)	WAVEFORMS		
		+25			−40 to +125		−40 to +125					
		min.	typ.	max.	min.	max.	min.	max.				
t _{PHL} / t _{PLH}	propagation delay CP to Q ₀		17	35		44		53	ns	4.5 Fig.6		
t _{PHL}	propagation delay MR to Q ₀		21	40		50		60	ns	4.5 Fig.6		
t _{PHL} / t _{PLH}	propagation delay Q _n to Q _{n+1}		9	16		20		24	ns	4.5 Fig.6		
t _{THL} / t _{TLH}	output transition time		7	15		19		22	ns	4.5 Fig.6		
t _W	clock pulse width HIGH or LOW	16	9		20		24		ns	4.5 Fig.6		
t _W	master reset pulse width HIGH	16	6		20		24		ns	4.5 Fig.6		
t _{rem}	removal time MR to CP	10	0		13		15		ns	4.5 Fig.6		
f _{max}	maximum clock pulse frequency	30	64		24		20		MHz	4.5 Fig.6		

7-stage binary ripple counter

74HC/HCT4024

AC WAVEFORMS

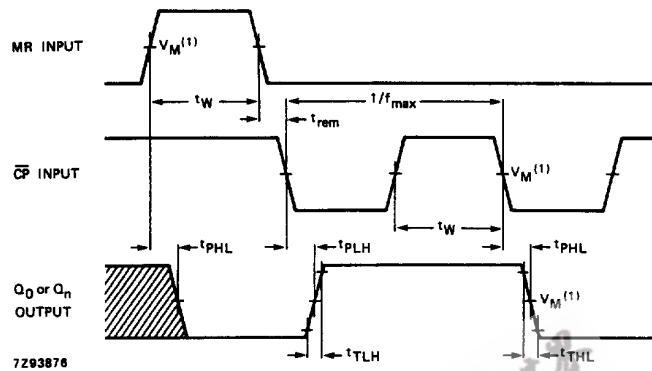

Also showing the master reset (MR) pulse width, the master reset to output (Q_n) propagation delays and the master reset to clock (CP) removal time.

(1) HC : $V_M = 50\%$; $V_I = \text{GND to } V_{CC}$.
HCT: $V_M = 1.3 \text{ V}$; $V_I = \text{GND to } 3 \text{ V}$.

Fig.6 Waveforms showing the clock (\overline{CP}) to output (Q_n) propagation delays, the clock pulse width, the output transition times and the maximum clock frequency.

PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".