


Power Integrated Module (PIM)


■ Features

- PT-Technology
- Solderable Package
- High Short Circuit Withstand-Capability
- Small Temperature Dependence of the Turn-Off Switching Loss
- Low Losses And Soft Switching

■ Equivalent Circuit

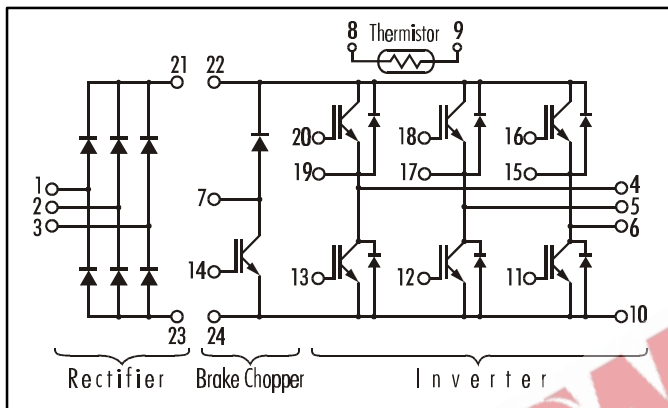

■ Outline Drawing

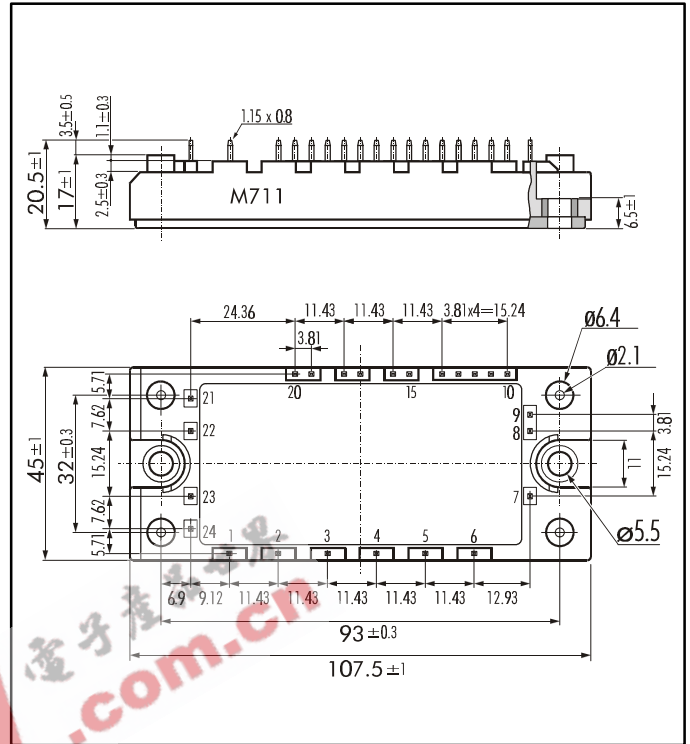

■ Absolute Maximum Ratings (T_c=25°C)

	Items	Symbols	Test Conditions	Ratings	Units	
Inverter	Collector-Emitter Voltage	V _{CES}		600	V	
	Gate -Emitter Voltage	V _{GES}		± 20		
	Collector Current	I _C		Continuous	50	A
		I _{C PULSE}		1ms	100	
		-I _{C PULSE}			50	
Collector Power Dissipation	P _C		1 device	200	W	
Rectifier	Repetitive Peak Reverse Voltage	V _{RRM}		800	V	
	Average Output Current	I _O	50Hz/60Hz sinus wave	50	A	
	Surge Current (Non Repetitive)	I _{FSM}	T _J =150°C, 10 ms, sinus wave	350	A ² s	
	I ² t (Non Repetitive)			613		
Brake Chopper	Collector-Emitter Voltage	V _{CES}		600	V	
	Gate -Emitter Voltage	V _{GES}		± 20		
	Collector Current	I _C		Continuous	30	A
		I _{C PULSE}		1ms	60	
	Collector Power Dissipation	P _C		1 device	120	W
Repetitive Peak Reverse Voltage	V _{RRM}			600	V	
Operating Junction Temperature	T _J			+150	°C	
Storage Temperature	T _{Stg}			-40 ~ +125		
Isolation Voltage	V _{ISO}		A.C. 1min.	2500	V	
Mounting Screw Torque*				3.5	Nm	







Note: *:Recommendable Value; 2.5 ~ 3.5 Nm (M5)







■ Electrical Characteristics ($T_j=25^\circ\text{C}$)





Items		Symbols	Test Conditions	Min.	Typ.	Max.	Units		
Inverter	IGBT	Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=600V$			1.0	mA	
		Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	nA	
		Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=50mA$	5.5	7.8	8.5	V	
		Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C = 50A$		1.8	2.40		
		Input Capacitance	C_{ies}	$f=1MHz$, $V_{GE}=0V$, $V_{CE}=10V$		5000		pF	
	Turn-on Time	t_{on}	$V_{CC} = 300V$			0.45	1.2	μs	
		$t_{r,x}$	$I_C = 50A$			0.25	0.6		
		$t_{r,i}$	$V_{GE} = \pm 15V$			0.08			
		Turn-off Time	t_{off}		$R_G = 51\Omega$		0.40		1.0
			t_f		Inductive Load		0.05		0.35
FRD	Diode Forward On-Voltage	V_F	$I_F=50A$	Chip		1.75	V		
	Reverse Recovery Time	t_{rr}	$I_F=50A$	Terminal		1.9	2.6		
Rectifier	Forward Voltage	V_{FM}	$I_F=50A$	Chip		1.1	V		
	Reverse Current	I_{RRM}	$V_R = 800V$	Terminal		1.2	1.5		
Brake Chopper	Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=600V$			1.0	mA		
	Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	nA		
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=30A$	Chip		1.80			
	Turn-on Time	t_{on}	$V_{CC} = 300V$	Terminal		1.95		2.4	
		$t_{r,x}$	$I_C = 30A$			0.45	1.2		
		t_{off}	$V_{GE} = \pm 15V$			0.25	0.6		
	Turn-off Time	t_f	$R_G = 82\Omega$			0.40	1.0		
Reverse Current		I_{RRM}	$V_R=600V$			0.05	0.35		
NTC	Resistance	R	$T= 25^\circ\text{C}$		5000		Ω		
			$T=100^\circ\text{C}$	465	495	520			
	B Value	B	$T=25 / 50^\circ\text{C}$	3305	3375	3450		K	

■ Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance (1 device)	$R_{th(j-c)}$	Inverter IGBT			0.63	$^\circ\text{C/W}$
		Inverter FRD			1.33	
		Brake IGBT			1.04	
		Rectifier Diode			2.42	
Contact Thermal Resistance	$R_{th(c-f)}$	With Thermal Compound		0.05		

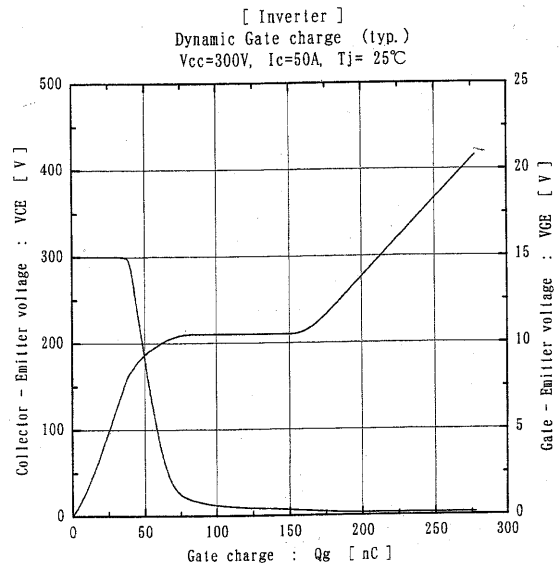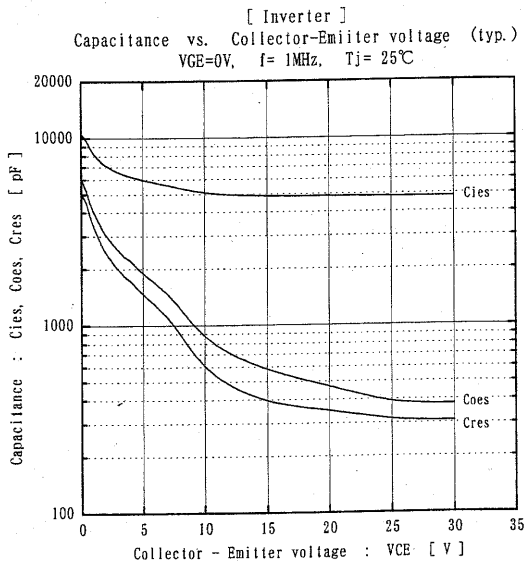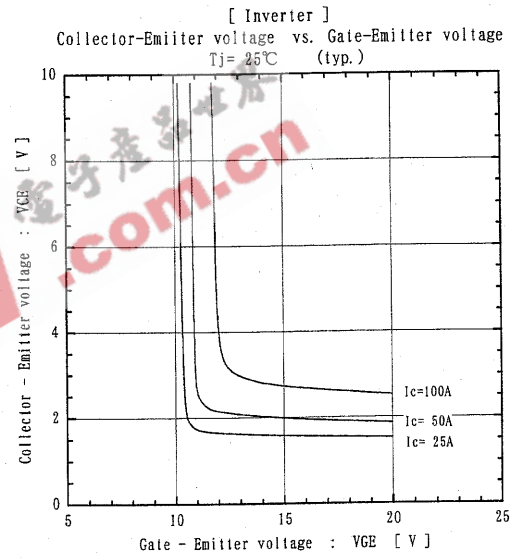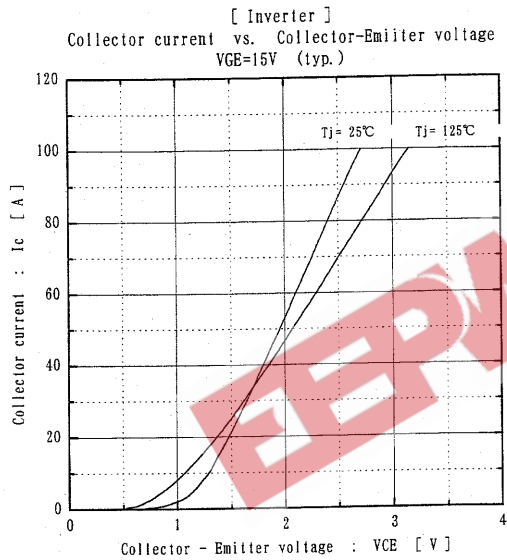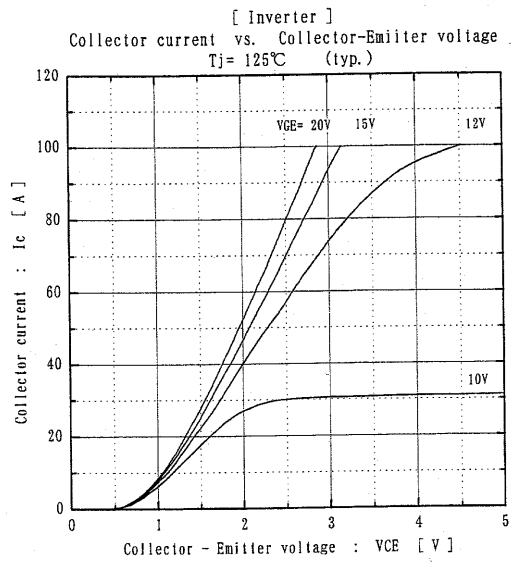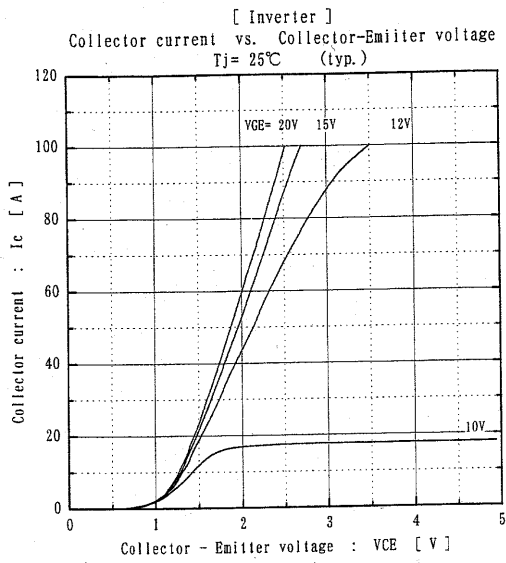

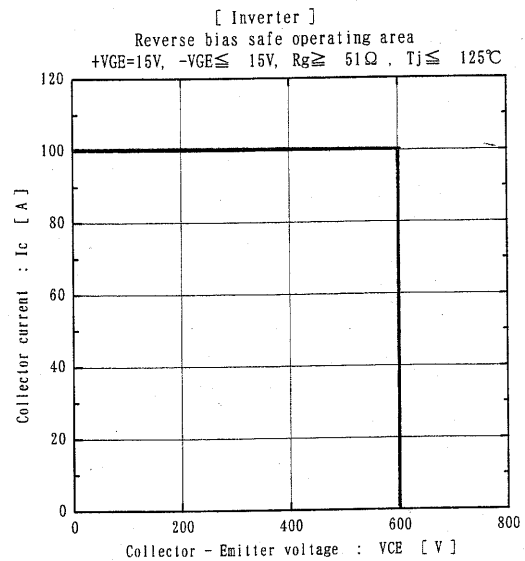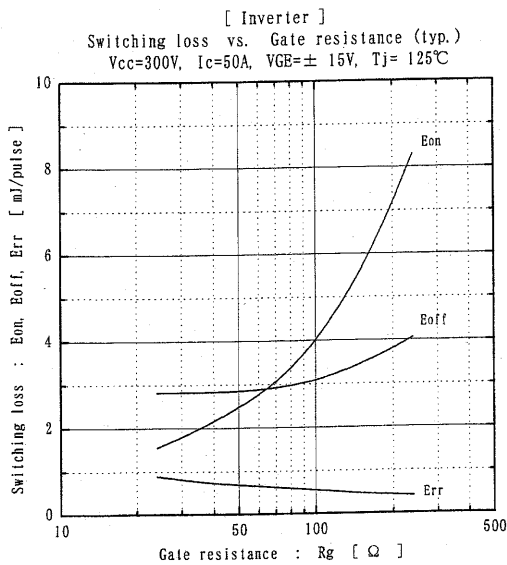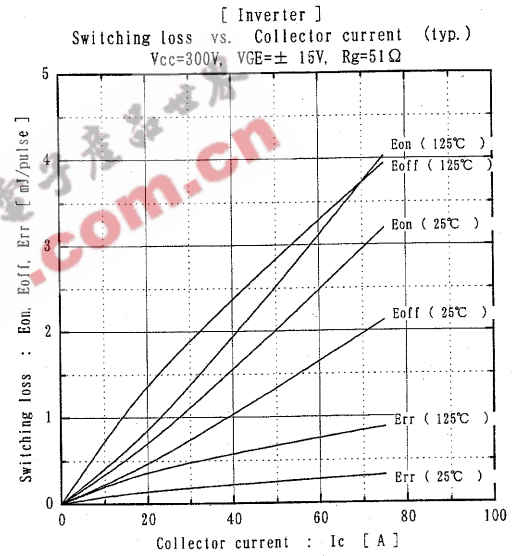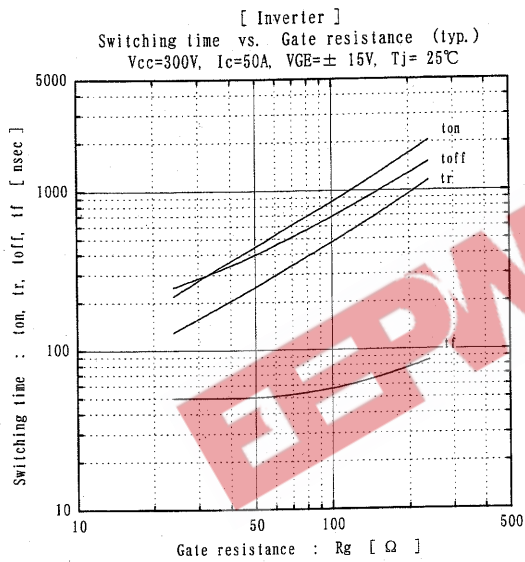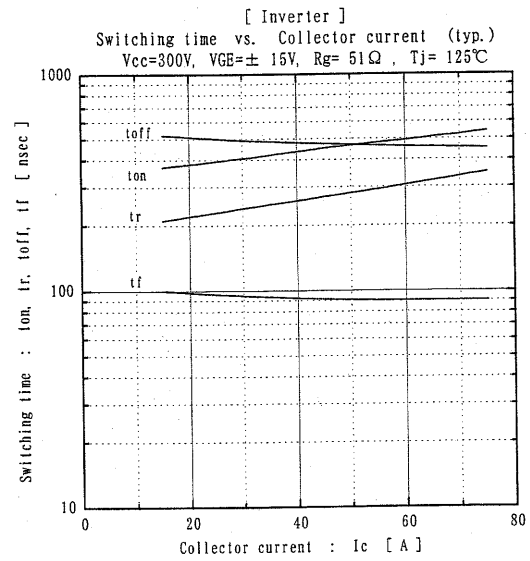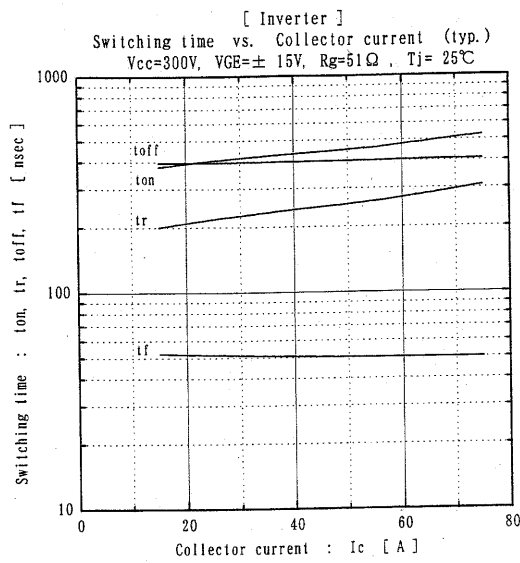

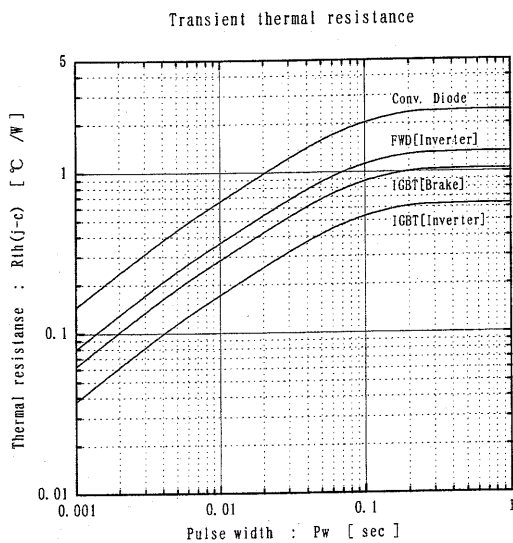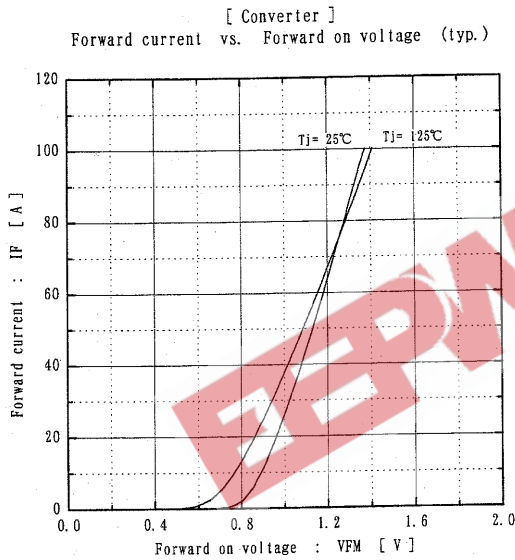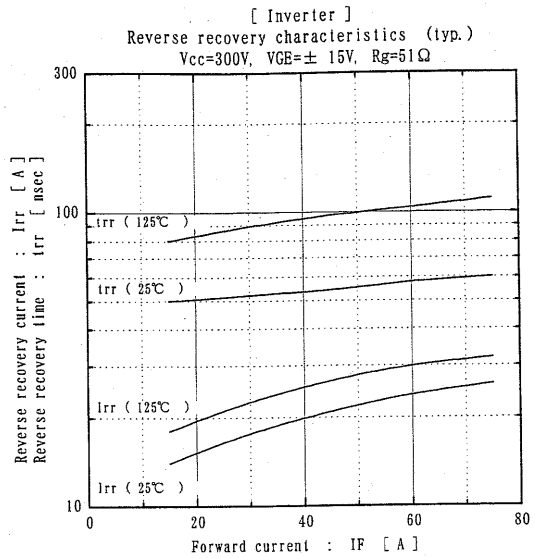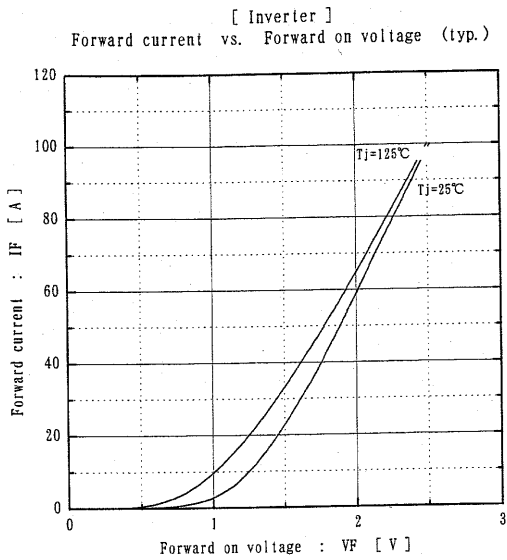

电子产品世界
www.eepw.com.cn

[Thermistor]
Temperature characteristic (typ.)

